INCH/POUND

A-A-1346A
February 6, 2002
SUPERSEDING
A-A-1346
January 14, 1980

COMMERCIAL ITEM DESCRIPTION

WRENCH, BOX, DOUBLE HEAD, 12 POINT, HALF-MOON


The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description covers wrenches suitable for use with hexagonal bolt heads and nuts.

2. CLASSIFICATION. Not applicable

3. SALIENT CHARACTERISTICS.

3.1 Design. Wrench opening shall be of a double hexagon (12 point) design. The handle shall afford a well proportioned, comfortable handgrip. Wrench dimensions and sizes shall conform to Section 3.2.

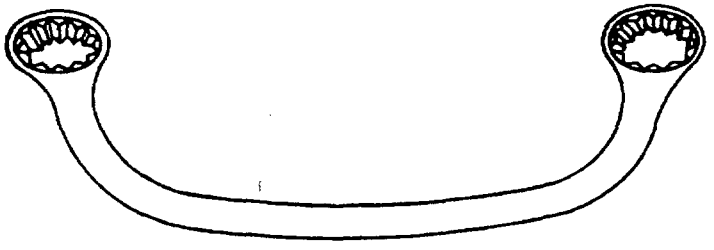

WRENCH, BOX

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Hardware Super Store(6FEE), 1500 E. Bannister Rd. Bldg. #6, Kansas City, Missouri. 64131.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

3.2 Dimensions and Sizes

Wrench Opening		Outside Diameter Of Head		Permitted Eccentricity Of Box Wrench Opening To Outside Diameter	Thickness Of Head		Distance Between Centers Of Openings
Small Head	Large Head	Small Head	Large Head		Small Head	Large Head	
Inch	Inch	Max. Inches	Max. Inches	Inch	Max. Inch	Max. Inch	Min. Inch
7/16	1/2	0.695	0.775	0.015	3/8	3/8	4-7/8
9/16	5/8	0.868	0.946	0.018	11/32	7/16	5-11/16
5/8	3/4	0.946	1.125	0.018	7/16	35/64	6-7/16
11/16	3/4	1.025	1.125	0.018	33/64	35/64	6-3/4

3.3 Materials. The materials used in the manufacturing of the wrenches shall be such as to produce wrenches conforming to the physical requirements hereinafter described.

3.4 Marking. Each wrench shall be marked with the size on one of the faces or on the handle as close to each head as is practicable in a plain and permanent manner. In addition to size markings, each wrench shall be marked in a plain and permanent manner with the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined.

3.5 Hardness. Wrenches shall be treated to a Rockwell C hardness not less that 38 nor more than 55 when tested per ASTM-E-18.

3.6 Wrench Opening. The nut and bolt head-engaging surfaces of the open-end wrench shall be finished in a smooth and well-defined manner. Tolerances shall be such as to insure acceptance when gaged with gages conforming to ASME B107.17M.

3.7 Finish.

3.7.1 Surface Finish. All surfaces shall be thoroughly cleaned, free from cracks, and essentially free from burrs, pits, nodules, and other detrimental deficiencies.

3.7.1.1 Minimum Area Surface Finish. A minimum of 180° of the outer periphery of the box ends (90° on each side of the longitudinal axis of the wrench) shall be bright and shall have a maximum roughness height value of 30 micro inches (0.76 micrometers).

3.7.2 Coatings. The coating shall be either chrome plate (3.7.2.1) or alternate coating (3.7.2.2). The coating shall be adherent, smooth, continuous, and free from uncoated areas, pits, blisters, nodules, and any other defects that would interfere with their protective value and serviceability.

3.7.2.1 Chrome Plate. Wrenches shall have a protective-decorative nickel-chromium plating. The nickel thickness shall be a minimum of 0.000150 inch. The chromium thickness shall be a minimum of 0.000003 inch. A nickel-iron undercoating (16% iron max.) may be substituted for nickel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

3.7.2.1.1 Chrome Plate Tests.

One measurement of the thickness of each electroplated coating shall be conducted in accordance with any of the following, as appropriate, methods:

ASTM B 487: Standard Method for Measurement of metal and oxide coating thickness by microscopical examination of a cross section.

ASTM B 499: Standard Test Method for Measurement of coating thickness by the magnetic method: nonmagnetic coatings of magnetic basis metals.

ASTM B 504: Standard Method for Measurement of thickness of metallic coatings by the coulometric method.

ASTM B 530: Standard Test Method for Measurement of coating thickness by the magnetic method: electrodeposited nickel coatings on magnetic and nonmagnetic substrates.

ASTM B 568: Standard Test Method for Measurement of coating thickness by x-ray spectrometry.

ASTM B 748: Standard Method for Measurement of thickness of metallic coatings by measurement of cross section with a scanning electron microscope.

ASTM A 754: Standard Test Method for Coating thickness by x-ray fluorescence.

Visible contact marks resulting from electroplating operations shall be confined to the interior of the wrenching and drive openings. Surfaces of the electroplated tool shall be adherent, smooth, continuous, and free of visible defects, such as blisters, pits, roughness, cracks, and uncoated areas. Surfaces shall not be stained or discolored and shall have a bright appearance.

The electroplated tool shall be clean and free of damage. The tool shall be tested for adhesion of electroplated materials in accordance with ASTM B571, Standard Test Methods for Adhesion of Metallic Coatings, by one of the following methods: Grind-Saw, Push, File, or Burnishing.

3.7.2.2. Alternative Coatings. Alternate coatings may be used in lieu of nickel - chromium and shall be subjected to the Alternative Coating Test as specified below.

3.7.2.2.1 Alternative Coating Test.
The test consists of an adhesion, abrasion, and corrosion test specified below:

Test Preparation. The quantity and condition of the wrenches used for the following testing shall be per the manufacturer's standard practice or as mutually agreed to by the manufacturer and the General Services Administration.

Adhesion Test. Sample wrenches shall pass the file or grind-saw test of ASTM B 571, Standard practice for qualitative adhesion testing of metallic coatings.

Abrasion Test. Sample wrenches shall have no base material exposed after being subjecting to100 liters of falling sand per ASTM D 968 Method A, Standard Test Method for abrasion resistance of organic coatings by falling abrasive.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

Corrosion Test. The exterior surfaces of sample wrenches shall be tested for corrosion resistance by exposure to a 72-hour salt spray test, as specified in ASTM B 117, Operating salt spray (FOG) apparatus, without falling below the ASTM B 537, Standard practice for rating of electroplated panels subjected to atmospheric exposure, rating of 6.

4. REGULATORY REQUIREMENTS.

4.1 Recovered Materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE.

5.1 Product Conformance. The product provided shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawing , specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Responsibility for Inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any of the inspections deemed necessary to assure the item conforms to the specified requirements.

6. PACKAGING. Preservation, packaging and marking shall be as specified in the contract or order.

7. NOTES. This section contains information of a general or explanatory nature that is not mandatory.

7.1 Source of Documents.

American Society of Mechanical Engineers(ASME), Manuel Gutierrez, Managing Director, 3 Park Avenue, New York, NY 10016.

American Society for Testing and Materials(ASTM), 100 Barr Harbor Dr., W. Conshohocken, PA, 19428-2959.

Federal Acquisition Regulation (FAR): Government Printing Office, Superintendent of Documents, Washington DC. 20401-9371.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents.

(a) Title, number and date of Commercial Item Description.
(b) Wrench Opening.
(c) Packaging requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

7.3 National Stock Numbers (NSN's). A list of NSN's assigned that correspond to this CID. The list may not be indicative of all possible NSN's associated with the CID.

NSN	Size	NSN	Size
5120-00-184-8631	7/16 x ½	5120-00-222-1597	5/8 x 3/4
5120-00-222-1596	9/16 x 5/8	5120-00-277-2682	11/16 x ¾

7.4 Key words. Wrench; Box; Double Head; 12-Point; Half-Moon.

MILITARY INTERESTS:
NONE: DoD has no registered interest in revisions and amendments to this Commercial Item Description until further notice.

Preparing Activity:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.