[INCH-POUND]
A-A-2860
December 21, 1993

COMMERCIAL ITEM DESCRIPTION

CABINET, TOOL, MOBILE

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for Type I, Style A, Style B, and Style C, of Federal Specification AA-C-45C.

1. SCOPE

1.1 Scope This commercial item description covers the requirements for hand-pushed mobile tool cabinets with wheels and casters for rolling the cabinet and tools to the job.

2. CLASSIFICATION

2.1 Classification This commercial item description covers the Type I, Two wheel, tilt-to-roll type and shall be of the following styles:

Style A - Two door, three-enclosed-drawer style.
Style B - Two door, seven-enclosed-drawer style.
Style C - Panel enclosed compartment, three drawer style.

3. SALIENT CHARACTERISTICS

3.1 Design and dimensions The mobile tool cabinets shall be designed for storing and transporting various powered and non-powered hand tools within a building or shop, and shall consist of various quantity of drawers and

"Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to General Services Administration 1500 East Bannister Road, Kansas City Mo. 64131-3088

FSC 5140

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:26Z
Check the source to verify that this is the currentversion before use.

compartments, as specified by the style and illustrations provided in this commercial item description, and shall be in a container (shell) mounted on wheels and casters. Cabinets shall be equipped with two wheels and a handle on the opposite side of which the drawers open to provide the capability of tilting the cabinet back and rolling it like a hand truck. The rear wheels shall be a minimum of 10 inches in diameter by 2 inches wide, semi-pneumatic or solid rubber tires and ball or roller bearings in the axle portion of the wheels. The handhold portion of the handle shall have a rubber or plastic covering to facilitate gripping and prevent slipping. The handle shall also be adjustable to provide a comfortable position for operators of different heights. The tool cabinet sizes shall be in accordance with the dimensions specified for that style and as designated on the appropriate figure for that style. All dimensions shown are in inches. Tolerances shall be in accordance with standard commercial practice.

3.1.1 Construction The tool cabinet shall be suitable for industrial use. The cabinets shall be made, of quality commercial sheet steel of adequate gage, and reinforced where required, for the tool cabinet to withstand the load test and roll test set forth in paragraphs 4.4.1 and 4.4.2 . The front side of container shall provide access to the drawers and compartments. An integral lock (or locks) with two keys shall be provided to lock all drawers and compartments. All locks on all cabinets furnished in lots of 300 or less shall be keyed differently. The drawers are to be constructed so that when open, all contents in the drawer are visible.

3.1.2 Finish Surfaces not chemically treated or plated to resist corrosion shall have a durable baked enamel or epoxy plastic finish. Unless a particular color is specified in the contract, the color of the enamel shall be commercial red.

3.2 Style A and style B Style A and style B shall be similar to figure 1. The overall dimensions, excluding projections, shall be width- 28 inches minimum, 30 inches maximum; depth- 18 inches minimum; height- 35 inches minimum, 37 inches maximum. The cabinet shall stand upright on four pedestal supports, or two pedestal supports and the two rear wheels. A back guard is to be provided extending 3 inches above the top surface of the cabinet and made of a minimum 20 gage steel. The two equal size doors of the cabinet shall be constructed so as they remain closed under any conditions unless intentionally opened. The doors shall be able to support a minimum of 25 pounds of tools hanging on each door. One door shall have a rack with four evenly spaced shelves with a 2 inch flange to keep tools from falling out, The other door shall be provided with a steel peg board, with holes 1 inch on center and three tension springs suitable for holding hanging tools taut and in position. Doors shall have handles and a means for locking the doors.

3.2.1 Style A Style A cabinet shall be similar to figure 2, with three full width drawers. The three drawers combined shall have a capacity of 1000 cubic inches. The top compartment shall be a minimum of 6 inches high with flange on the front of compartment bottom so that tools will not fall off the shelf when moved around.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:26Z
Check the source to verify that this is the currentversion before use.

3.2.2 Style B Style B cabinet shall be similar to figure 3, with a top compartment, a row of four drawers, a second compartment comparable in size to the top compartment, a second row of three drawers, and a third compartment on the bottom comprising of the remaining space. The upper four drawers shall be approximately 5 inches wide, 12 inches deep, and 1 1/2 inches high. The lower drawers shall consist of one drawer approximately 9 inches wide, 1 1/2 inches high; one drawer approximately 5 1/2 inches wide, 1 1/2 inches high; one drawer 5 1/2 inches wide, 6 inches high. All lower drawers to be approximately 12 inches deep. The four upper drawers and the one lower drawer (5 1/2 inches wide, 1 1/2 inches high) shall be furnished with 4 dividers for each drawer and be adjustable on 1 1/2 inch centers.

3.3 Style C Style C shall be similar to figure 4, with three full width drawers 21 inches wide, 17 inches deep, 3 3/4 inches high. The cabinet will have a lower compartment 21 inches wide, 17 3/4 inches deep, 12 inches high, with a self storing panel cover. The panel cover shall have a means provided so that the panel remains in a closed position after it is unlocked unless intentionally opened. The cabinet shall be furnished with two 4 inch minimum diameter lock-type swivel casters on the bottom front side of the cabinet and two wheels on the bottom rear of the cabinet.

3.4 Regulatory requirements The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractor Certification "The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of the Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract."

4.2 Responsibility for testing and inspection The contractor is responsible for the performance of all testing and inspection in accordance with this Commercial Item Description. Except as otherwise specified, the contractor may utilize his own or any other facilities suitable for the performance of the testing and inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the testing and inspection set forth in this Commercial Item Description where such testing and inspection is deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2.1 Responsibility for insuring testing and inspection The supplier is responsible for insuring that the product offered meets the requirements and is in accordance with this Commercial Item Description.

4.3 Sampling procedures Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as follows:

Category-	Testing
Sample unit-	1 ea.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

Inspection level-	S-2
Acceptable quality level(AQL)-	4.0
AQL expressed in terms of-	Defects per 100 units
Reference-	4.4 through 4.4.2

4.4 Testing Each sample shall be tested in accordance with 4.4.1 through 4.4.2.

4.4.1 Load test Load test shall consist of two parts to test the load supporting ability of the drawers and compartments. The first part shall consist of applying a ten pound force to the corner of each different size, full width drawers. The load shall be concentrated each time within an area not more than six inches from the front corner of the drawer when the drawer is in a fully opened position. If after the force has been applied and then removed, and there is no sagging of the drawer or twisting to the slides to cause the drawer to bind, part two shall consist of loading all drawers and compartments for preparation for the roll test in 4.4.2 with tools or other weights at the rate of 0.13 pounds per square inch of utile surface area for the full width drawers, and at a rate of 0.07 pounds per square inch of utile surface area for split drawers or other than full width drawers.

4.4.2 Roll Test After successful completion of the load test, the cabinet shall be subjected to a roll test to further test integrity of construction under mobile conditions. The cabinet (loaded as in 4.4.1) shall be pushed or pulled steadily over a series of boards measuring not less than 1/2 inch thick by 3 inches wide. The boards shall be secured (with the 3 inch dimension down) to a sheet of plywood so that two rows consisting of three boards in each row are formed. The boards shall be positioned parallel along their length dimension and spaced 3 inches apart. The boards in one row shall be staggered with the boards in the second row so that when the wheel on one side of the tool cabinet is dropping off the first board, the wheel on the other side of the tool cabinet is rolling onto the first board of the second row, causing a vibrating, and uneven twisting affect on the tool cabinet. After the cabinet has rolled over all six boards in both the forward and backward direction for at least 20 times forward and 20 times backward, the tool cabinet shall be inspeoted for integrity of construction. Any defect affecting appearance or serviceability shall be cause for rejection of the sample unit.

5. PACKAGING

5.1 Preservation, packaging, packing, labeling, and marking The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or purchase order.

6. NOTES:

6.1 Acquisition requirements Acquisition requirements must specify the following:

a. Title, number, and date of this document.
b. Style of mobile tool cabinet
c. Preservation, packaging, packing, labeling, and

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:26Z
Check the source to verify that this is the current version before use.

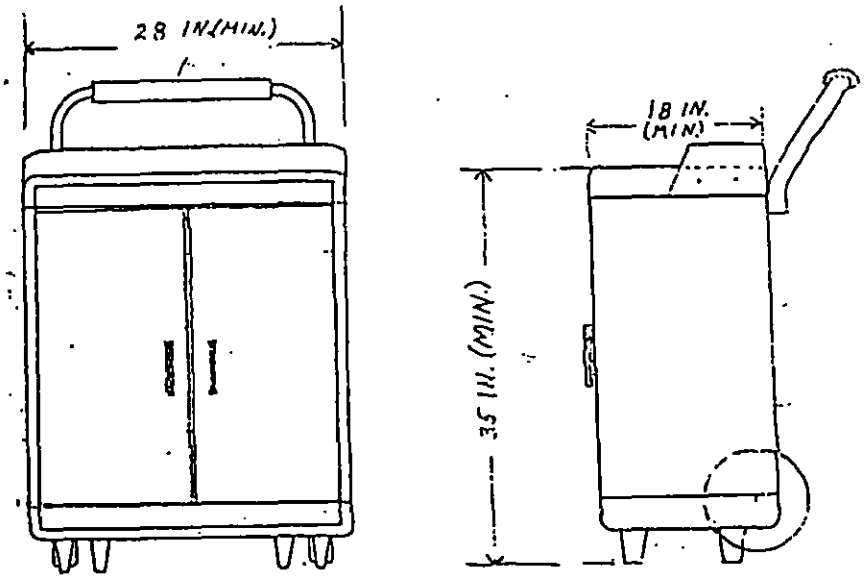


Figure 1. Type I, style A and style B tool cabinets.

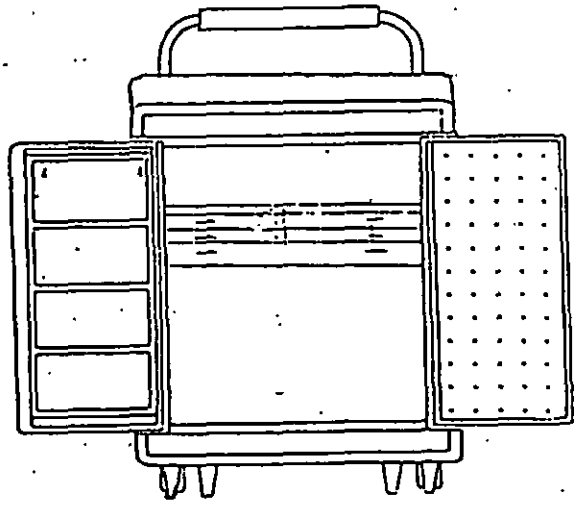


Figure 2. Type I, style A tool cabinet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

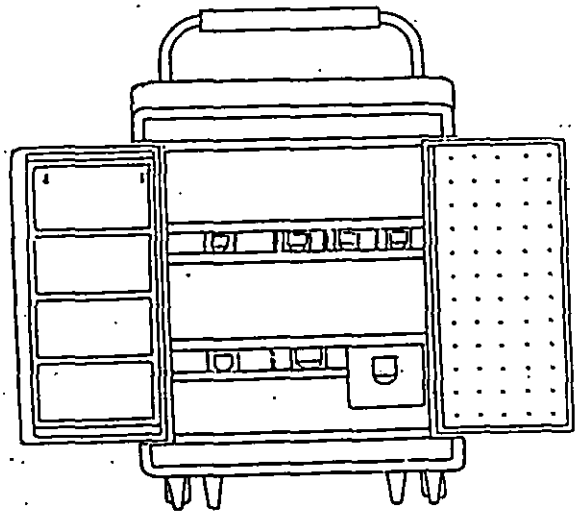


Figure 3. Type I, style B Tool Cabinet.

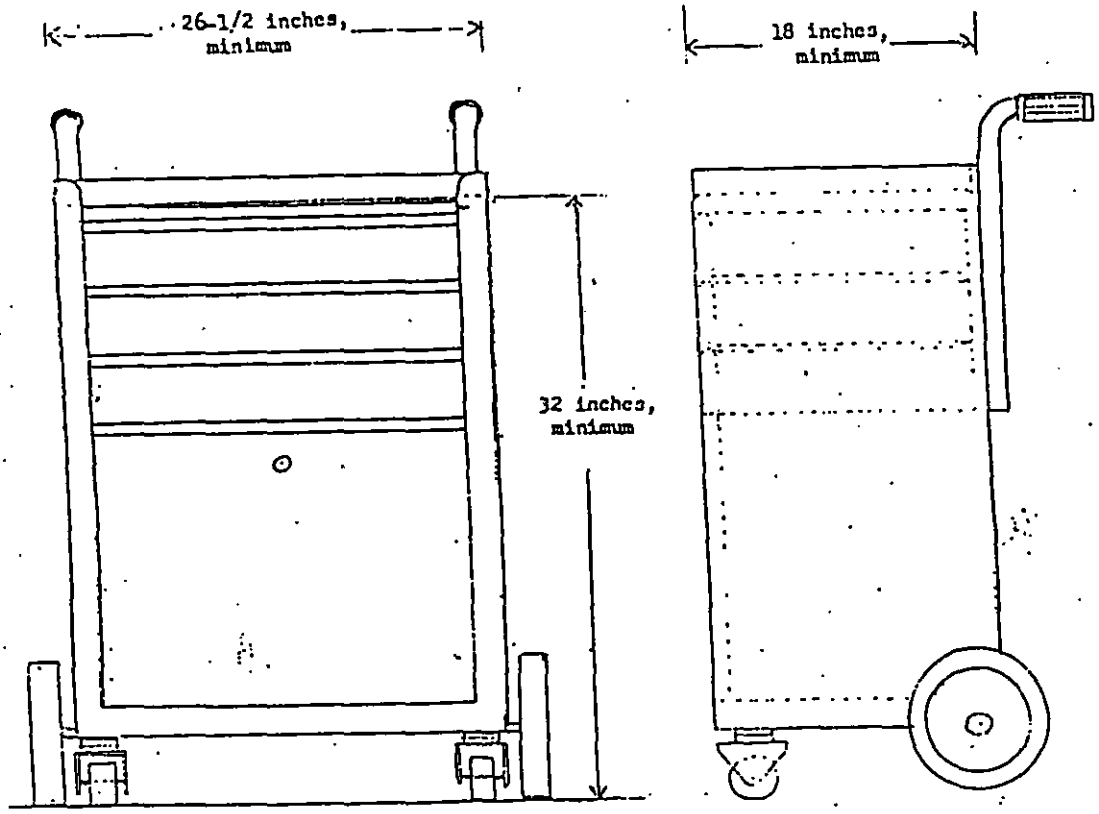


Figure 4. Type I, style C tool cabinet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

marking required.

MILITARY INTEREST

Custodians

Army - GL

Preparing activities

GSA/FSS

Review activities

Navy - SH
Air Force - 99

User activities

Navy - MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.