MILITARY SPECIFICATION

CHAFF PACKAGE (TYPE RR-( )/AL) GENERAL SPECIFICATION FOR

This specification is approved for use by the Naval Air Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the design, performance, and acceptance requirements for the Chaff Package (Type RR-( )/AL). The chaff (radar reflector) package contains components capable of creating confusing returns to radar systems operating within specified frequency ranges.

2. APPLICABLE DOCUMENTS.

2.1 Government documents.

2.1.1 Specification, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Engineering Center, Engineering Specifications and Standards Department (ESSD) Code 93, Lakehurst, NJ 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Federal

PPP-T-45	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing
PPP-T-76	Tape, Packaging, Paper (for carton sealing)
UU-T-91	Tape, Pressure-Sensitive Adhesive, Double-Coated
PPP-T-97	Tape, Pressure-Sensitive Adhesive, Filament Reinforced
UU-P-268	Paper, Kraft, Wrapping
PPP-B-621	Box, Wood, Nailed and Lock-Corner
PPP-B-636	Box, Shipping, Fiberboard

Military

MIL-P-116	Preservation-Packaging, Methods of
MIL-B-131	Barrier Materials, Water Vaporproof, Flexible, Heat-Sealable
DoD-D-1000	Drawing, Engineering and Associated List
MIL-T-18303	Test Procedures; Preproduction, Acceptance and Life for Aircraft Electronic Equipment, Format for
MIL-I-43553	Ink, Marking, Epoxy Base
MIL-C-85002/1	Chaff Package (Type RR-153A/AL), Specification Sheet
MIL-C-85002/2	Chaff Package (Type RR-152A/AL), Specification Sheet
MIL-C-85002/3	Chaff Package (Type RR-173/AL), Specification Sheet
MIL-C-85002/4	Chaff Package (Type RR-177/AL), Specification Sheet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-STD-102	Preservation, Packaging and Packing Level

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
DoD-STD-480	Configuration Control-Engineering Changes, Deviations and Waivers
MIL-STD-794	Parts and Equipment, Procedures for Packaging and Packing of
MIL-STD-810	Environmental Test Methods
MIL-STD-831	Test Reports, Preparation of
MIL-STD-2071	Testing of Chaff Radar Cross-section

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and other publications form a part of this specification to the extent specified herein.

DRAWINGS

Naval Air Systems Command

DL 1050AS102	Chaff Package Assembly
DL 1050AS110	Chaff Package, RR-( )/AL; Marking, Preservation, and Packaging of
DL 1050AS123	Vibration Fixture, Taped Chaff Package

PUBLICATIONS

Bureau of Naval Weapons

WR-43	Preparation of Quality Assurance Provisions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

Air Force

MANUAL TO 12P3-2ALE2-2	Handbook, Service Instructions, Dispensing Set, Countermeasures Chaff, AN/ALE-2

(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

STANDARDS

American Society of Mechnical Engineers

ANSI Y14.5	Dimensioning and Tolerancing for Engineering Drawings

(Application for copies should be addressed to the American Society of Mechanical Engineers, United Engineering Center, 345 East 47th Street, New York, N.Y. 10017)

American Society for Testing Materials

ASTM D 689-79	Standard Method of Test for Internal Tearing Resistance of Paper
ASTM D 774-67	Standard Method of Test for Bursting Strength of Paper

(Application for copies should be addressed to the American Society for Testing Materials, 1916 Race Street, Philadelphia, PA.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS.

3.1 Specification sheets. The individual item requirements shall be as specified herein and in accordance with the applicable specification sheets. In the event of any conflict between requirements of this specification and the specification sheets, the latter shall govern.

3.2 First article. When specified in the contract, a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.3 Chaff material. The chaff material shall be in accordance with the applicable specification sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

3.3.1 Dipoles. Dipoles shall meet the dimension and composition requirements of the applicable specification sheets. Dipoles composed of coated filaments shall have dc resistivity of less than 10 ohms per linear inch.

3.3.2 Coating. When required by the applicable specification sheet, a slip coating shall be applied to the chaff material to:

a. prevent dipole end welding and metal smear during the cutting operation

b. prevent cohesion between dipoles which may be caused by corrosive conditions.

c. increase dispersion by reducing dipole-to-dipole friction.

The formulation of the slip coating shall be approved by the procuring activity prior to use as part of the first article inspection procedure or quality conformance test procedure if first article is not required (see 6.2.2).

3.4 Design and construction. Each chaff package, (see 6.4.4) including chaff and all parts, assemblies, packing, and packaging; shall conform to all the requirements of this specification and applicable specification sheet for design, construction, and workmanship, except as otherwise specified in the contract (see 6.2.1). Configuration control shall be maintained in accordance with DoD-STD-480.

3.4.1 Nomenclature and identification marking. Nomenclature and identification marking shall be in accordance with MIL-STD-129, MIL-STD-130, and as specified herein.

3.4.2 Item definition. The chaff countermeasures packages covered by this specification shall consist of beaming Kraft or tagboard outer sleeves loaded with chaff (reflective) components and necessary non-chaff components as specified in the applicable specification sheet.

3.4.3 Physical characteristics. The chaff packages shall be functionally compatible with the AN/ALE-1 and AN/ALE-2 dispensers. Neither the operational reliability of either dispenser nor the effectiveness of the chaff shall be degraded when these packages are used with the chaff dispensers.

3.5 Standard conditions. The following conditions shall be used to establish normal performance characteristics under standard conditions.

a.	Temperature	Room ambient (25° ± 10°C)
b.	Altitude	Normal Ground
c.	Vibration	None
d.	Humidity	Room ambient up to 90 percent relative humidity

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

3.6 Service conditions. The chaff package shall operate as required under any of the environmental service conditions or combinations of these conditions specified in MIL-STD-810 as modified herein. Tolerances shall be in accordance with the general requirements of MIL-STD-810.

3.7 Performance requirements. Unless otherwise specified herein, values set forth to establish the specified performance apply to performance under both standard and extreme service conditions. When reduced performance under extreme conditions is acceptable, tolerances or values setting forth acceptable variations from the performance under standard conditions will be specified herein.

3.7.1 Performance characteristics. Performance characteristics shall be in accordance with MIL-STD-2071 and the applicable specification sheet, when the chaff package is tested in accordance with the requirements specified therein.

3.8 Detail requirements. The chaff package contents and taped chaff package (see 6.4.13) shall meet the design, construction, and physical requirements contained herein. Drawings shall be interpreted in accordance with DoD-D-1000 and ANSI Y-14.5.

3.8.1 Components. Components shall consist of dipoles, packing materials, vibration protectors, and other components; and shall be of the material, dimensions, quality, and quantity specified in the applicable specification sheet.

3.8.2 Chaff package. A chaff package shall consist of an outer sleeve (see 6.4.11) containing components as specified in 3.8.1.

3.8.2.1 Outer sleeve. The outer sleeve shall be constructed in accordance with DL 1050AS102 and this specification. The color of the outer sleeve shall be tan or natural.

3.8.2.1.1 Outer sleeve material strength.

3.8.2.1.1.1 Tear strength. The tear strength of the outer sleeve shall be at least 424 grams against the grain and at least 192 grams with the grain at standard atmospheric conditions, determined in accordance with ASTM D689-62.

3.8.2.1.1.2 Burst strength. The burst strength of the outer sleeve shall be at least 91 pounds per square inch at standard atmospheric conditions, determined in accordance with ASTM D774-67.

3.8.2.1.1.3 Tab strength. The outer sleeve material and perforations shall be such that from a sample of three sleeves filled and taped, the six tabs (two on each sleeve) (see 6.4.12) shall hold when a weight of not less than 5 pounds is applied for 1 minute to one tape, and shall tear within 1 minute when a weight not greater than 15 pounds is applied to the tape. The average hold strength for all six tabs shall be not less than 6 pounds and the average tear weight for the six tabs shall be not greater than 12 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

3.8.2.2 Weight. The minimum gross weight, if required, of a chaff package, shall be as specified in the applicable specification sheet.

3.8.3 Carrier tapes (see 6.4.1). Equal lengths of each of the following two types of tapes are required for mounting chaff packages on tapes.

3.8.3.1 First tape. The first tape shall be a reinforced pressure-sensitive tape conforming to PPP-T-97, Type II, class A or B; and DL 1050AS102. The tape shall be 1-3/16 ± 1/16 inches wide. No splices shall be permitted in the reinforcing fibers of this tape throughout a length of the tape within a carton of packages. Splices in the paper laminate are permissible.

3.8.3.2 Second tape. The second tape shall be a pressure-sensitive Kraft paper tape conforming to PPP-T-76 and DL 1050AS102. The width of the second tape shall be 1-3/16 ± 1/16 inches. The second tape shall be free of edge tears and other imperfections. Adhesives shall be applied to one side only and shall conform to the adhesive requirements specified in 3.8.3.3. Splicing of the second tape is permissible; spliced ends shall be cut square.

3.8.3.3 Adhesives. The tape adhesives shall have, after any applicable setting time, sufficient strength such that the package material shall tear or delaminate, or the tape shall break, before the adhesive fails when tested by abruptly pulling the tape away from the package material at an angle perpendicular to the plane of the material. The thickness of the material (both tapes and adhesive) between packages shall be not greater than 0.026 inches. The adhesive shall be unaffected in strength by exposure to the environmental conditions specified herein. Any tendency of the adhesive to penetrate through the tape shall be held to the minimum consistent with obtaining positive adhesion. In addition, the adhesive shall allow for a sufficiently flexible bond of the two tapes between the chaff packages such that when wrapped around a 1/2 inch diameter rod, with the second paper tape against the rod, the tapes shall not tear or delaminate and the adhesive shall not separate. The bond flexibility requirement shall not be adversely affected by any manufacturing process or environmental condition specified herein.

3.8.4 Assembly.

3.8.4.1 Chaff package. The chaff package shall be assembled in accordance with the applicable specification sheet, and as specified herein.

3.8.4.2 Attaching chaff package to tapes. The chaff packages shall be attached to the tapes by sandwiching the package tabs between the first and second tapes as specified in DL 1050AS102. The second tape shall be used to cover all exposed adhesive of the first tape. The first and second tapes shall adhere to each other over their areas of contact, and the tape shall delaminate before the adhesive fails. Not more than 1/16 inch of the first tape shall protrude beyond the edge of the second tape. The first tape shall always be the one nearer the reflector package. The distance between the longitudinal centerlines of the first and last packages shall not differ by more than 1 inch when measured along each tape. The leading edges of all packages shall be oriented on the tapes in accordance with DL 1050AS102. Packages may be omitted at intervals along the tapes only for the purpose of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

facilitating stacking in the cartons and containers. The center-to-center spacing of the tapes shall be in accordance with DL 1050AS102, regardless of the taping method used.

3.8.4.3 Tape leaders and tails. The tape leaders and tails shall be in accordance with DL 1050AS102.

3.8.4.3.1 Marking of tapes. Each tape leader and tail shall be permanently marked in waterproof, petroleum resistant ink conforming to MIL-I-43553, in accordance with MIL-STD-130 and DL 1050AS102 and the applicable specification sheet.

3.8.4.4 Metallic snap fasteners. Metallic snap fasteners shall be used to splice the tail end of carrier tapes of one carton to the lead end of tapes of another carton. The fasteners shall be as specified in DL 1050AS102.

3.8.5 Taped chaff packages. Loose tabs or damaged packages shall be attached or replaced on the tape as shown in DL 1050AS102 utilizing a 1-by 2-inch doublefaced adhesive pressure-sensitive tape conforming to UU-T-91, Type II. Loose tabs or tabs of replaced packages shall be of such quality that the unit tabs shall tear along their perforations and not pull out from the tape when subjected to a normal stripping operation of the AN/ALE-2 type of dispensing machine, after subjection to the service conditions specified herein. When the adjustment of the taping machine or the quality of the assembly operation of attaching the packages to the first and second tapes is such that more than six retapes are performed in this manner on each tape within a carton of packages, or if more than three adjacent packages, same tape, or four adjacent packages, either tape, must be retaped in this manner, the entire carton of material is not acceptable. The total thickness of all layers (the first tape, second tape, tab, and splices) shall be not greater than 0.060 inch.

3.8.6 Splicing tape. Each inner carton shall contain four strips of splicing tape in accordance with DL 1050AS110. The adhesive face shall be protected by a sheet of full hard aluminum at least 0.002 inch thick and shall be fabricated in accordance with DL 1050AS110 and stapled to the inside of one end flap of the carton with a single staple applied from the inside of the flap. Care should be taken to prevent the staple from puncturing the adhesive tapes. The splicing tapes will be used by Fleet personnel for repair of damaged carrier tapes on taped chaff package assemblies.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. The Government will conduct all flight tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4.1.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First Article Inspections (see 4.2)

b. Initial Production Inspection (see 4.3)

c. Quality Conformance Inspections (see 4.4)

4.1.2 Classification of characteristics. The characteristics verified by the tests and examinations described herein are classified as major or minor in accordance with WR-43. Tests and examinations that verify major characteristics are identified by the symbol (M). Tests and examinations described which are not annotated with a classification code are classified minor.

4.1.3 Lot formation. A lot shall consist of a group of items of a specific configuration; produced within the same time frame at one location; by the same production line and production technique; and submitted for acceptance, inspection, or use at one time.

4.2 First article inspection. First article inspection shall be conducted by the contractor on chaff packages representative of the production units to be supplied under the contract. These chaff packages shall be inspected according to the approved first article inspection procedure (see 4.5). The Government inspector and the procuring activity shall be advised when inspections are to be conducted so that a representative may be designated to witness or supervise the inspections when so desired. Contractors not having adequate facilities to conduct all required inspections shall obtain the services of a commercial testing laboratory acceptable to the Government. No first article inspections shall be conducted prior to approval of the first article test procedures by the procuring activity. First article samples shall not be submitted for functional (Government) tests until in-house tests have been conducted in accordance with the approved test procedures, and the test results have been approved by the procuring activity.

4.2.1 First article inspection data. The contractor shall prepare and make available a first article inspection report in accordance with MIL-STD-831 and the contract which includes all data collected during first article inspections (see 6.2.2).

4.2.2 Scope of inspections. At least 192 chaff packages (3 taped package assemblies) (see 6.4.14) shall be selected for first article inspection to verify that the chaff packages meet all the requirements of this specification, the specification sheet, and the contract (see table I). The test on each assembly shall be ran in the order shown in table I. The assembly numbers (1,2, or 3) shall be clearly marked on each package before first article start. The 20 each packages used for the vibration and shock tests shall be clearly marked (identified) and grouped together before being spliced to the end of first article group 3 prior to functional testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspections - schedule and sequence.

Inspection	Requirement Paragraph	Inspection Paragraph	Taped Package Assembly		
			1	2	3
Chaff Material	3.2, 3.3	4.6	X	X	X
Chaff Package	3.8.2	4.7	X	X	X
Chaff Package Assembly	3.8.4	4.8	X	X	X
High Temperature	3.6	4.10.1		X	
Low Temperature	3.6	4.10.2		X	
Temperature Shock	3.6	4.10.3		X	
Humidity	3.6	4.10.4		X	
1/Shock	3.6	4.10.5			X
1/Vibration	3.6	4.10.6			X
Functional	3.7.1	4.12	X	X	X

1/Two taped assemblies of 20 packages each shall be subjected to these tests. Spaces shall be provided on the taped assembly to provide compatibility with the vibration/shock fixture as detailed in 4.10.6.3.

4.2.3 First article approval. Approval of the first article sample shall be by the procuring activity upon satisfactory completion of all inspections. No production chaff packages shall be delivered prior to the approval of the first article sample.

4.2.4 Production chaff packages. Chaff packages and taped package assemblies supplied under the contract shall in all respects; including design, construction, workmanship, performance, and quality be equal to the approved first article sample. Each chaff package and assembly shall be capable of successfully passing the same tests as imposed on the first article sample. Evidence of noncompliance with the above shall constitute cause for rejection, and it shall be the obligation of the contractor to make necessary corrections as approved by the procuring activity.

4.3 Initial production inspections. One of the first 50 production taped package assemblies shall be selected and sent at the contractor's expense to a designated Government laboratory for inspections. This sample shall be selected by the Government representative after it has successfully passed all individual inspections. No other inspections shall be conducted on the sample prior to starting the initial production inspections. The first article sample shall not be selected for this inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4.3.1 Scope of inspections. The sample may be subjected to any and all inspections the procuring activity deems necessary to assure that the production equipment is equal to the previously approved sample in design, construction, workmanship, performance, and quality; and that it meets all requirements specified herein or in the contract.

4.3.2 Accessory material. In addition to the complete sample submitted for initial production inspections, the contractor shall also submit such accessory material and include data necessary to evaluate the sample in accordance with this specification and the contract.

4.3.3 Initial production sample approval. Approval of the initial production sample shall be by the procuring activity upon satisfactory completion of all inspections. Any design, material, or performance defect made evident during this inspection shall be corrected by the contractor to the satisfaction of the procuring activity. Failure of the initial production sample to pass any of the inspections shall be cause for deliveries under the contract to cease until proper corrective action is approved and accomplished.

4.4 Quality Conformance Inspections. The contractor shall furnish all samples and, with the exception of Government performed flight tests, shall be responsible for accomplishing the quality conformance inspections. All examinations and tests shall be under the supervision of the Government representative. Contractors not having adequate facililties for conducting all required inspections shall engage the services of a commerical testing laboratory acceptable to the procuring activity. The contractor shall make available inspection reports showing quantitative results for all applicable quality conformance inspections (see 6.2.2). Such reports shall be signed by an authorized representative of the contractor or laboratory, as applicable. Acceptance or approval of material during the course of manufacture shall not be construed as a guarantee of the acceptance of the finished product. Quality conformance inspections shall consist of the following:

a. Individual Inspections (see 4.4.1)

b. Sampling Inspections (see 4.4.2)

c. Special Inspections (see 4.4.3)

4.4.1 Individual inspections. Individual inspections are those inspections conducted on each taped package assembly. Individual inspections are specified in table II. Failure to pass any of these inspections shall be cause for rejection of the chaff package assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

TABLE II. Individual inspections.

Inspection	Requirement Paragraph	Inspection Paragraph
Chaff Package Alignment	3.8.4.2	4.9.1
Chaff Package Repairs	3.8.5	4.9.2
Marking of Tapes	3.8.4.3.1	4.9.3
Packaging and Packing	5.2, 5.3	4.9.4

4.4.2 Sampling inspections. Chaff package assemblies selected for sampling inspections shall first have passed the individual inspections. Chaff package assemblies shall be selected for sampling inspections by the Government representative in accordance with the schedule contained herein.

4.4.2.1 Scope of inspections. Sampling inspections shall include examinations and tests for verification of manufacturing and performance requirements.

4.4.2.1.1 Sampling inspection for verification of manufacturing processes. Sampling inspections for verification of the manufacturing processes shall include, as a minimum, those in-process inspections specified in 4.6, 4.7, and 4.8.

4.4.2.1.2 Sampling inspections for verification of performance requirements. Sampling inspections for verification of performance requirements (Government performed flight tests) shall be conducted on chaff package assemblies to demonstrate conformance to the requirements of the applicable specification sheet when conducted in accordance with the procedures of MIL-STD-2071. Sampling shall be performed to provide one carton (64 packages) from each production lot for inspection.

4.4.3 Special inspections. Special inspections shall be conducted on a quantity of chaff packages for the purpose of checking the effect of any design or material change on performance, and to assure adequate quality control. The chaff packages selected for special inspections may be selected from those previously subjected to sampling inspections.

4.4.3.1 Special inspection schedule. Selection of chaff packages or assemblies for special inspections shall be made as follows:

a. On early chaff packages after an engineering or major change.

b. Whenever failure reports or other information indicate that additional inspections are required. (This will be determined by the procuring activity.)

4.4.3.2 Scope of inspections. Special inspections shall consist of such examinations and tests as required by the procuring activity (see 6.2.2). Inspection procedures previously approved for the first article inspection shall be used where applicable. When not applicable, the contractor shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

prepare an inspection procedure and make it available to the procuring activity prior to conducting the inspections (see 6.2.2).

4.4.4 Chaff package failure. Should a failure occur during either the sampling or special inspections, the following action shall be taken:

a. Determine the cause of failure.

b. Determine if the failure is an isolated case or design defect.

c. Prepare and make available for procuring activity approval, the proposed corrective action intended to reduce the possibility of the same failure(s) occurring in future inspections (see 6.2.2.).

d. Where practical, include an inspection in the individual inspections to check all equipment for this requirement until reasonable assurance is obtained that the defect has been satisfactorily corrected.

4.5 Inspection procedures. The procedures used for conducting first article inspection and quality conformance inspection shall be prepared by the contractor and made available to the procuring activity (see 6.2.2). The right is reserved by the procuring activity or the Government inspector to modify the inspections or require any additional inspections deemed necessary to determine compliance with the requirements of this specification and the contract (see 6.2.1). MIL-T-18303 shall be used as a guide for preparation of inspection procedures. When approved inspection procedures are available from previous contracts, such procedures may be used provided their use is accepted to the procuring activity; however, the right is reserved by the procuring activity to require modification of such procedures, including additional inspections, when deemed necessary (see 6.2.1).

4.6 Inspection of materials.

4.6.1 Chaff material inspection. Examinations of the materials receiving inspection report for each receiving inspection lot, and on-line inspection of chaff-hank (see 6.4.7) and chaff-cut (see 6.4.6) lots as defined herein shall be made to adequately demonstrate compliance with the requirements of this specification and the applicable specification sheet.

4.6.1.1 Chaff-hank inspections.

4.6.1.1.1 Dipole characteristics inspection. Fifty fibers or strands from each chaff-hank lot shall be inspected for the weight, dimension, and coating requirements of this specification and the applicable specification sheet. If more than 15 fibers or strands do not meet the specified requirements, the lot shall be rejected, and production stopped until corrective action has been taken. One chaff hank (see 6.4.3) from each chaff hank lot may be weighted, as a unit, in lieu of 50 fibers to verify the in-process weight requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4.6.1.1.2 Secondary coating (M101). The formulation of the secondary coating shall be verified by means of appropriate chemical analysis. Two sample hanks (1 pound minimum) shall be randomly selected from each chaff-hank lot for this inspection. Samples failing to meet the approved coating formulation shall be cause for rejection of the chaff-hank lot.

4.6.1.2 Chaff-cut inspection.

4.6.1.2.1 Dipole length inspection (M102). Twenty dipoles from each chaff cut (see 6.4.2) shall be selected at random from each chaff-cut lot (specified herein). Each of these dipoles shall be measured, and its length recorded. If more than four dipoles from any cut, or more than 15 percent of the total sample are found to be out of the specified tolerance, that lot of chaff-cuts shall be rejected, and production stopped until corrective action has been taken. The inspection shall be repeated on the first chaff cuts processed after the corrective action has been taken to assure compliance with specification requirements.

4.7 Chaff package inspections.

4.7.1 Dipole layout. Verification of compliance with the requirements of the applicable specification sheet and as contained herein shall be made during initial fabrication of the chaff package lot (see 6.4.8).

4.7.2 Outer sleeve inspections. Outer sleeve inspections shall be conducted on samples from each receiving inspection lot (see 6.4.10). Sampling shall be performed in accordance with MIL-STD-105, level S-1, AQL 6.5 normal inspection.

4.7.2.1 Visual inspection. A visual inspection shall be conducted on each outer sleeve to assure compliance with DL 1050AS102, and this specification.

4.7.2.2 Dimensional inspection. A sample of outer sleeves shall be inspected to assure dimensional conformance with DL 1050AS102.

4.7.2.3 Strength tests.

4.7.2.3.1 Tear strength. A test in accordance with ASTM D689-62 shall be conducted by receiving inspection on a sample of outer sleeves. Tear strength shall be at least 424 grams against the grain and at least 192 grams with the grain at standard conditions.

4.7.2.3.2 Burst strength. A test in accordance with ASTM D774-67 shall be conducted by receiving inspection on a sample of outer sleeves. Burst strength shall be at least 91 psi at standard conditions.

4.7.2.3.3 Tab strength. Packages shall be selected at random from each lot and tested as specified in 3.8.2.1.1.3.

4.7.3 Weight (M103). The chaff package weight examination, if applicable, shall confirm compliance with 3.8.2.2. All of the first article and initial production units shall be weighed and the weights recorded. Ten

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

sample packages from each 1920 production packages (30 taped assemblies), as they are produced, shall be selected at random, weighed and the weights recorded.

4.7.4 Carrier tapes.

4.7.4.1 First tape. Examination of the tape and receiving inspection reports shall be performed to assure compliance with this specification.

4.7.4.2 Second tape. Examination of the tape and receiving inspection reports shall be performed to assure compliance with this specification.

4.7.4.3 Adhesives. A sample of the adhesive shall be tested to assure compliance with this specification. Adhesive qualities shall be tested before and after environmental exposures.

4.8 Taped package assembly inspections. Chaff package assembly inspections shall be conducted on one chaff package assembly selected at random from each production lot.

4.8.1 Taped chaff packages. Inspections and measurements shall be performed to insure conformance of the assembly with DL 1050AS102 and this specification.

4.8.2 Tape leaders and tails. Examination of the tape leaders and tails shall be conducted to insure compliance with DL 1050AS102 and this specification.

4.8.3 Metallic snap fasteners. Examination of the metallic snap fasteners shall be conducted to verify compliance with DL 1050AS102.

4.8.4 Splicing tape. Inspection of the splicing tape shall be performed to assure compliance with 3.8.6.

4.9 Individual inspections.

4.9.1 Chaff package alignment. Visual examination of the taped package assembly shall be made to confirm compliance with 3.8.4.2.

4.9.2 Chaff package repairs. Visual examination of chaff packages on the taped package assembly shall be made to confirm compliance with 3.8.5.

4.9.3 Marking of tapes. Visual inspection of the carrier tapes shall be made to confirm compliance with 3.8.4.3.1.

4.9.4 Packaging and packing. Visual examinations shall be made of the packaging, packing, and markings to assure compliance with Section 5 of this specification. Any discrepancies from the specification shall be cause for rejection.

4.10 Environmental tests. The simulated environmental tests specified below shall be performed in the order presented herein. Tolerances for these tests shall be in accordance with MIL-STD-810 unless otherwise specified herein. The chaff packages and assemblies shall not show signs of appreciable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

damage or degradation and shall meet all dimensional and performance requirements after exposure.

4.10.1 High temperature. The chaff package assembly shall be subjected to a high temperature test in accordance with MIL-STD-810, Method 501.1, Procedure II, including Method 501.1 paragraph entitled, Summary; with the following exception: the maximum temperature shall be 65°C (150° Fahrenheit).

4.10.2 Low temperature. The chaff package assembly shall be subjected to a low temperature test in accordance with MIL-STD-810, Method 502.1, Procedure I, including Method 502.1 paragraph entitled, Summary; with the following exception: the minimum temperature shall be -59°C (-65° Fahrenheit).

4.10.3 Temperature shock. The chaff package assembly shall be subjected to a temperature shock test in accordance with MIL-STD-810, Method 503.1, Procedure I, including Method 503.1 paragraph entitled, Summary.

4.10.4 Humidity. The chaff package assembly shall be subjected to a humidity test in accordance with MIL-STD-810, Method 507.1, Procedure I, including Method 507.1 paragraph entitled, Summary.

4.10.5 Shock. The chaff package assembly shall be subjected to a shock test in accordance with MIL-STD-810, Method 516.2, Procedure I, including Method 516.2 paragraph entitled, Summary.

4.10.5.1 Shock pulse. The pulse shape shall be as specified in figure 516.2-1 of MIL-STD-810 except that an electrodynamic vibration machine may be used, and if so, the tolerances of the specified pulse may be modified to allow amplitude variation up to ±20 percent of maximum amplitude prior to the initiation of the sawtooth ramp. All other tolerances apply. (The change in tolerance allows for the normal necessary pre- and post-pulses for electrodynamic machine shock.)

4.10.5.2 Shock fixture. The shock fixture shall conform to DL 1050AS123. The control accelerometer location for each axis shall be as specified in DL 1050AS123.

4.10.6 Vibration. The chaff package assembly shall be subjected to a vibration test in accordance with MIL-STD-810, Method 514.2, Procedure IIA, including Method 514.2 paragraph entitled, Summary; except as follows:

a. The chaff package assembly must withstand both a Low Level Adequacy Test and a Critical Design Test.

b. Testing shall be performed in all three axes.

c. The same fixture used for the shock test shall be used for the vibration test.

d. The fixture shall be oriented in the flight-up position.

e. The control accelerometer location for each axis shall be as specified in DL 1050AS123.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4.10.6.1 Vibration test sequence.

a. Low Level Adequacy Vibration in accordance with figure 1 for 15 minutes in each axis.

b. Critical Design Vibration in accordance with figure 2 for 10 minutes in each axis. (If the vibration machine cannot attain the required levels, the modified critical design vibration test contained in 4.10.6.2 may be performed upon approval by the procuring activity.)

c. Repeat step a.

4.10.6.2 Modified critical design vibration test. To perform the modified critical design vibration test, first vibrate the test packages at the highest possible level for five minutes using the same spectrum shape and frequency range as specified. The overall level shall in no case be reduced more than 6 dB below that required in the critical design vibration test. Second, divide the frequency spectrum into not more than three bands as follows: The first band should be from 20 Hz to the highest frequency at which the vibration system will vibrate the test packages at the required g^2/Hz level, but in no case shall be less than 500 Hz. The second band shall be from the highest frequency of the first band to the highest frequency at which the vibration system will vibrate the test packages at the required g^2/Hz level. If possible, the second band shall extend to 2000 Hz so that a third band is not required. However, if required, the third band shall cover the remainder of the frequency spectrum up to 2000 Hz. The test packages shall be vibrated in each frequency band and each axis for five minutes. The chaff packages shall be carefully inspected after each phase of the modified test procedure.

4.10.6.3 Preparing the taped chaff packages for vibration and shock. The taped package assembly shall be placed in the fixture in five layers, each layer containing four packages. The top layer shall have the packages uppermost on the carrier tapes. Spaces shall be provided along the carrier tapes to permit stacking of the packages in the fixture. After placing the packages in the fixture, the aluminum grid shall be placed on and bolted to the top sides of the fixture. It may be necessary to place spacers between the top of the fixture and the grid so that the chaff packages are not compressed to the point of tearing or excessive flattening.

4.11 Functional tests. All functional (flight) tests will be conducted by the Government in accordance with MIL-STD-2071 and the applicable specification sheet.

4.11.1 Flight tests. The Government performed flight tests will be conducted on first article, initial production, quality conformance, and special test units to verify performance capability. Tests will include Radar Cross-Section (RCS) measurements and chaff-dispenser compatibility tests, in accordance with MIL-STD-2071 and as modified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

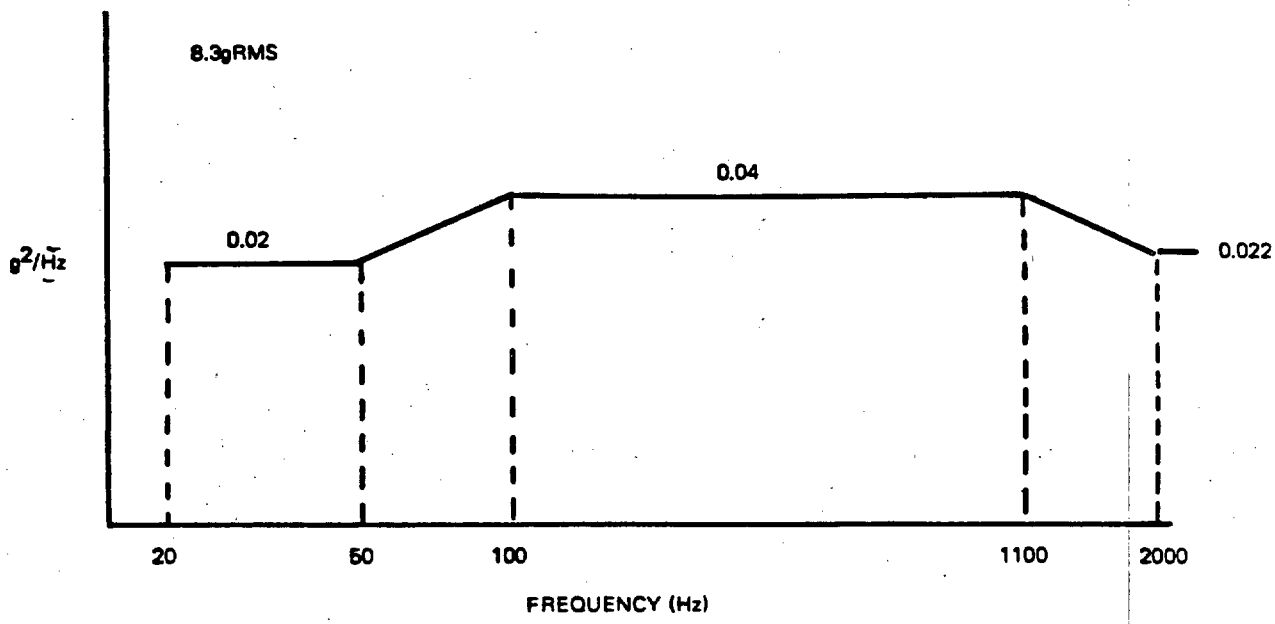


Figure 1. Low level adequacy vibration spectrum for taped chaff package.

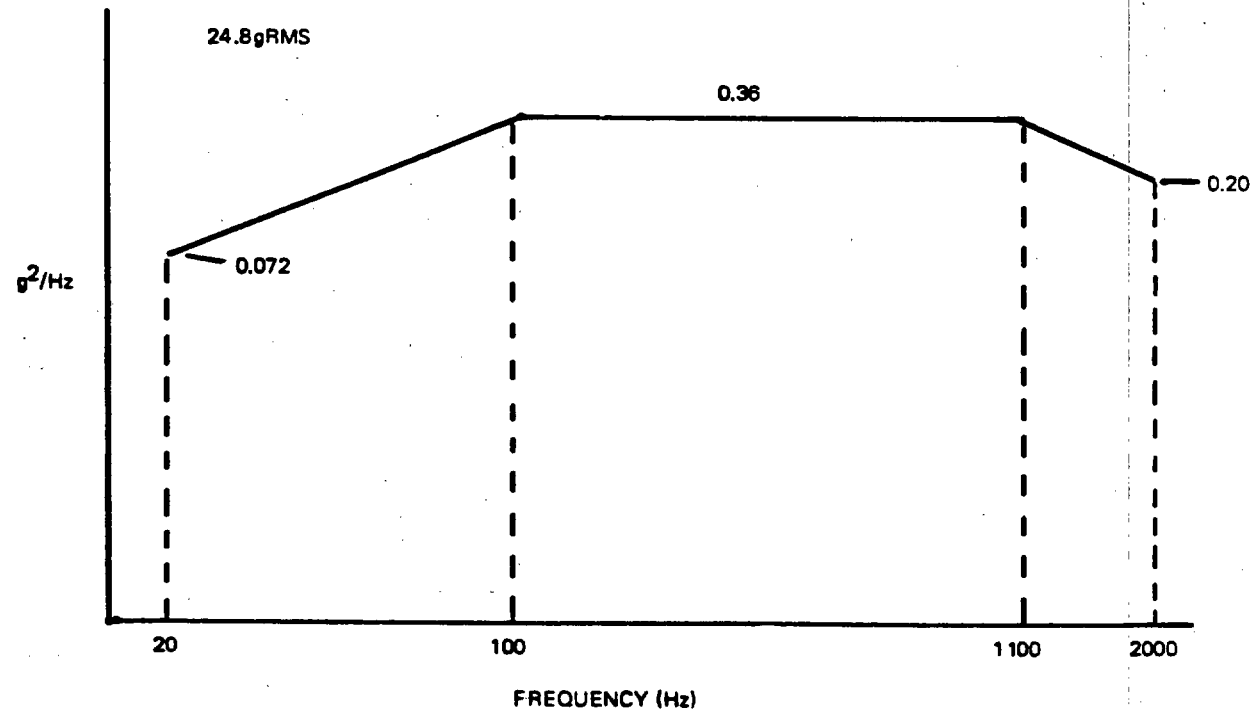


FIGURE 2. Critical design vibration spectrum for taped chaff packages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4.11.1.1 Aircraft. Flight tests will be conducted by the Government using an aircraft type which has previously been used to provide data to establish the minimum performance requirements specified in MIL-STD-2071.

4.11.1.2 Dispenser. The AN/ALE-2 dispenser shall be used for all RR-( )/AL flight tests, however, if an ALE-2 is not available, hand dispensing may be substituted. All tests will be conducted at an approximate dispensing rate of one unit every 5 seconds.

4.11.1.3 Loading. When the AN/ALE-2 dispenser is used, the chaff shall be loaded in accordance with procedures of TO 12P3-2ALE2-2. When the chaff packages are hand-dispensed, the tapes on each package shall be torn by hand prior to dispensing.

4.11.1.4 Radar. The RR-( )/AL chaff will be evaluated in accordance with the applicable specification sheet (see 3.1).

4.11.1.5 Sampling. The test objective will be to deploy eight packages per run and to conduct as many runs as required to deploy all of the test units that are available. Data shall be collected in all 15 gates for all the test samples.


4.11.1.6 Data processing requirements. The pulse-to-pulse RCS data will be processed as specified in MIL-STD-2071 to provide: shadow graphs; first level statistics, including summary sheets; and second level statistics for basic data, corrections for aspect angle, and corrections for aspect angle and antenna gain. A printout will be provided to show range, azimuth angle, elevation angle, and aspect angle for all data runs.

4.11.2 Radar cross-section procedures.

4.11.2.1 Aircraft operation. The aircraft will fly a "racetrack" course as specified in figure 3. The aircraft will follow the station TACAN to fly a course directly over the test radar. Chaff will be dispensed on the inbound radial. Upon initial radar acquisition, the aircraft will be directed to maximum range, then brought in for each run.

4.11.2.2 Data gathering. The test radar will track the aircraft during the entire radial inbound run. Provisions will be made to prevent breaklock by installing a radar beacon or Luneberg lens on the aircraft. Areas of old chaff inadvertently crossed, or segments of runs in which the radar broke lock on the aircraft will be identified using the shadow graph, and rejected as invalid data. Data gathered where the combination of aspect angle and range makes correction of RCS values questionable will be identified and rejected as invalid data. The range in yards divided by the sine of the aspect angle will be equal to or greater than specified in applicable specification sheet for acceptable data in gates 12 through 15. As depicted in figure 3, a standby and dispense command will be given at a range specified in the applicable specification sheet. Data recording will commence at the standby command and will continue for 5 seconds after termination of chaff dispensing. If old chaff creates an interference problem, a delayed start will be acceptable. The delayed start, however, may result in a short run and fewer than eight units may be deployed. Gate number 2 on the RCS processing equipment will track the aircraft and RCS data will be collected from gates 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

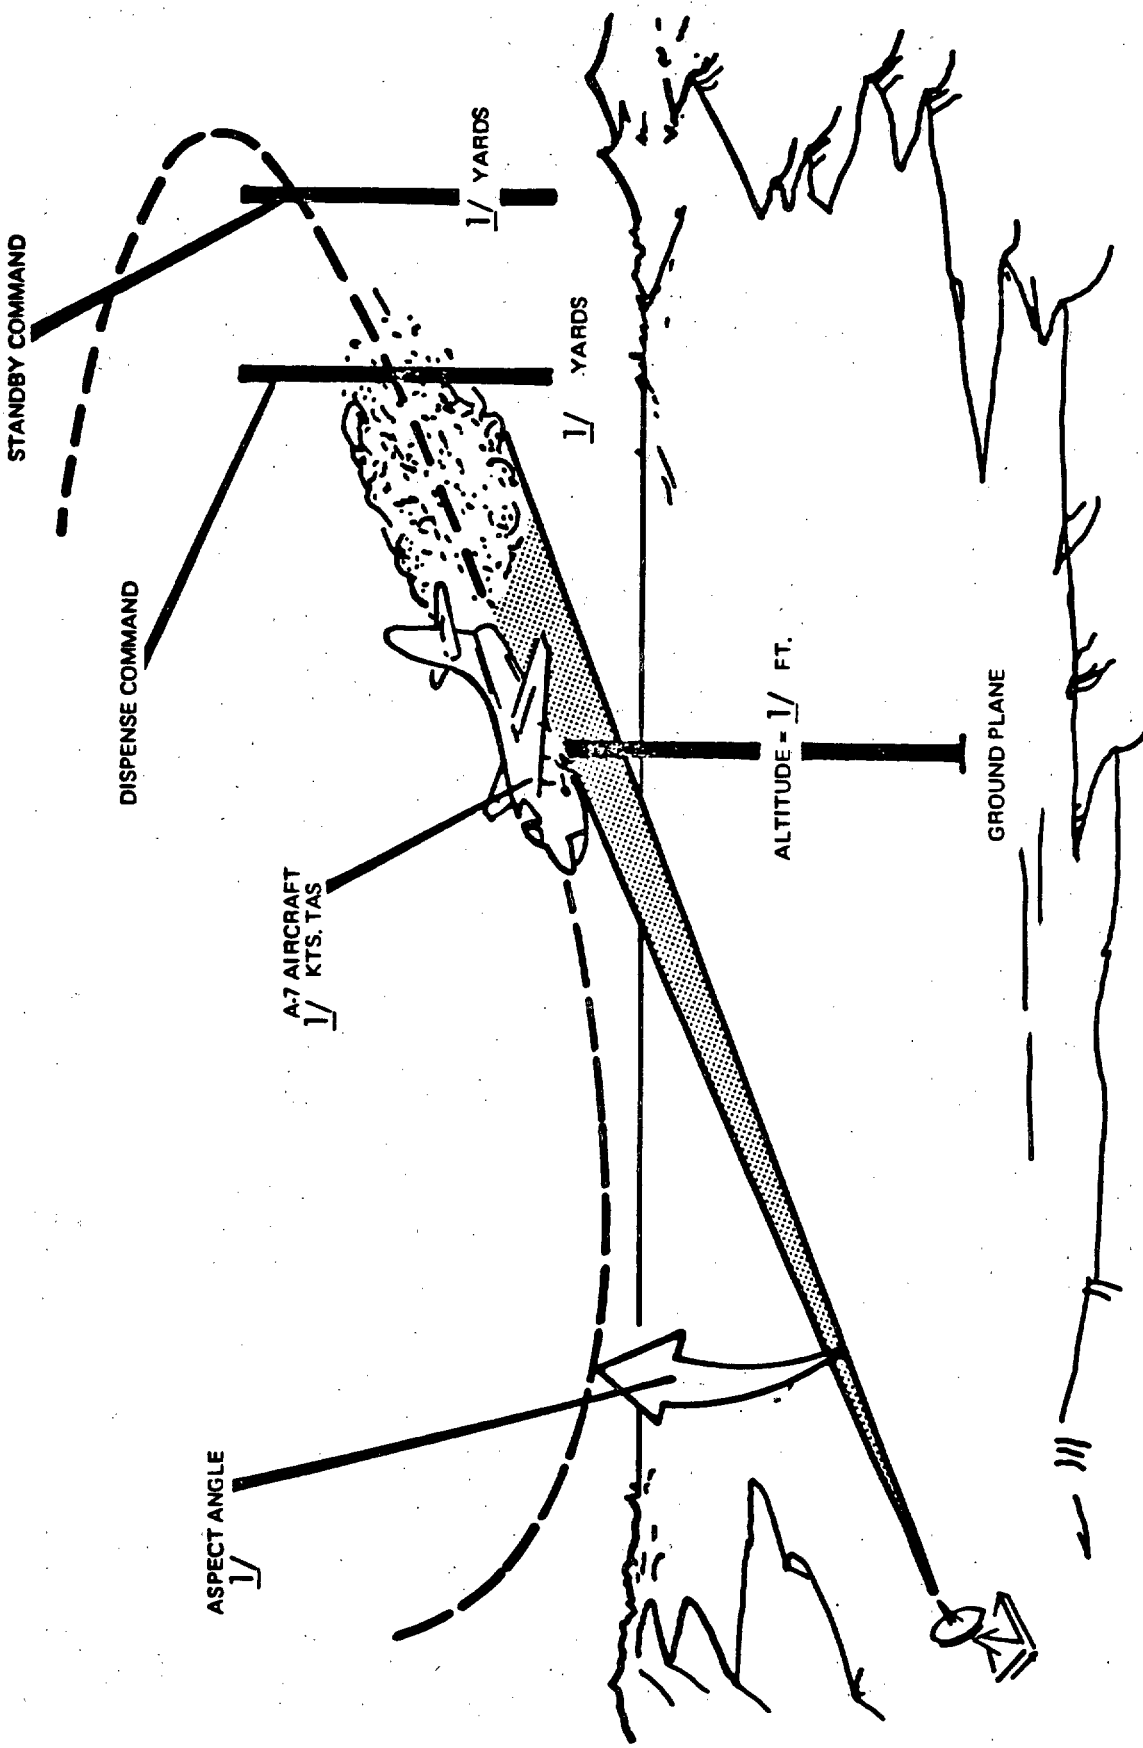

1/ Refer to applicable specification sheet for flight profile data.

FIGURE 3. Flight profile for testing of the RR-( )/AL chaff Package

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

through 15 which will be spaced the number of nanoseconds in time specified in the applicable specification sheet. A full scale value specified in the applicable specification sheet will be used (see 3.1).

4.11.2.3 Data evaluation. Data will be evaluated to determine the presence of at least nine gates of pulse-to-pulse data for each chaff unit meeting the requirements of the procedures for collecting data on chaff immediately behind the aircraft, and the requirements for aspect angle as specified in MIL-STD-2071. The shadow graph will be examined to ensure that at least eight gates of data for each unit meet the requirements for valid data as stated in 4.11.2.2 above. The valid data as shown by the shadow graphs will be identified for further data processing. The test data will be invalid for any chaff unit where less than nine gates contain valid RCS data.

4.11.2.4 Data processing. Data will be processed to obtain RCS values of dispensed chaff in the radar resolution cells the number of feet behind the aircraft specified in the applicable specification sheet. Processing will be accomplished in accordance with MIL-STD-2071 and provide the outputs specified in 4.11.1.6 herein. The data will be normalized to 10° aspect angle and 0° antenna boresight gain. The data will be processed to provide average RCS values and the weighted average of the number of consecutive gates specified in applicable specification sheets (see 3.1).

4.11.2.4.1 Data selection. A technique of using a running average of the number of consecutive pulse-to-pulse RCS values, specified in applicable specification sheet, will be used to define the data to be processed for each RR-( )/AL chaff package in each of the 12 sample gates. The center of the number of consecutive pulses specified in applicable specification sheet at which a maximum average is obtained will be the center of the data to be processed for the chaff unit and sample gate concerned. The procedure for selecting the data to be processed is specified in MIL-STD-2071 (see 3.1).

4.11.2.4.2 Calibration check. RCS measurement of a standard calibration sphere will be made prior to any chaff measurements. The sphere RCS data will be compared to the theoretical RCS of the sphere, and the calibration constant (ΔK) for the processor will be set to provide the measured sphere data as near as possible to the theoretical value of the sphere RCS. The corrected value of ΔK will be used in the first and second level data processing.

4.11.2.4.3 Correction factors. Correction factors will be in accordance with applicable specification sheet.

4.11.3 Pass/fail criteria. The RR-( )/AL chaff package will meet the requirement of 4.11.3.1.

4.11.3.1 Radar cross-section (RCS). The average of the pulse-to-pulse RCS values measured the number of feet behind the aircraft, specified in the applicable specification sheet, will meet or exceed the number of square meters specified in the applicable specification sheet per gate for any unit to be acceptable. This value will be achieved when the data are corrected to 10° aspect angle and boresight antenna gain. Additionally, the average of 10 or more units of chaff must equal or be greater than the number of square meters specified in the applicable specification sheet per gate for the conditions specified above. Only the units passing the individual chaff unit

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

RCS requirement will be used to compute the average of 10 or more units (see 3.1).

5. PACKAGING

5.1 General. All major units and parts of the equipment shall be preserved, packaged, packed, and marked for the level of shipment specified in the contract or purchase order (see 6.2.1) in accordance with MIL-STD-794 and as specified herein. Unless otherwise specified in the contract (see 6.2.1), the method of preservation-packaging shall be Method I, Submethod IA-15 in accordance with MIL-P-116 and this specification.

5.2 Detailed assembly in cartons. Unless otherwise specified in the contract (see 6.2.1), 64 chaff packages arrayed on dual carrier tapes shall be packed per inner carton in 8 layers of 8 packages each as specified in DL 1050AS102. The layers shall consist of closely adjacent packages having the intermediate length of tape lying flat between the packages. Packages may be omitted at intervals along the tapes only for the purpose of facilitating stacking in the cartons. The top layer shall have the chaff packages uppermost on the tape. The two tapes at the end of the top layer of packages and the two tapes at the opposite end, if over 4 inches in length, shall be placed parallel to the axis of the tape length in the carton.

5.3 Carton details. The taped packages shall be initially packed in folding boxes (RSC) in accordance with PPP-B-636 and DL 1050AS110 and in all cases a minimum of 200 pound test. The bottom longitudinal closure of the carton shall be completed by using a suitable length of filament reinforced tape, Type I or II conforming to PPP-T-45, with a minimum width of 3 inches. The four end joints formed by the flaps shall be sealed with paper tape, Type III conforming to PPP-T-45, with a minimum width of 3 inches. The top closure shall be completed after the carton is filled by using a suitable length of filament reinforced tape, Type I or II conforming to PPP-T-45, with a minimum width of 3 inches. A 6 inch length of this tape shall be left free at one end of the tape and folded back and sealed to itself for a length of 3 inches to provide a handle for grasping to use the tape as a ripcord in unsealing the top longitudinal flaps. The four end joints formed by the top flaps shall be sealed with paper tape, Type III conforming to PPP-T-45, with a minimum width of 3 inches. Cartons shall conform to the test requirements specified herein.

5.3.1 Barrier material. The initial folding box containing chaff packages shall be first enclosed in a one-piece wrapping of water vaporproof, oil resistant barrier material, Class 1, conforming to MIL-B-131. The barrier material shall be sealed by the application of heat as specified in MIL-B-131.

5.4 Packaging details.

5.4.1 Interior packaging. All interior cartons shall be packaged in accordance with MIL-P-116 and DL 1050AS110.

5.4.2 Exterior packaging. Consignments shall be prepared for either domestic or overseas shipments as specified by the procuring activity.

5.4.3 Outer carton. Two inner cartons, each wrapped and sealed in barrier material, shall be placed in an additional V3C carton with a minimum

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

of 400 pound test in accordance with PPP-B-636 and DL 1050AS110. A case liner composed of Kraft paper in accordance with UU-P-268 shall be used.

5.4.4 Marking. The inner cartons, barrier material, and outer carton shall be permanently stamped in waterproof, petroleum resistant ink as specified in MIL-STD-129 and DL 1050AS110.

5.5 Packing (domestic and overseas packing, of material in cartons). Two of the outer cartons in accordance with DL 1050AS110 shall be placed in a wooden box, style 2, 2-1/2, 3 or 4, constructed in accordance with PPP-B-621. Galvanized strapping meeting the requirements of DL 1050AS110 shall be used.

5.5.1 Marking for shipment. Shipping containers shall be marked in accordance with 5.4.4 and as specified in the contract (see 6.2.1).

6. NOTES

6.1 Intended use. The RR-( )/AL taped chaff package assembly is intended for use with the AN/ALE-1 or AN/ALE-2 chaff dispensers.

6.1.1 Alternate use. The taped chaff package is compatible with the MX-900 ( ) chaff dispenser. If this application is desired, however, alternate methods of packing should be specified in the contract (see 6.2.1).

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification

b. Levels of preservation - packaging packing, and marking required (see section 5)

c. Alternate use tape chaff package requiring alternate methods of packaging (see 6.1.1)

d. If design, construction or workmanship are to be other than specified (see 3.4)

e. If first article is required (see 3.2, 4.2).

f. If test procedures are to be expanded or modified (see 4.5)

6.2.2 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL), the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DAR 7-104.9 (n) (2) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

Paragraph no.	Data requirement title	Applicable DID no.	Option DID no.
3.3.2, 4.5	Procedure, First Article Inspection	DI-T-4901	
4.2.1	Report, First Article Inspection	DI-T-4902	
4.4	Report, Quality Conformance Test	DI-T-4904	
4.4.3.2	Procedure, Special Test	DI-T-4903	
4.4.4c	Proposal, Corrective Action	UDI-T-23719	
4.5	Procedure, Quality Conformance Test	DI-T-4903	

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 First article. When a first article inspection is required, the item will be tested and should be a first article sample. The first article sample should consist of the number units specified in the contract. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination and test approval of the documents first article.

6.4 Definitions. The following definitions apply to this specification:

6.4.1 Carrier Tapes. The tapes to which chaff packages are attached, and which are drawn through the AN/ALE-1 or AN/ALE-2 dispenser to deploy the chaff packages.

6.4.2 Chaff cut. A quantity of dipoles cut from a chaff hank to provide one row of dipole elements within a chaff package.

6.4.3 Chaff hank. An assemblage of drawn metallized glass fibers or slit metallic strands produced by one machine prior to the dipole cutting operation. The number of fibers or strands in the chaff hank is normally equivalent to the number of dipoles required for each chaff cut within a specific chaff package.

6.4.4 Chaff package. The package configuration containing the chaff payload for use with the AN/ALE-1 or AN/ALE-2 dispensing sets.

6.4.5 Equipment. As used herein, refers to a chaff package or taped package assembly.

6.4.6 Lot, chaff-cut. A chaff-cut lot shall consist of all chaff-cuts produced by one cutting machine for use in the chaff package payload. The lot shall contain as a maximum that quantity of chaff-cuts necessary to produce one chaff package assembly lot.

6.4.7 Lot, chaff-hank. A chaff-hank lot shall consist of all chaff hanks produced by the same production machine and submitted for inspection at one time. This lot shall not contain more hanks than are required to produce one chaff package assembly lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

6.4.8 Lot, chaff package. A chaff package lot shall contain that quantity of chaff packages necessary to produce one chaff package assembly lot.

6.4.9 Lot, chaff package assembly. A chaff package assembly lot shall contain that quantity of chaff package assemblies specified in the contract or purchase order.

6.4.10 Lot, receiving inspection. A receiving inspection lot shall consist of all material of one type received from one supplier at one time.

6.4.11 Outer sleeve. Refers to the outer package which contains the chaff elements. When deployed, the package is free to open, and the chaff elements are free to disperse.

6.4.12 Package tabs. Refers to the tabs of the outer sleeve which are used to hold the chaff package to the carrier tapes.

6.4.13 Taped chaff package. One chaff package attached to the carrier tapes.

6.4.14 Taped chaff package assembly (chaff package assembly). Refers to the carrier tapes, packages, and fasteners. Normally, a taped package assembly contains 64 chaff packages.

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Preparing Activity:
Navy - AS
(Project 5865-N030)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-85002B(AS) Chaff Package (Type RR-( )/AL), General Specification For

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 Replaces edition of 1 Jan 72 which may be used. S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.