MILITARY SPECIFICATION

# COVERALLS, FLYERS, KNIT, HIGH TEMPERATURE RESISTANT ARAMID CWU-48/P

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use be all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers the requirements for two configurations of high temperature resistant aramid knit flyer's coveralls.

1.2 Classification. The high temperature resistant aramid knit flyer's coveralls shall be furnished in the following configurations and sizes, as specified (see 6.2(b) and (c)):

1.2.1 Configuration. The coveralls shall be furnished in the following configurations, as specified (see 6.2(b)):

| | |
|---|---|
| -CWU-48P | Without knife pocket |
| -CWU-48A/P | With knife pocket |

1.2.2 Sizes. The coveralls shall be furnished in the following sizes as specified (see 6.2(c)):

SIZES

| | | | |
|---|---|---|---|
| 36S | 38L | 42R | 46S |
| 36R | 40S | 42L | 46R |
| 36L | 40R | 44S | 46L |
| 38S | 40L | 44R | 48R |
| 38R | 42S | 44L | 48L |

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Engineering Specifications and Standards Department (Code 93), Naval Air Engineering Center, Lakehurst, NJ 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

| | |
|---|---|
| V-B-871 | -Button, Sewing Hole, and Button, Staple (Plastic) |
| V-F-106 | -Fasteners, Slide, Interlocking |
| UU-P-268 | -Paper, Kraft, Wrapping |
| DDD-L-20 | -Label, For Clothing, Equipage and Tentage, (General Use) |
| PPP-B-636 | -Box, Shipping Fiberboard |
| PPP-T-45 | -Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing |

MILITARY

| | |
|---|---|
| MIL-W-4088 | -Webbing, Textile, Woven Nylon |
| MIL-F-21840 | -Fastener, Tape, Hook and Pile, Synthetic |
| MIL-T-43636 | -Thread, Nylon, Non-Melting |
| MIL-C-81104 | -Cord, Polyamide, High Temperature Resistant |
| MIL-C-83429 | -Cloth, Plain and Basket Weave, Aromatic Polyamide, Non-Melting |
| MIL-C-85101 | -Cloth, Warp Knit, Aramid, High Temperature Resistant |

STANDARDS

FEDERAL

| | |
|---|---|
| FED-STD-751 | -Stitches, Seams, and Stitching |

MILITARY

| | |
|---|---|
| MIL-STD-105 | -Sampling Procedures and Tables for Inspection by Attributes |
| MIL-STD-129 | -Marking for Shipment and Storage |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

(When requesting any of the applicable documents refer to both title and number. All requests should be made via the cognizant Government quality assurance representative. Copies of unclassified specifications and standards required by contractors in connection with specific procurements should be obtained upon application to the Commanding Officer, Naval Publications and Forms Center, (Code 1051), 5801 Tabor Avenue, Philadelphia, PA 19120. All other documents should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article. Unless otherwise specified, the coveralls furnished under this specification shall be a product which has been inspected and has passed the first article inspection specified in 4.3 through 4.3.2.

3.2 Materials and components. The materials and components shall conform to the applicable specifications and standards as listed or required herein.

3.2.1 Cloth.

3.2.1.1 Coverall. The coverall shall be fabricated from high temperature resistant aramid knit fabric conforming to MIL-C-85101. The color shall match Sage Green 1565, when inspected as specified in 4.5.1.

3.2.1.2 Lining. The slide fastener flaps for the side pass-throughs and ankle closure slide fasteners and the inside layers of the breast, leg, hip and knife pockets, including the retainer strap for the breast pocket, shall be fabricated from plain weave aromatic polyamide cloth conforming to MIL-C-83429, Type II. The color shall match Sage Green 1565 when inspected as specified in 4.5.1. The size, shape, and location of the aforementioned shall be governed by the patterns.

3.2.1.3 Interlining. The interlining for the collar and epaulets shall be Style #TD67 non-woven nylon interlining with 100 percent polyamide web adhesive as manufactured by Pellon Corporation, 1120 Avenue of the Americas, New York, New York 10036, or equivalent. The color of the interlining shall be charcoal grey. The size, shape, and location of the interlining shall be governed by the patterns.

3.2.1.4 Collar, front closure facing, hanger, outside pockets, neck closure strap and epaulets. The collar, front closure facing, hanger, outside pockets, neck closure strap, and epaulets shall be fabricated from the coverall cloth, 3.2.1.1. The size, shape, and location of the aforementioned shall be governed by the patterns.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

3.2.1.5 Trim. The trim for the collar, epaulets, back seaming and back waist seaming shall be fabricated from bias tape 1 inch wide. All bias tape shall be fabricated from high temperature resistant aramid plain or twill weave cloth, cut on a bias of 45 degrees. The weight of the cloth shall be a minimum of 3.0 ounces per square yard and a maximum of 6.0 ounces per square yard. The color shall be black. The location of the trim shall be governed by the patterns and Figures 1 through 26, as applicable. When attached in seams or along folded edges, as applicable, the trim shall be exposed to a width of 1/8 to 3/16 inch, beyond the seamed or folded edge.

3.2.2 Webbing

3.2.2.1 Nylon. The nylon webbing, for the knife pocket, shall conform to MIL-W-4088, Type XII, color optional.

3.2.3 Thread. All the sewing operations shall be performed with the aramid filament thread conforming to MIL-T-43636, Type I, Size E. The color of the thread shall approximately match the color of the coverall cloth, 3.2.1.1, when inspected as specified in 4.5.1.

3.2.4 Slide Fasteners. The slide fasteners shall conform to V-F-106 and Table I. The chain endurance inspection of V-F-106 is applicable. The chain and all other metal components shall be brass with a black chemical finish, except that the sliders may be zinc alloy, brass plated, black finish. The slide fastener tapes and beads shall be fabricated from high temperature resistant aramid, dyed to approximately match the color of the coverall cloth, 3.2.1.1, when inspected as specified in 4.5.1, and shall have at least good colorfastness to laundering. All the metal components of each slide fastener shall have been fabricated by the same manufacturer so as to assure compatibility and proper function of each slide fastener. The locations and lengths of the slide fasteners shall be governed by the patterns.

3.2.5 Fastener tapes. The nylon hook and pile tapes shall conform to MIL-F-21840, Type I, Class 1. The width of the pile tape for the nameplate shall be 2 inches. The width of the hook and pile tapes for the sleeve pencil pocket shall be one inch on the flap, for the pile tape, and 5/8 inch on the pocket, for the hook tape. The width of the hook and pile tapes, for the knife pocket on the Type II coverall shall be one inch on the flap portion for the pile tape, and one inch for the hook tape on the coverall. The width of the hook and pile tapes for the hip pockets shall be 3/8 inch on the yolk piece for the pile tape and 3/8 inch on the front leg panel for the hook tape. The locations and lengths of the fastener tapes, for the various sizes of the coveralls, shall be governed by the patterns. The color of the fastener tapes shall approximately match the color of the coverall cloth, 3.2.1.1, when inspected as specified in 4.5.1, or may be black.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

3.2.6 Button. The buttons for the neck closure strap shall conform to V-B-871, Type II, Class D, Style 15 or 19, Size 18 lines. The color of the buttons shall approximately match the color of the coverall cloth, 3.2.1.1, when inspected as specified in 4.5.1.

3.2.7 Closure loop. The closure loop, for the neck closure strap shall be fabricated from the high temperature resistant cord conforming to MIL-C-81104. The color of the cord shall approximately match the color of the coverall cloth, 3.2.1.1, when inspected as specified in 4.5.1.

3.3 Design. The coverall shall be a one piece unlined high temperature resistant aramid garment conforming in appearance to Figures 1, 2, and 3, as applicable.

3.4 Construction. The coveralls shall be fabricated in accordance with Figures 1 through 26.

3.4.1 Cutting. The coveralls shall be cut in strict accordance with the patterns furnished by the Government (see 3.7, 3.7.1, and 6.4) which show seam allowance, size, shape, and placement of the pockets, epaulets, slide fasteners, fastener tapes, directional lines for cutting, and notches or markings for the proper assembly of all the parts. The Government patterns shall not be altered in any manner and shall be used for the making of the working patterns. The working patterns shall be identical to the Government furnished patterns. The directional lines shall be in the wale direction. The component parts shall be cut from the same ply of the lay. The undercollar, facing and hanger may be cut from the ends. The hanger may also be prefabricated from one continuous piece of coverall cloth and then cut to the proper length as required by the patterns and 3.4.4., as applicable.

3.4.2 Shade and size marking. Except for those parts cut from the ends (see 3.4.1), all the component parts of the coverall shall be marked or ticketed, by any commerical method, to insure a uniform shade throughout the coverall and for the proper assembly of the coveralls. No metal fastening device or sewn-on ticket shall be used. The shade and size markings may be accomplished by the use of an ink pad numbering machine, rubber stamp, or pencil, provided the markings do not show through the outerside of the coveralls and are not deleterious to the cloth. The markings placed on the seam allowance shall not be visible on the outerside of the coveralls. The adhesive type shade and size marking tickets may be used, for the shade and size markings, provided they conform to 3.4.2.1. The assembled coveralls shall not contain any shade or size marking ticket nor any marking that was used for locating the position for attaching any component.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

3.4.2.1 Adhesive shade and size marking tickets. The adhesive shade and size marking tickets shall be fabricated from paper and shall contain a thermo-activated type adhesive on one side. The adhesive shall not discolor or damage the cloth and the adhesive mass shall not adhere to the cloth, upon removal of the ticket. The heat used to attach the thermo-activated adhesive tickets shall not stiffen, harden, scorch, or damage the cloth in any manner.

3.4.3 Seams and stitching. All the seams and stitching used in the fabrication of the coveralls shall conform to Figures 3 through 26. All the regular sewing shall be accomplished with Stitch Type 301, 8 to 10 stitches per inch. The stitch and seam types shall conform to FED-STD-751. All visible cut edges of the lining cloth shall be finished using Stitch Type 502, 503, 504, 505, or equivalent, and using Seam Type EFd. Finishing of the cut edges of the knitted coverall cloth is not required. All the seam edges shall be properly forced out and shall not contain any folds. No seam or component shall be twisted, puckered, or pleated and no part of the coverall shall be caught in an unrelated operation or seam. All the thread ends shall be trimmed to a maximum length of 3/8 inch.

3.4.3.1 Sewing. Each row of stitching shall be straight and parallel to the seam edge. The straightness of the stitching in any row shall be maintained within a tolerance of plus or minus 1/32 inch. Unless otherwise specified, stitching located from folded edges shall be 1/16 to 3/32 inch from the folded edge. The stitching on the fastener tapes shall be 1/8 inch from the edge. Seam allowances shall be as specified on the government furnished patterns. The ends of the stitching, that are not caught in other seams or stitching, shall be securely backstitched, by overlapping on themselves, for at least 1/2 inch. Any thread breaks, skips, and run-offs shall be overstitched not less than one inch. The thread tension shall be maintained so that there shall not be any loose or tight stitching and the lock shall be embedded in the materials sewn together.

3.4.3.2 Sewn eyelet. The sewn eyelet, for the knife tie cord, shall be sewn on the outer portion of the knife pocket as specified in Figure 16. The bight of the stitching, around the eyelet, shall be a minimum of 1/16 inch. The start and finish stitching shall overlap each other 1/16 to 3/32 inch. The inner diameter of the eyelet shall be 1/4 ±1/32 inch. The sewn eyelet shall contain 35 to 40 stitches. The number of stitches per eyelet shall be determined by counting the number of needle penetrations in the outer diameter of the eyelet. The overlapping stitches shall also be included, when determining the number of stitches in the eyelet. The eyelet shall be constructed with Stitch Type 401, 502, or 503. When Stitch Type 401 is used, the purling shall be on the innerside of the pocket. When Stitch Type 502 or 503 is used, the outerside purling shall be located on the outer diameter of the eyelet and the innerside purling shall not be pulled to the outerside of the pocket. The thread ends shall be on the innerside of the pocket.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

3.4.3.3 Bartacking. Each bartack located as specified in Figures 24 through 26 shall be 3/8 inch long and shall contain a minimum of 21 stitches.

3.4.4 Hanger. The hanger shall be 1/4 to 3/8 inch wide and 3 to 3-1/2 inches long. The hanger shall be constructed of the knit coverall fabric, 3.2.1.1, and in accordance with Figure 7, View K. The hanger shall be attached so that the inside dimension of the loop formed shall be 1-1/2 to 1-3/4 inches.

3.4.5 Nameplate. Unless otherwise specified, an identical size of the hook fastener tape shall be affixed to the pile fastener tape, for use as a mounting for the wearer's nameplate (see 6.2(d)).

3.4.6 Closure of the slide fasteners. The slide fasteners, in the various locations of the coverall, shall be closed, by the slider, in the direction specified in Table II. The manner in which each slide fastener is attached to the coverall shall not interfere with the movement of any slider.

3.4.7 Covering of the slide fasteners. The outer cloth edges or welt of each pocket opening, as applicable, that contains a slide fastener shall be flush with the slide fastener coils. The coils, when locked together, shall be completely concealed by the outer cloth edges or welts of the pocket opening (See Figures 11 through 16, 18, 19, 21, and 22). The slide fasteners for the front closure, each side pass-through and each leg closure shall be attached in such a manner that the cloth edges of these openings are flush with the slide fastener coils. The coils, when locked together, shall be completely concealed by the front, side pass-throughs and each leg opening edges (See Figures 5, 18, 19, 21, 22, and 23).

3.5 Label. The identification label shall be centered on the back within 1/2 inch, and sewn to the innerside of the coverall, at the back, as specified in Figure 24. The label shall conform to DDD-L-20, Type I, Class 1, Launderable Label. The size of the label shall be as specified in Figure 24 and shall contain the following information:

CWU-48/P or CWU-48A/P (as applicable)
High Temperature Resistant Aramid Knit
Flyer's Coveralls

Size
MIL-C-85078
Contract or Order Number
Name of Manufacturer
Date of Manufacture (Month and Year)
NSN



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

This coverall is fabricated from an inherently high temperature resistant material that does not melt or drip. Can be laundered without losing its high temperature resistant properties and no retreatment is necessary.

3.6 Workmanship. After completion of the final assembly, the coveralls shall be thoroughly cleaned and all thread scraps, lint, and foreign matter shall be removed. The metal components shall not be misaligned or distorted nor contain any corrosion, scale, pit, dent, crack, nick, burr, sliver, or sharp edge. The coveralls shall not contain any tear, cut, mend, patch, needle chew, abraded area, burn spot, stain, or non-specified hole. The coveralls shall conform to the quality and grade of product established by this specification. The occurence of defects shall not exceed the acceptance criteria established herein.

3.7 Patterns. Standard patterns will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used for cutting the supplier's working patterns. The working patterns shall be identical to the standard patterns.

3.7.1 Pattern parts. The component parts shall be cut from the material specified in accordance with the following pattern parts:

| Material | Pattern parts | Cut parts |
|---|---|---|
| Aramid Knit Cloth | Front Panel | 2 |
| | Center Back Panel | 1 |
| | Side Back Panel | 2 |
| | Front Leg Panel | 2 |
| | Back Leg Panel | 2 |
| | Upper Sleeve | 2 |
| | Under Sleeve | 2 |
| | Front Facing | 2 |
| | Upper Collar | 1 |
| | Under Collar | 1 |
| | Epaulet | 2 |
| | Cigarette Pocket Main Piece | 1 |
| | Cigarette Pocket Side Piece | 1 |
| | Pencil Pocket Main piece | 1 |
| | Outer Ply Pencil Pocket Piece | 1 |
| | Pencil Pocket Flap | 1 |
| | Knife Pocket | 1 |
| | Hip Pocket Yolk Piece | 2 |
| | Breast Pocket Welt | 2 |
| | Upper Leg Pocket Welt | 4 |
| | Lower Leg Pocket Welt | 4 |
| | Neck Closure Strap | 1 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

| Material | Pattern parts | Cut parts |
|---|---|---|
| Aramid Woven Lining Cloth | Hip Pocket Lining - Back Piece | 2 |
| | Hip Pocket Lining - Front Piece | 2 |
| | Breast Pocket Lining - Front Piece | 1 |
| | Breast Pocket Lining - Back Piece | 1 |
| | Upper Leg Pocket | 2 |
| | Lower Leg Pocket | 2 |
| | Knife Pocket Flap Lining | 1 |
| | Side Pass-Through Slide Fastener Flap | 2 |
| | Leg Opening Slide Fastener Flap | 2 |
| Fusible Interlining | Collar Interlining | 1 |
| | Epaulet Interlining | 2 |

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The examination and testing of the high temperature resistant aramid knit flyer's coveralls shall be classified as follows:

a. First article inspection. First article inspection consists of examinations and tests performed on samples which are representative of the production item after award of a contract to determine that the production item conforms to the requirements of this specification (see 3.1 and 4.3 through 4.3.2).

b. Quality conformance inspection. Quality conformance inspection consists of examinations and tests performed on individual products or lots to determine conformance of the products or lots with the requirements set forth in this specification (see 4.4 through 4.4.1.2).

4.3 First article inspection. The first article inspection of the high temperature resistant aramid knit flyer's coverall assemblies shall consist of examinations and tests for all of the requirements of this specification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

4.3.1 First article samples. Unless otherwise specified, as soon as practicable after the award of the contract or order, the manufacturer shall submit two coveralls of any size specified in the contract or order. The samples shall be representative of the construction, workmanship, components, and materials to be used during production. When a contractor is in continuous production of these coveralls from contract to contract, submission of further first article inspection samples, on the new contract, may be waived at the discretion of the procuring activity (see 6.2(e)). Approval of the first article inspection samples or the waiving of the first article inspection does not preclude the requirements for performing the quality conformance inspection. The first article inspection samples shall be furnished to the Government as directed by the contracting officer (see 6.2(f)).

4.3.2 Upon completion of the first article inspection, all the applicable inspection reports and when applicable, recommendations and comments pertinent for use in monitoring production will be forwarded to the cognizant Government activity. One of the approved first article inspection samples of the coveralls will be returned to the manufacturer for use in monitoring production. The other coverall will be destroyed in the first article inspection and shall not be considered as part of the quantity to be delivered under the contract or order.

4.4 Quality conformance inspection. The sampling and inspection levels shall conform to MIL-STD-105. The quality conformance inspection shall consist of the following:

Visual examination of the coveralls

Packaging

4.4.1 Sampling.

4.4.1.1 Inspection lot.

4.4.1.1.1 Coveralls. An inspection lot size shall be expressed in units of one coverall made essentially under the same conditions and from the same materials and components. The sample unit shall be one coverall.

4.4.1.1.2 Packaging. An inspection lot size shall be expressed in units of one fully prepared shipping container, containing coveralls of one size, fully prepared for delivery from essentially the same materials and components. The sample unit shall be one shipping container, containing coveralls of one size, fully prepared for delivery with the exception that it need not be sealed.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

4.4.1.2 Sampling for the examinations and tests of the coveralls and packaging. The sample size, acceptance criteria, examinations, and tests required, for the coveralls or the preparation for delivery, as applicable, shall be as specified in Table III.

4.5 Inspection methods.

4.5.1 Color matching. The color of the coverall cloth, thread, lining cloth, slide fastener tapes and the fastener (hook and pile) tapes (when not black in color) shall be compared to the approved standard shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin.

4.5.2 Visual examination.

4.5.2.1 Coveralls. Each coverall selected as a sample unit from the lot, shall be examined visually to determine conformance to this specification. The classification of defects, Table IV, shall be used to classify the defects found.

4.5.2.2 Packaging. Each of the fully prepared shipping containers, containing coveralls of one size, selected as a sample unit from the lot, shall be visually examined to determine that the packaging, packing, and marking conform to this specification. The list of defects, Table V, shall be used to enumerate the defects.

5. PACKAGING

5.1 Packaging. Packaging shall be Level A or C, as specified (See 6.2(h)).

5.1.1 Level A. The slide fasteners of the front, each leg opening, each side pass-through and of each sleeve, breast, upper leg, and lower leg pockets shall be fully closed. The fastener tapes of the knife, sleeve, and hip pockets shall be mated to close the pockets. When applicable (see 6.2(d)), the hook fastener tape, for mounting the wearer's nameplate, shall be mated to the pile fastener tape attached to the left breast. Each coverall shall be neatly folded, in accordance with commercial practice, to an approximate size, 11-1/2 by 14-1/2 inches. A paper label shall be inserted (see 5.3.1) and each folded coverall shall be heat sealed within a clear polyethylene bag of 0.00125 ±.00025 inch gage film. The heat seal seams shall be straight, continuous, and parallel to each other and the edges of the polyethylene bag. No coverall shall be deformed, distorted, or bent in the bagged condition nor shall the polyethylene bag be damaged. No part of any coverall shall be caught in any heat sealed seam. One corner of each bag shall contain a hole, 1/4 inch in diameter, to allow the excess air to escape. As an alternate, the final closure of the bag may be accomplished by use of a tuck or reverse flaps. The approximate flat size of the polyethylene bag shall be 13 by 17 inches.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. The coveralls shall be packaged to afford the minimum degree of protection necessary to prevent deterioration or damage during shipment under normal environmental conditions and commercial modes of transportation.

5.2 Packing. Packing shall be Level A, B, or C, as specified (see 6.2(h)). Each shipping container shall contain only coveralls of one size.

5.2.1 Level A. Twenty coveralls, packaged as specified in 5.1, shall be packed as specified in 5.2.2, except that the fiberboard container shall be Type CF, Weather Resistant Class, Variety SW, Grade V3c. In addition, each container shall be reinforced with flat steel strapping or tape banding in accordance with the appendix to PPP-B-636.

5.2.2 Level B. Twenty coveralls, packaged as specified in 5.1.1, shall be packed within a snug fitting fiberboard container conforming to PPP-B-636, Type CF or SF, Domestic Class, Variety SW, Grade 275. The bagged coveralls shall be placed in the container as follows:

a. In two equal tiers.

b. The long dimension of the folded garment shall be parallel to the end panels of the container.

c. Every other garment shall be in a reverse position to the one below it.

The top and bottom of the contents of each shipping container shall be completely covered with a sheet of 30 pound minimum basis weight kraft paper conforming to UU-P-268, Grade B. The body joint and the top and bottom flaps shall be firmly glued together as specified in PPP-B-636. The fiberboard container shall not contain any metal fastenings or stitches. All the seams and joints shall be sealed with 3 inch minimum wide tape conforming to PPP-T-45 Type III, Grade A, B, or C. Each container shall be constructed and closed in accordance with the appendix to PPP-B-636. Toward the end of the contract or when there are less than the specified amount for the same size per container, mixed sizes may be packed within the same shipping container (see 5.3.2).

5.2.3 Level C. The coveralls, packaged as specified in 5.1, shall be packed within exterior type shipping containers in a manner that shall insure safe transportation at the lowest rate to the point of delivery. The shipment shall conform to the minimum requirements of the rules and regulations applicable to the mode of transportation selected.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract or order (See 6.2(i)), the exterior containers shall be marked in accordance with MIL-STD-129 and shall contain the following information:

CWU-48/P or CWU-48A/P, as applicable, High Temperature
Resistant Aramid Knit Flyer's
Coveralls

Size
MIL-C-85078
Contract or Order Number
Name of Manufacturer
Date of Manufacturer (Month and Year)
NSN

5.3.1 Polyethylene bag. Prior to heat sealing, a white paper label, with legible and durable black letters and numerals, shall be placed inside each polyethylene bag. The label shall be placed so that it shall be capable of being read through the bag. The paper label shall contain the following information:

CWU-48/P or CWU-48A/P, as applicable, High Temperature
Resistant Aramid Knit Flyer's Coveralls
Size
MIL-C-85078
Contract or Order Number
Name of Manufacturer
Date of Manufacture (Month and Year)
NSN

5.3.2 Mixed sizes container. A white paper label, approximately 5 by 4 inches, with legible black letters and numerals shall be securely attached to the end and side of each container containing mixed sizes of the coveralls. The label shall contain the following information;

MIXED SIZES
Sizes and quantity of each size

6. NOTES

6.1 Intended use. The high temperature resistant aramid knit flyer's coveralls covered by this specification are intended to be worn as an outer garment of flight clothing for protection in the event of fire in an aircraft.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number, and date of this specification
b. Configuration desired (see 1.2.1)
c. Size and quantity desired (see 1.2.2)
d. Whether the hook fastener tape, for mounting the wearer's nameplate, is required (see 3.4.5)
e. Whether first article inspection is waived (see 4.3.1)
f. Name and address of the first article inspection laboratory (see 4.3.1)
g. Selection of applicable levels of packaging and packing (see 5.1 through 5.1.2 and 5.2 through 5.2.3)
h. Whether any special markings are required (see 5.3)

6.3 Patterns. Patterns, for the coveralls, will be furnished by the contracting officer, to the contractor, for use in cutting working patterns (see 3.4.1, 3.7, and 3.7.1.)

6.4 Data. For the information of contractors and contracting officers, any of the data, specified in applicable documents, listed in Section 2 of this specification, or referenced lower-tier documents, need not be prepared for the Government and shall not be furnished to the Government unless specified in the contract or order. The data, to be furnished, shall be listed on DD Form 1423 (Contractor Data Requirements List), which shall be attached to and made a part of the contract or order. NavWeps Form 4200/30 (Drawings, Lists, and Specifications Required) shall be attached, where applicable.

Custodians:
Army - GL
Air Force - 45

Preparing activity:
Navy - AS
Project No. 8415-0119

Review Activities:
DLA - CT
Army - AV



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

TABLE I. Slide fastener characteristics.

| Location | Description | | | |
|---|---|---|---|---|
| | Type | Style | Size | Pull |
| Front closure | I | 15 | MS | Short Tab 1/ |
| Leg closure | I | 3 | M | Short Tab |
| Cigarette, breast, and leg pockets | I | 7 | M | Short Tab |
| Side pass-through | I | 7 | M | Short Tab |

1/ The short tab pull for the front closure slide fastener shall not exceed 3/4 inch in overall length, as described in Figure 1 of V-F-106.

TABLE II. Slide fastener closures.

| Location | Direction of slide fastener closure |
|---|---|
| Front closure: | |
| Top slider | Upward |
| Bottom slider | Downward |
| Pockets: | |
| Breast | Towards the front closure |
| Sleeve cigarette pocket | Upward |
| Upper Leg | Towards the side seam |
| Lower Leg | Towards the side seam |
| Ankle closure | Downward |
| Side pass-throughs | Upward |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

TABLE III. Sample size, acceptance criteria, examinations, and tests of the coveralls and packaging

| Inspection | Paragraph | | Sample size | Acceptance criteria |
|---|---|---|---|---|
| | Requirement | Method | | |
| Visual examination | 3.3 through 3.6 and Figures 1 through 26, as applicable | 4.5.2.1 and Table IV | Inspection Level II | An acceptable quality level of 2.5 defects per 100 units for major defects and 6.5 defects per 100 units for total (major plus minor) defects |
| Packaging | Section 5 | 4.5.2.2 and Table V | Inspection Level S-2 | An acceptable quality level of 2.5 defects per 100 units |

TABLE IV. Classification of defects for the visual examination of the coveralls.

| Defect | Major | Minor |
|---|---|---|
| GENERAL | | |
| a. Any hole, scissors or knife cut, tear, mend, burn or weakening defect such as smash, multiple float, loose slub, needle chew, or abraded area | X | |
| b. Any portion of any coverall stiffened, hardened, or scorched by any process of manufacturing | X | |
| c. Any unsightly slub, spot, or stain; any discoloration of the cloth caused by the removal of any size marking ticket, excluding the metal fastening or sewn-on kind not removed; any size marking identification stamping visible on the outerside of any coverall, or any size marking adhesive mass adhering to the cloth. | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects for the visual examination of the coveralls. (Continued)

| Defect | Major | Minor |
|---|---|---|
| d. Any metal fastening device or sewn-on size marking ticket attached to the coverall | X | |
| e. Three or more thread ends or seam stitching ends not trimmed to a maximum length of 3/8 inch or three or more thread scraps not removed | | X |
| f. Any dropped stitch | X | |
| g. Any snag, pull, slubby yarn, or knit too tight or loose (lacking of elasticity) | | X |
| h. Wales in any coverall part not in the direction specified by the patterns | X | |
| SLIDE FASTENER 1/ | | |
| a. Any non-specified kind, type, size, or style; any slider that does not contain a short tab pull; or any part of any assembly omitted, bent or broken | X | |
| b. Any portion of the coverall or slide fastener tapes puckered, twisted, or pleated at the slide fastener tape joining seam, when the slide fastener is open or closed | | X |
| c. The welts or folded edges of any pocket, as applicable, overlap by more than 1/8 inch or open by more than 1/8 inch, when the slide fastener is closed | | X |
| d. Any facing of the front or of any leg opening short, tight, or twisted causing puckers or twisting of any opening | | X |
| e. Any leg end uneven in length, by more than 1/4 inch when the slide fastener is closed | | X |
| f. Movement of any slide fastener interfered with or scoops of any chain do not mesh or interlock | X | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects for the visual examination of the coveralls. (Continued)

| Defect | Major | Minor |
|---|---|---|
| g. Any slider not located at the specified position, when the slide fastener is closed (see Table II) | X | |
| h. Any not black chemically finished, finish missing, or not uniformly finished | | X |
| i. Any surface rough, misaligned, distorted, or contains any corrosion, scale, pit, dent, crack, nick, sliver, burr, or sharp edge | X | |
| j. Any front closure slider that has a tab pull longer than 3/4 inch. | X | |
| FASTENER TAPE | | |
| a. 10 to 25 percent of the hooks or pile flattened or missing from any tape | | X |
| b. 25 percent or more of the hooks or pile flattened or missing from any tape. | X | |
| c. Any not specified size | 2/ | |
| d. Any misplaced not serving the intended purpose | X | |
| e. Hook fastener tape attached to the flap of the knife pocket instead of to the coverall | | X |
| f. Any hook fastener tape attached to the flap instead of the pocket portion of any sleeve pencil pocket | | X |
| g. Any hook tape sewn to the coverall for attachment of the nameplate instead of pile tape | | X |
| SHADED PARTS | | |
| a. Any part shaded or any shade bar | | X |
| b. Color of any fibrous component not as specified or not uniform | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects for the visual examination of the coveralls. (Continued)

| Defect | Major | Minor |
|---|---|---|
| COMPONENTS AND ASSEMBLY | | |
| a. Any component not as specified or any defect of component or defect of assembly, not herein classified | 2/ | |
| b. Any component, component part, or required operation omitted, or any operation improperly performed, not herein classified | 2/ | |
| c. Any component part not cut in strict accordance with the patterns (see 3.4.1), not herein classified | 2/ | |
| d. Any dimension not as specified, not herein classified | 2/ | |
| SEAMS AND STITCHING | | |
| a. Accuracy of seaming: | | |
| 1. Any seam, hem, or attachment of any component twisted, puckered, or pleated; any part of the coverall or of any component caught in an unrelated operation or stitching; any seam edge not properly forced out or contains any fold | | X |
| 2. Ends of stitching that are not caught in other seams or stitching | | |
| (a) Any not securely backstitched | X | |
| (b) Any secure but backstitched for a distance less than 1/2 inch or the backstitching is not overlapped on itself | | X |
| 3. Thread breaks: | | |
| (a) Any not securely overstitched | X | |
| (b) Any secure but overstitched for a distance less than one inch | | X |
| 4. Ends of any armhole seam at the side seam, or ends of any leg inseam at the crotch, staggered by 1/2 inch or more | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects for the visual examination of the coveralls. (Continued)

| Defect | Major | Minor |
|---|---|---|
| b. Gage of stitching 3/: | | |
| 1. Any stitching irregular, unevenly or not gaged as specified, or not uniform | | X |
| c. Open seams 4/: | | |
| 1. Other than on any hem: | | |
| (a) Any more than 1/8 inch but not more than 1/4 inch | | X |
| (b) Any more than 1/4 inch | X | |
| 2. On any hem: | | |
| (a) Any more than 1/4 inch but not more than 1/2 inch | | X |
| (b) Any more than 1/2 inch | X | |
| d. Raw edges 5/: | | |
| 1. Outerside of the coverall: | | |
| (a) Any more than 1/4 inch but not more than 1/2 inch | | X |
| (b) Any more than 1/2 inch | X | |
| 2. On innerside of the coverall, raw edges of lining fabric not finished properly | | |
| (a) Any more than 1/2 inch but not more than one inch | | X |
| (b) Any more than one inch | X | |
| e. Seam and stitch type: | | |
| 1. Not specified seam or stitch type | 2/ | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects for the visual examination of the coveralls. (Continued)

| Defect | Major | Minor |
|---|---|---|
| f. Stitch tension: | | |
| 1. Any loose stitching 6/ | 2/ | |
| 2. Any tight stitching, resulting in breakage of the stitches, when normal pull is applied 7/ | X | |
| g. Stitches per inch 8/: | | |
| 1. Stitches more or less than specified: | | |
| (a) Coverall (excluding the label): | | |
| (1) One or 2 | | X |
| (2) more than 2 | X | |
| (b) Label: | | |
| (1) One to 3 | | X |
| (2) More than 3 | X | |
| h. Bartack and sewn eyelet: | | |
| 1. Missing or contains any skipped or broken stitches | X | |
| 2. Stitches more or less than specified: | | |
| (a) One to three | | X |
| (b) Four or more | X | |
| DETAILED DEFECTS APPLICABLE TO SPECIFIC PARTS OF THE COVERALL | | |
| COLLAR | | |
| a. Upper collar or under collar twisted; any collar edge curled; or any collar end not securely tacked to the coverall | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects for the visual examination of the coveralls. (Continued)

| Defect | Major | Minor |
|---|---|---|
| b. Any edge crooked, undercollar edge exposed, or any corner not uniform in shape | | X |
| c. Off center: | | |
| 1. More than 1/4 inch but not more than 1/2 inch | | X |
| 2. More than 1/2 inch | X | |
| d. Rounded corners uneven in length: | | |
| 1. More than 1/4 inch but not more than 3/8 inch | | X |
| 2. More than 3/8 inch | X | |
| e. Interlining: | | |
| 1. Pleated affecting smoothness of the undercollar | | X |
| 2. Tight or twisted causing puckers on the upper collar | | X |
| f. Trim: | | |
| 1. Missing or not securely attached | | X |
| 2. Exposed width less than 1/8 inch or more than 3/16 inch | | X |
| g. Neck closure strap and buttons: | | |
| 1. Missing or not securely attached | X | |
| 2. Sewn through upper collar | X | |
| FRONT OPENING | | |
| a. Fronts uneven in length at the neck, when the slide fastener is closed: | | |
| 1. More than 1/8 inch but not more than 1/4 inch | | X |
| 2. More than 1/4 inch | X | |
| b. Distance from the collar seam to each top stop on the slide fastener, less than 1/4 inch or more than 1/2 inch | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects for the visual examination of the coveralls. (Continued)

| Defect | Major | Minor |
|---|---|---|
| POCKETS | | |
| a. Any pocket out of designated alignment: | | |
| 1. More than 3/8 inch but not more than 1/2 inch | | X |
| 2. More than 1/2 inch | X | |
| b. Any not of uniform size and shape | | X |
| c. Pocket welts not of required width, less than 5/16 or more than 7/16 inch | | X |
| d. Opening in any cigarette pocket not on the side toward the front opening | X | |
| e. Multiple pencil pocket: | | |
| 1. One pencil compartment missing | | X |
| 2. Two or more pencil compartments missing | X | |
| EPAULETS | | |
| a. Any not left open at armhole seam or at break in stitching on long edges (See Figure 20) | | X |
| b. Any not trimmed as required | | X |
| SLEEVES | | |
| a. Right sleeve in the left armhole or left sleeve in the right armhole or any sleeve, in its proper armhole, installed in a reverse position | X | |
| b. Any pleats at any armhole seam or any tightness at any armhole seam causing puckers on any front or back | | X |
| c. Any sleeve lapped on top of any front or the back at any armhole | | X |
| d. Any variation in the length, between the left and right sleeve inseams, by more than 1/2 inch | X | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects for the visual examination of the coveralls. (Continued)

| Defect | Major | Minor |
|---|---|---|
| HANGER | | |
| a. Missing or not fabricated as specified | | X |
| b. Any end not caught securely in the collar seam stitching | | X |
| c. Misplaced, off center of the back by more than 1/2 inch | | X |
| d. Loop is less than 1-1/2 inches or more than 1-3/4 inches in length | | X |
| LEGS | | |
| a. Any variation in the length, between the left and right leg inseams, by more than 1/2 inch | X | |
| LABEL | | |
| a. Size missing, incorrect or illegible | X | |
| b. Other than the size information, incomplete, incorrect, or illegible | | X |
| c. Misplaced, off center of the back by more than 1/2 inch | | X |
| d. Stitching omitted on one or more edges | | X |
| e. Size of label not as specified | | X |

1/ Each slide fastener shall be checked for proper function by opening and closing each slide fastener at least three times along its full length. The function of the automatic lock on each slider of each slide fastener shall be checked by stopping the slider at any point on the chain. Normal tension shall be applied to the slider to determine if the lock prevents further separation of the chain. The coverall that contains any slide fastener that does not function properly shall be rejected.

2/ The defect shall be classified as a major defect, when it seriously affects the serviceability or appearance, otherwise it shall be classified as a minor defect.

3/ The gage of stitching defect shall be scored only, when the condition exists for more than 2 inches on any row of stitching.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

4/ A seam shall be classified as open, when one or more stitches, joining a seam, are broken or when two or more continuous skipped stitches or run-offs occur. On double stitched seams, a seam shall be classified as open, when either one or both sides of the seam contain any of the aforementioned for a single stitched seam.

5/ Any edge that should be turned under and is not, but is securely caught in the stitching, shall be classified as a raw edge. Any raw edge, that is not securely caught in the stitching, shall be classified as an open seam.

6/ A seam shall be classified as loose, when the top and bobbin threads are on the same surface.

7/ Puckering is evidence of tight tension or gathering of the material. When puckering is evident and is not caused by the gathering of the material, the stitching shall be inspected for tight tension and breaking of stitches by exerting normal pull in the lengthwise direction of the stitching, by pulling the material taut to straighten out the seam. Puckering due to the gathering of the material shall be classified as an accurancy of seaming defect.

8/ The stitches per inch defect shall be scored only, when the condition exists for more than 3 inches on any row of stitching.

TABLE V. List of defects for packaging.

| Item | Defect |
|---|---|
| Exterior and interior markings | Missing, incorrect, incomplete, or illegible; of improper size, location, sequence, or method of application; size shown on any exterior container and on the paper label in the polyethylene bag not the same; information on the paper label in the polyethylene bag not readable through the film or no label in the polyethylene bag. |
| Materials | Any non-conforming component; any component or component part missing, damaged, or otherwise defective. |
| Workmanship | Inadequate application of the components such as incomplete closure of any exterior container, container flap, or loose strapping; bulging or distortion of any container; any shipping container contains any metal fastening or stitches; any polyethylene bag damaged, any vent hole missing, or any open or non-continuous heat sealed seam. |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

TABLE V. List of defects for preparation for delivery (continued).

| Item | Defect |
|---|---|
| Exterior and interior weight or content | Gross or net weight exceeds the requirement; number per container more or less than specified; more than one size coveralls in the same container without required labeling; any portion of the coverall caught in any heat sealed seam; any coverall distorted, deformed, or bent; any not individually packaged within the polyethylene bag. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

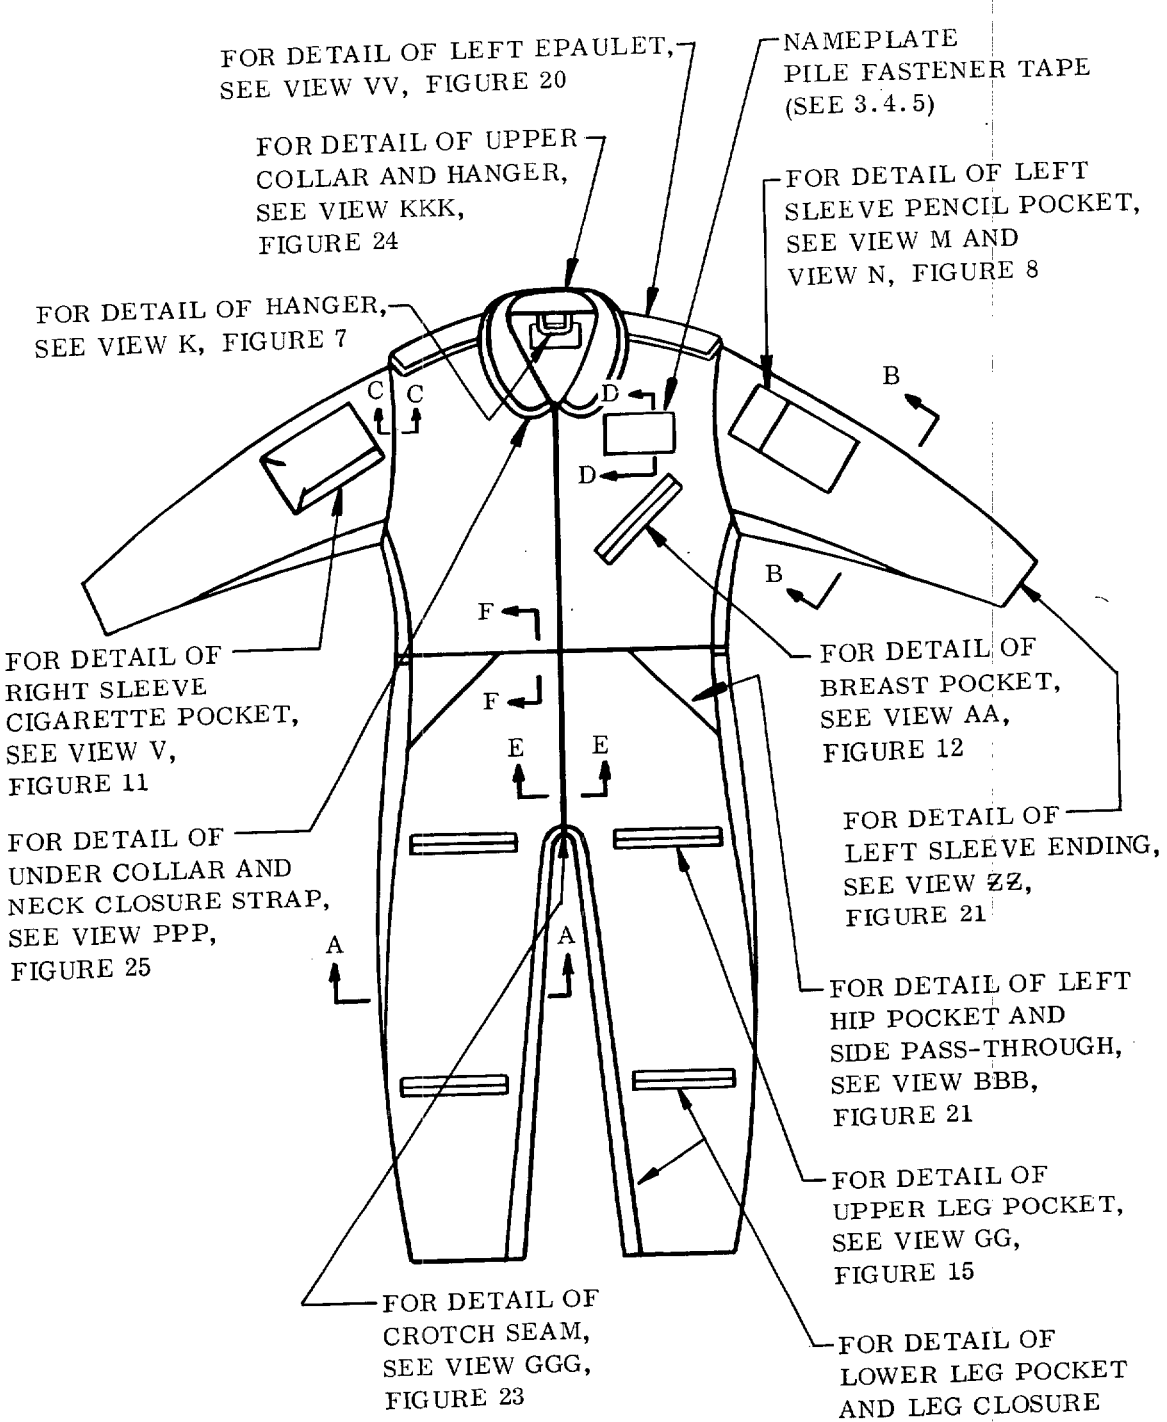



DIMENSIONS IN INCHES.

FOR SECTIONS A-A AND B-B, SEE FIGURE 4.
FOR SECTIONS C-C, D-D, E-E, AND F-F, SEE FIGURE 5.

FIGURE 1. FRONT (CWU-48/P)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

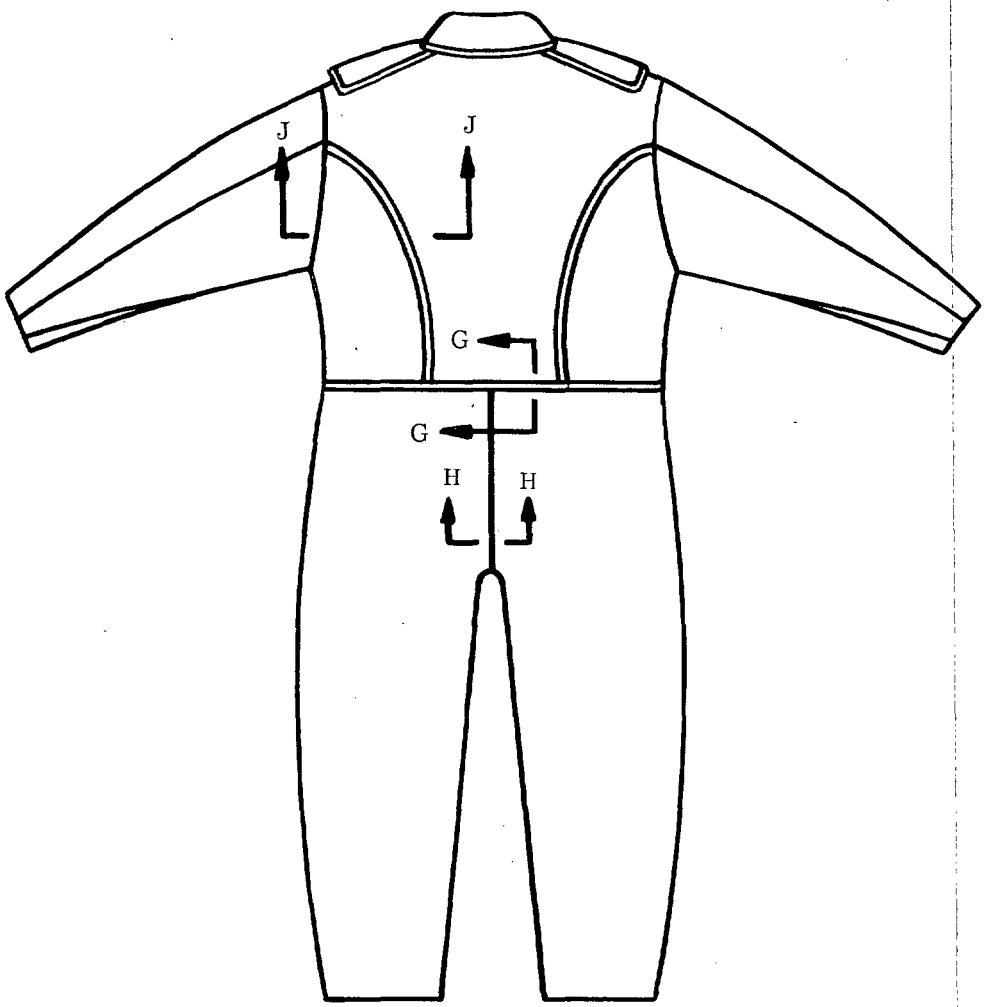



FOR SECTIONS G-G, H-H, AND J-J, SEE FIGURE 6.

FIGURE 2. BACK (CWU-48/P AND CWU-48A/P)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

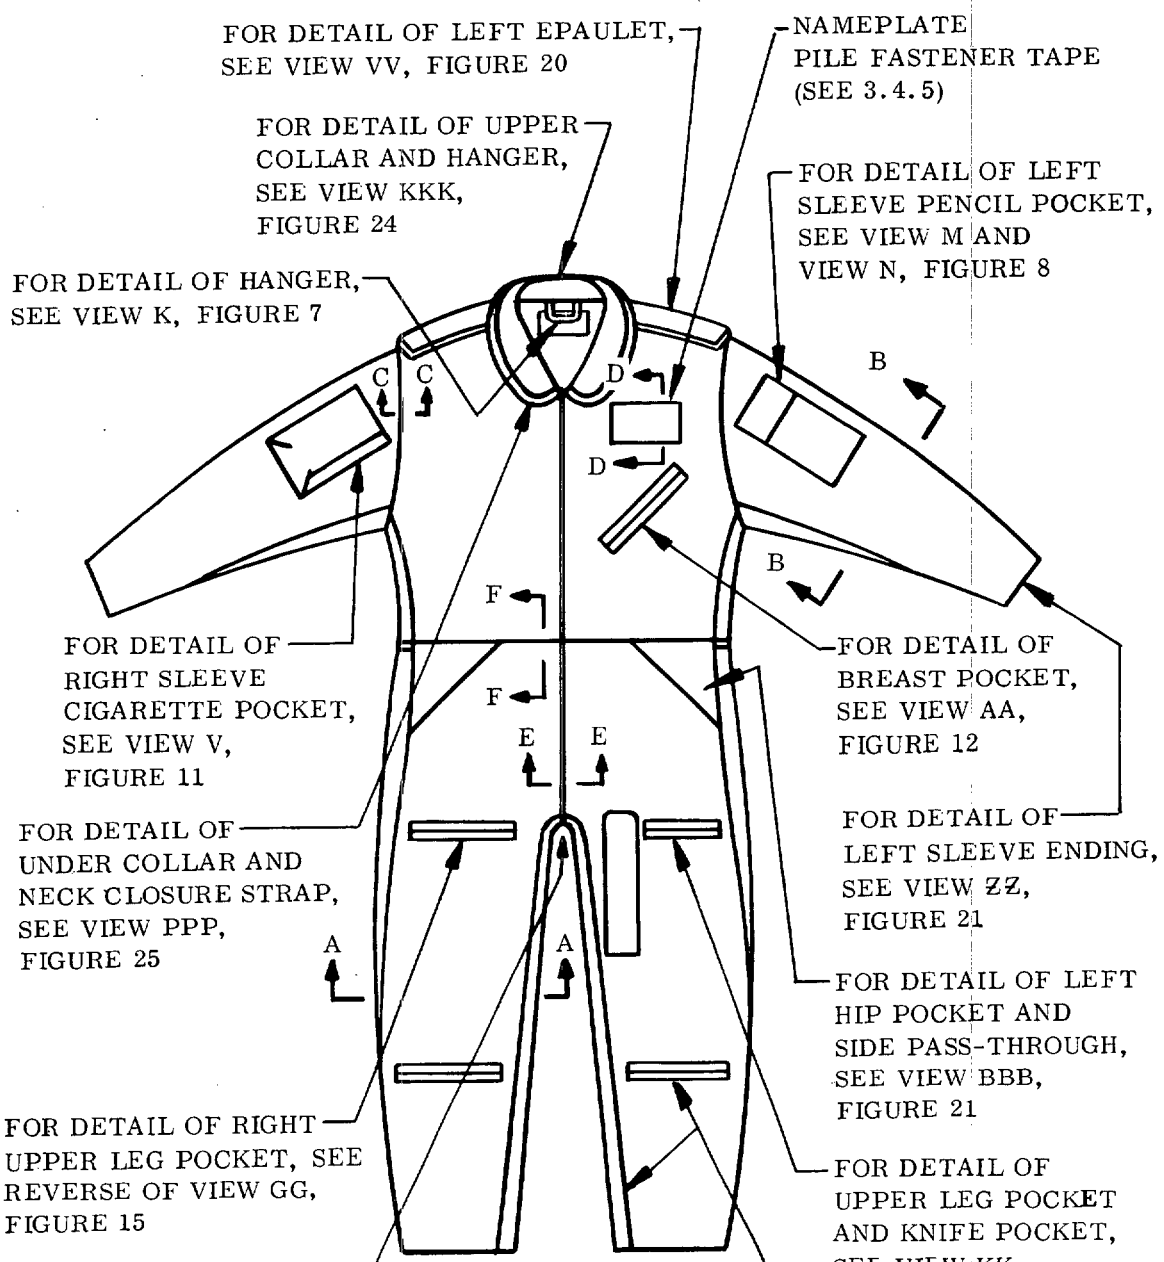



FOR SECTIONS A-A AND B-B, SEE FIGURE 4.
FOR SECTIONS C-C, D-D, E-E, AND F-F, SEE FIGURE 5.


FIGURE 3. FRONT (CWU-48A/P)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

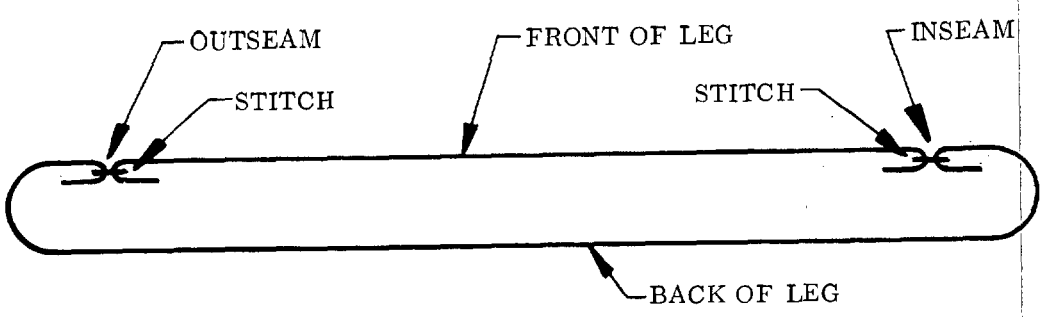


SECTION A - A

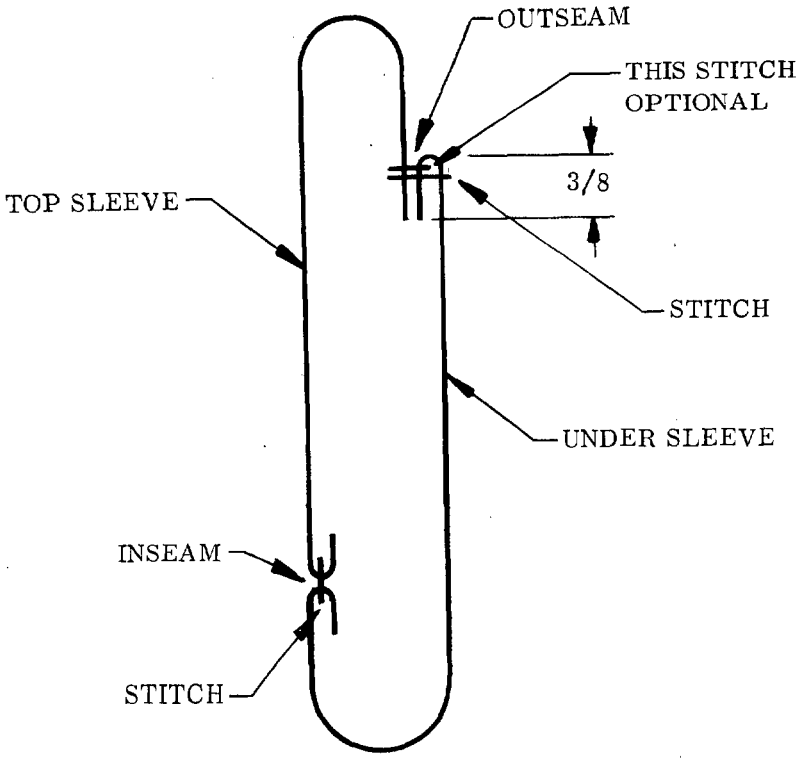


SECTION B - B


DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ON DIMENSIONS SHALL BE AS FOLLOWS:

| DIMENSIONS | TOLERANCES |
|---|---|
| 0 TO 1/2 INCL | ± 1/32 |
| OVER 1/2 TO 1 INCL | ± 1/16 |
| OVER 1 TO 6 INCL | ± 1/8 |
| OVER 6 TO 12 INCL | ± 1/4 |


FIGURE 4. COVERALL SECTIONS




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

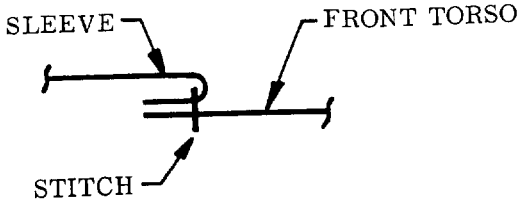



SECTION C - C

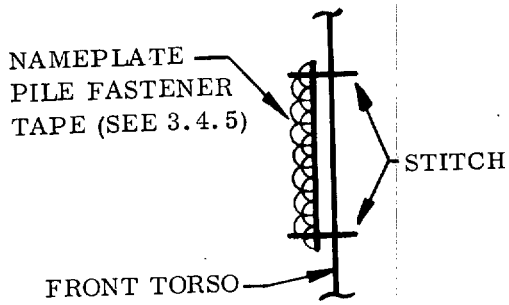


SECTION D - D

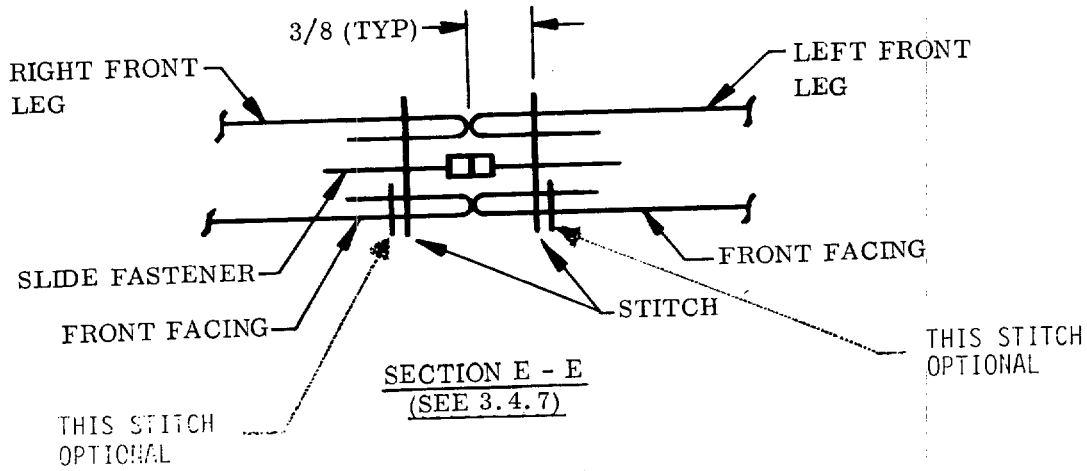


SECTION E - E
(SEE 3.4.7)

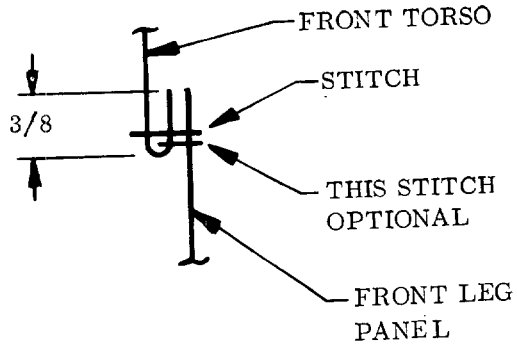



SECTION F - F


FIGURE 5. COVERALL SECTIONS




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

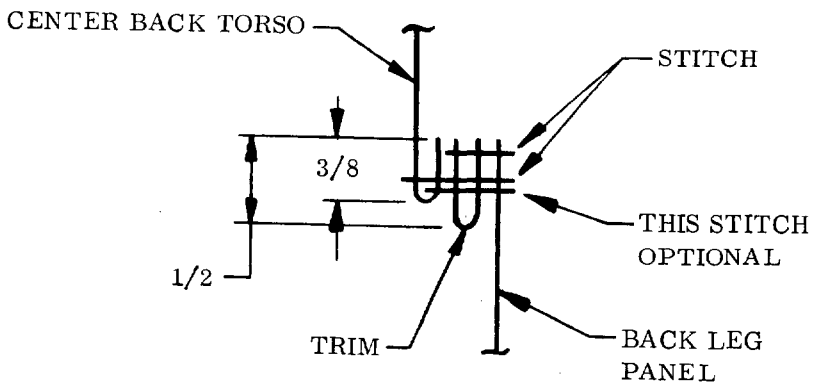


SECTION G - G

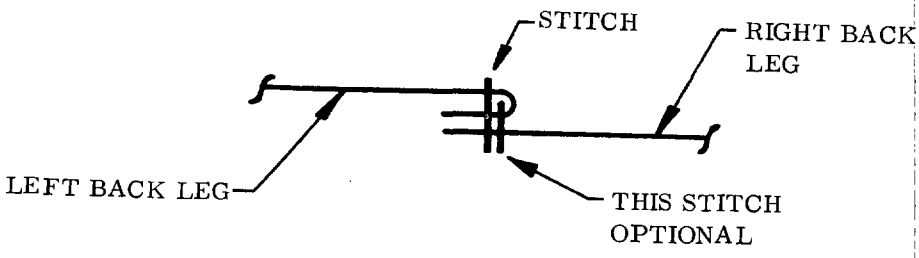


SECTION H - H

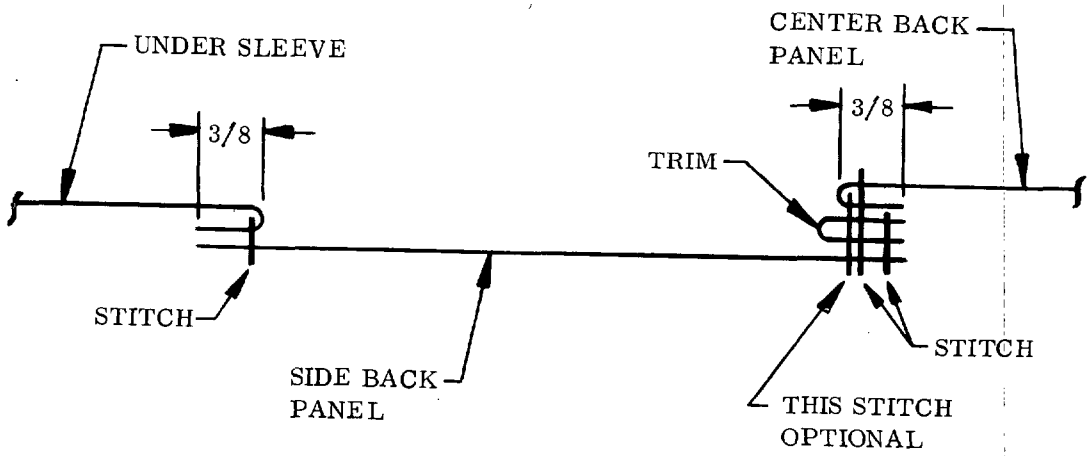



SECTION J - J


FIGURE 6. COVERALL SECTIONS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

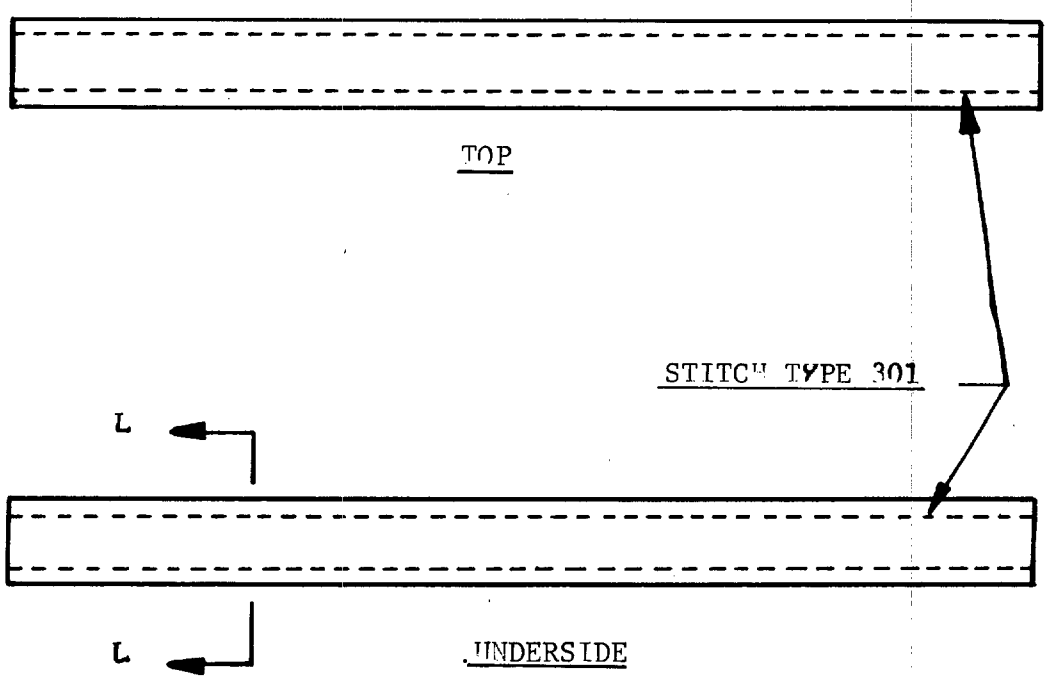


VIEW K
(HANGER)





SECTION L-L

FOR INFORMATION ON THE HANGER
SEE VIEW KKK FIGURE 24 and 3.4.4


FIGURE 7 HANGER SECTIONS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

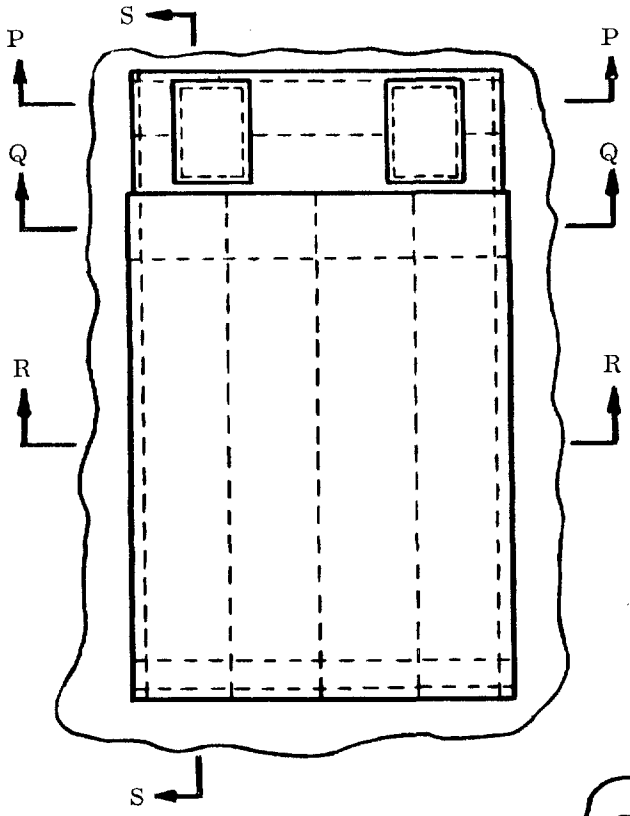


VIEW M
PENCIL POCKET
(LEFT SLEEVE)

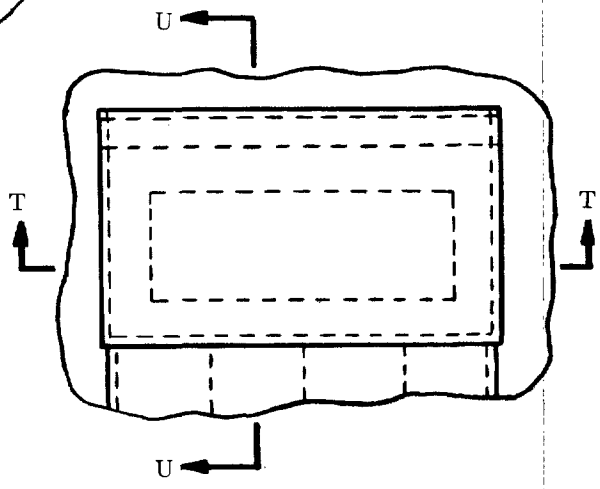



VIEW N
PENCIL POCKET FLAP
(LEFT SLEEVE)

FOR SECTIONS P-P, Q-Q, AND R-R, SEE FIGURE 9.
FOR SECTIONS S-S, T-T, AND U-U, SEE FIGURE 10.


FIGURE 8. PENCIL POCKET SECTIONS




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

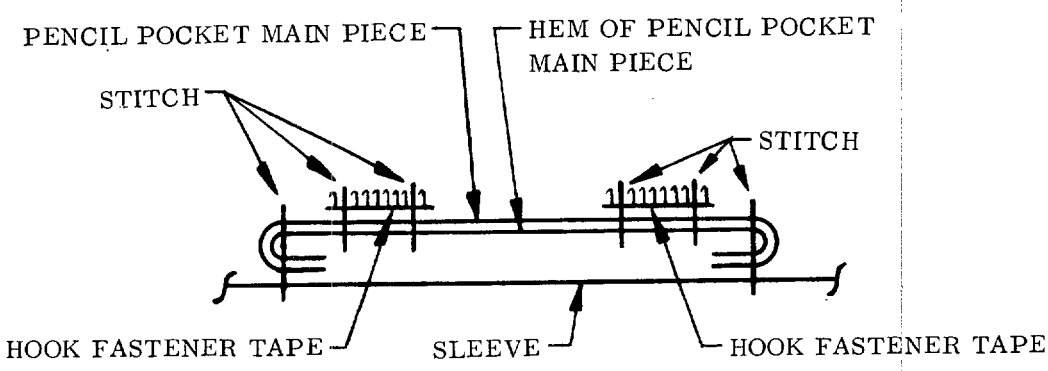


SECTION P-P

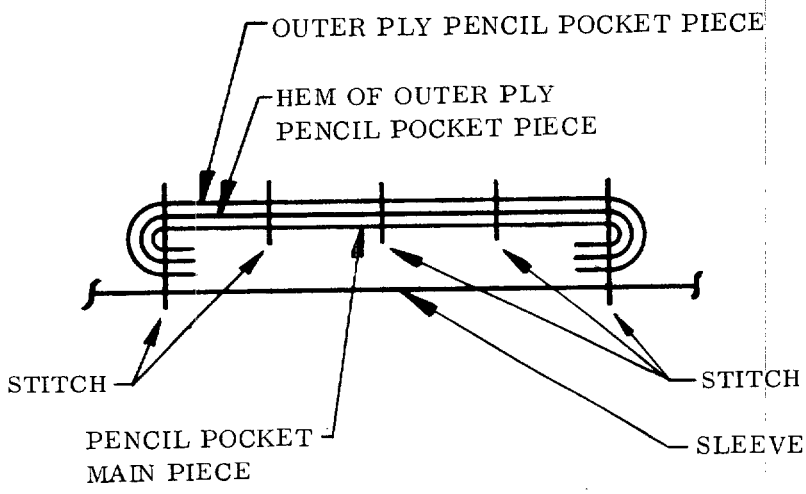


SECTION Q-Q

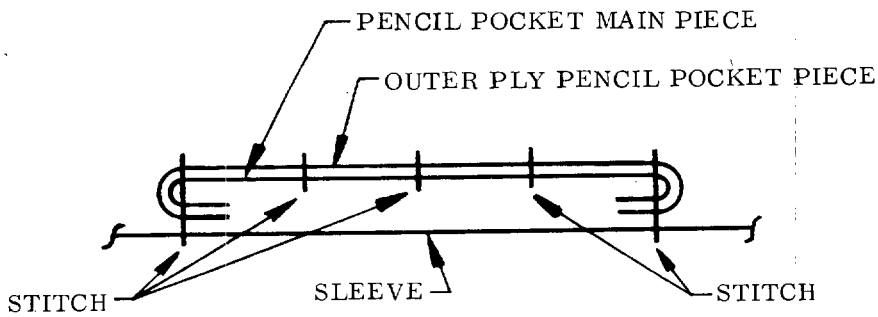



SECTION R-R


FIGURE 9. PENCIL POCKET SECTIONS




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

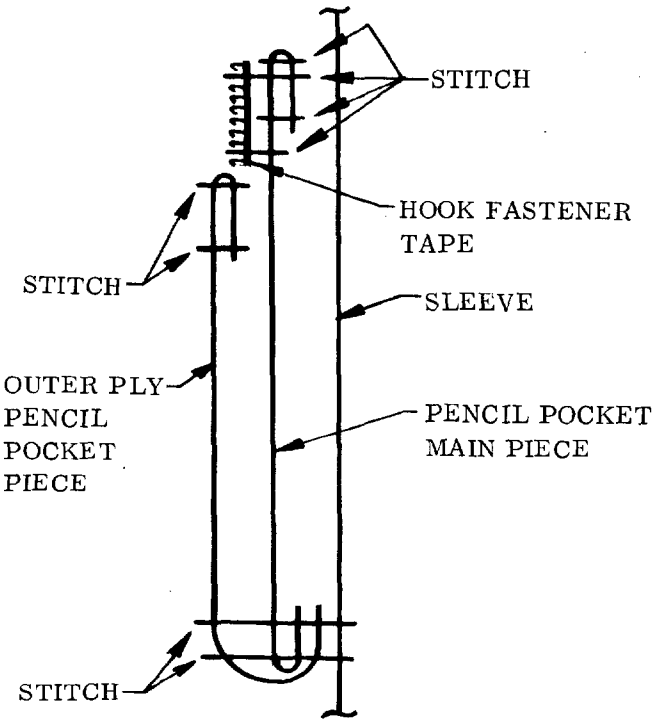


SECTION S-S

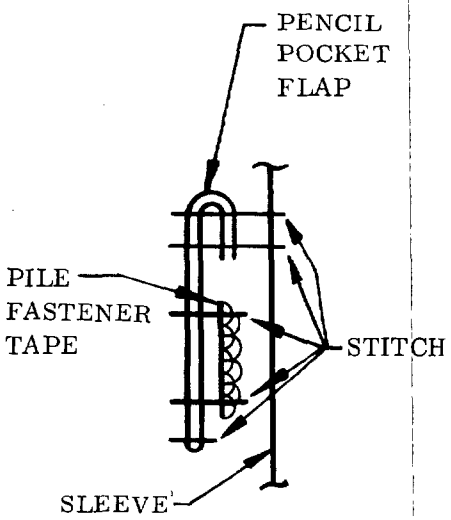


SECTION U-U

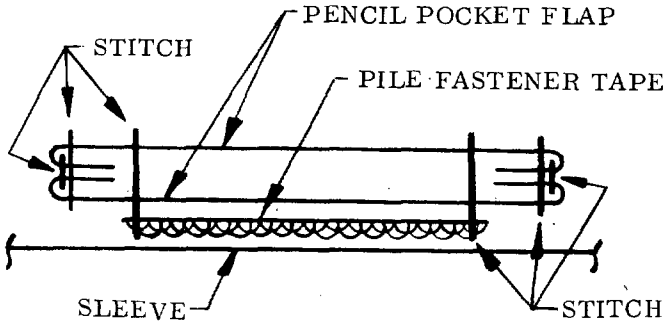



SECTION T-T

NOTE: SECTIONS T - T AND U - U SHOW ONLY FLAP AND SLEEVE LAYERS AND DON'T INCLUDE ANY POCKET SECTIONS THAT FALL UNDER THE FLAP

FIGURE 10. PENCIL POCKET SECTIONS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

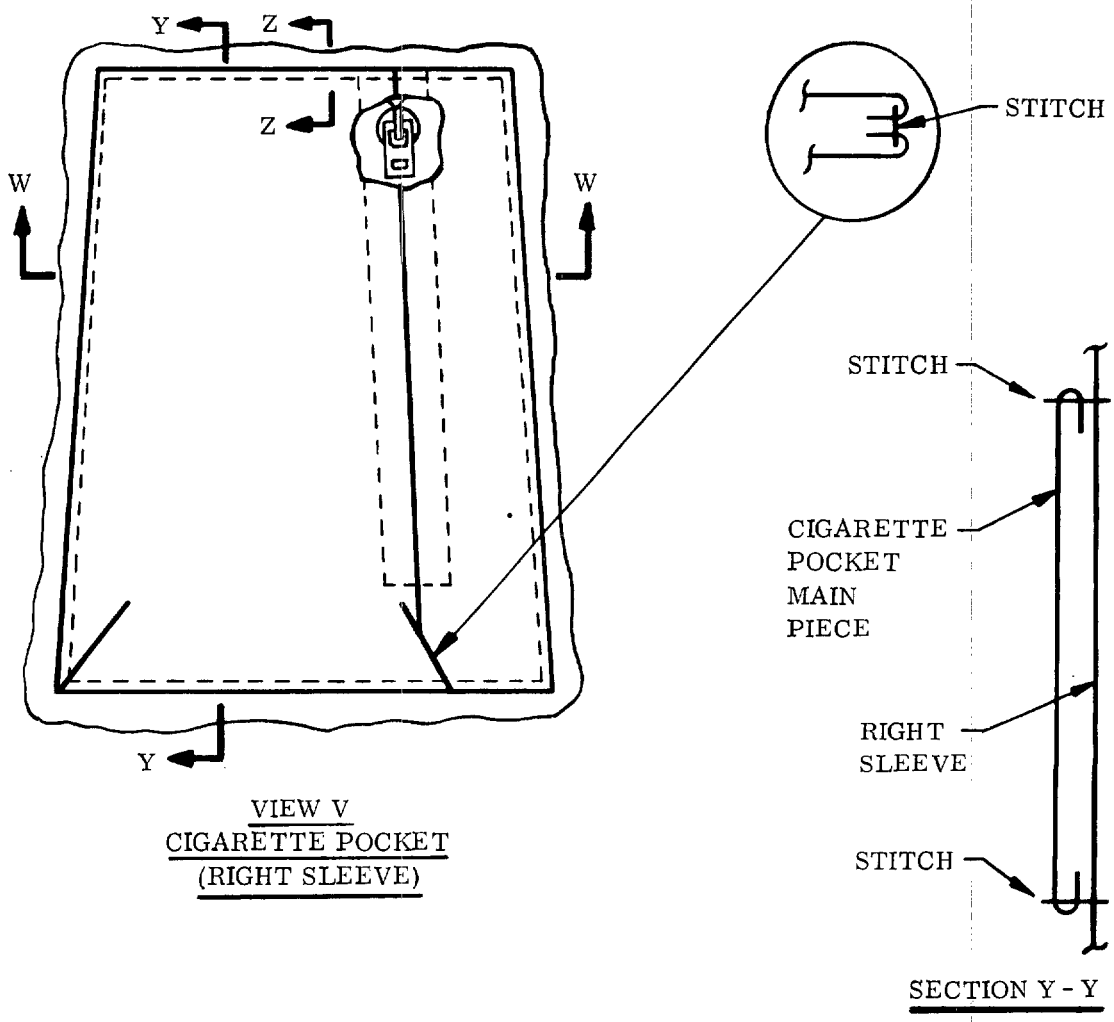


VIEW V
CIGARETTE POCKET
(RIGHT SLEEVE)

SECTION Y - Y


SECTION W - W

SECTION Z - Z

FIGURE 11. CIGARETTE POCKET SECTIONS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

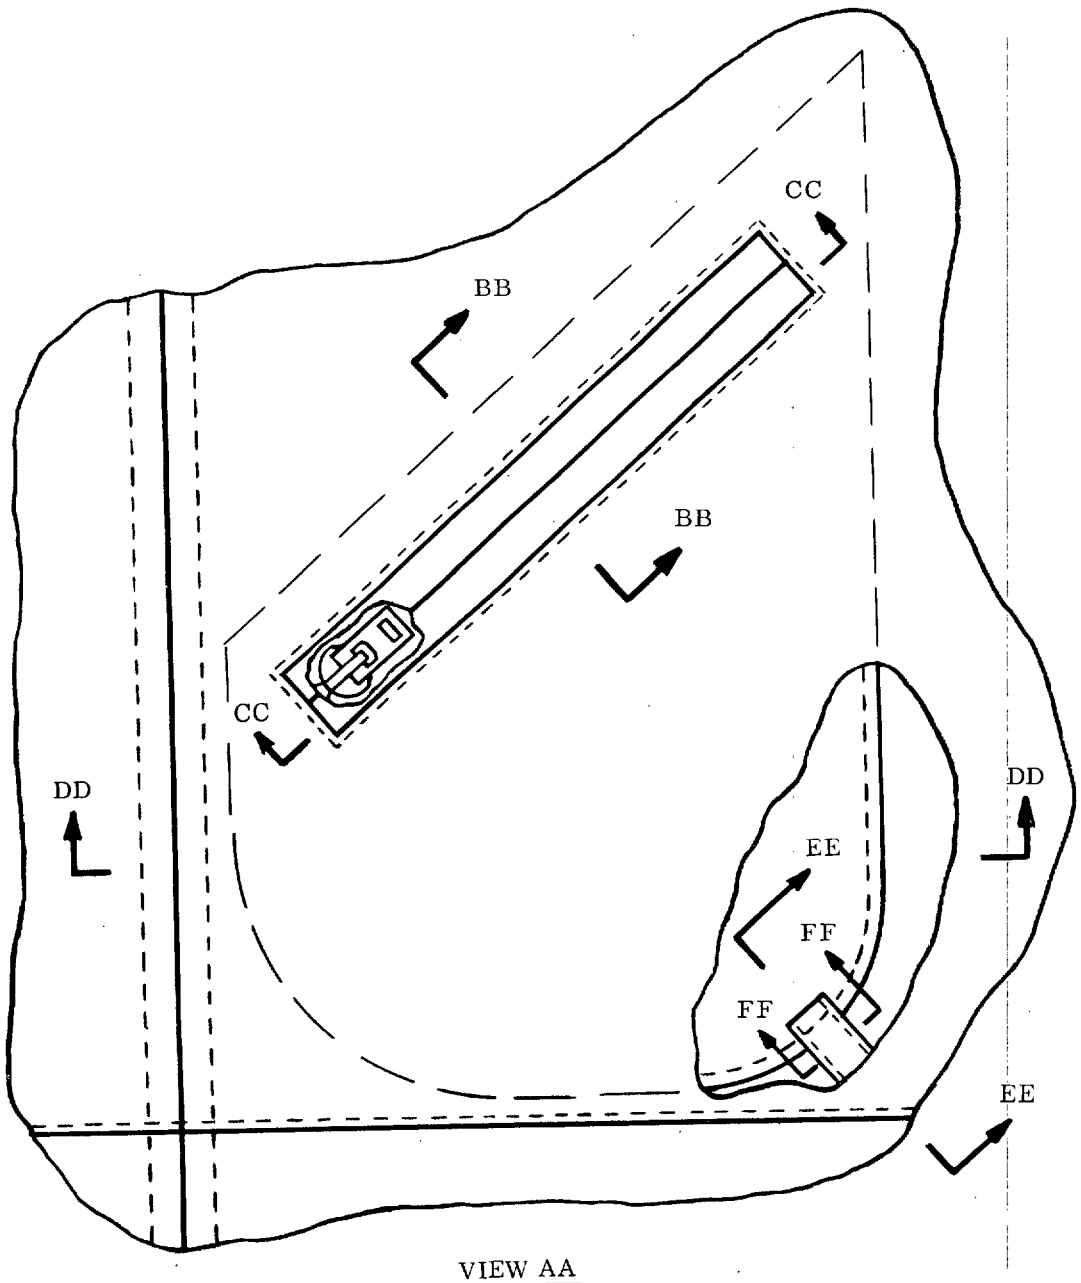



VIEW AA
BREAST POCKET

FOR SECTIONS BB - BB AND CC - CC, SEE FIGURE 13
FOR SECTIONS DD - DD, EE - EE, AND FF - FF, SEE FIGURE 14.


FIGURE 12. BREAST POCKET SECTIONS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

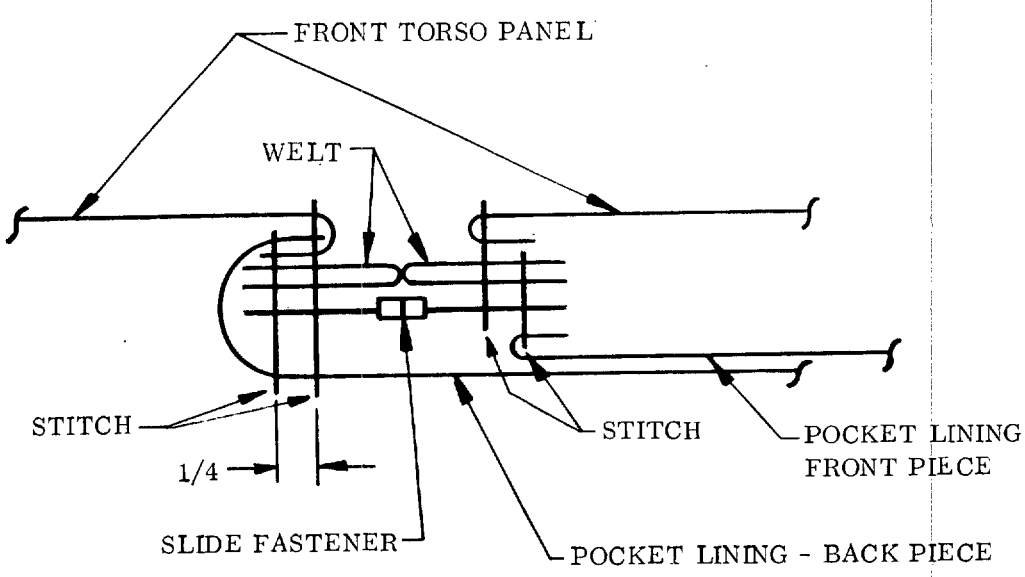


SECTION BB - BB

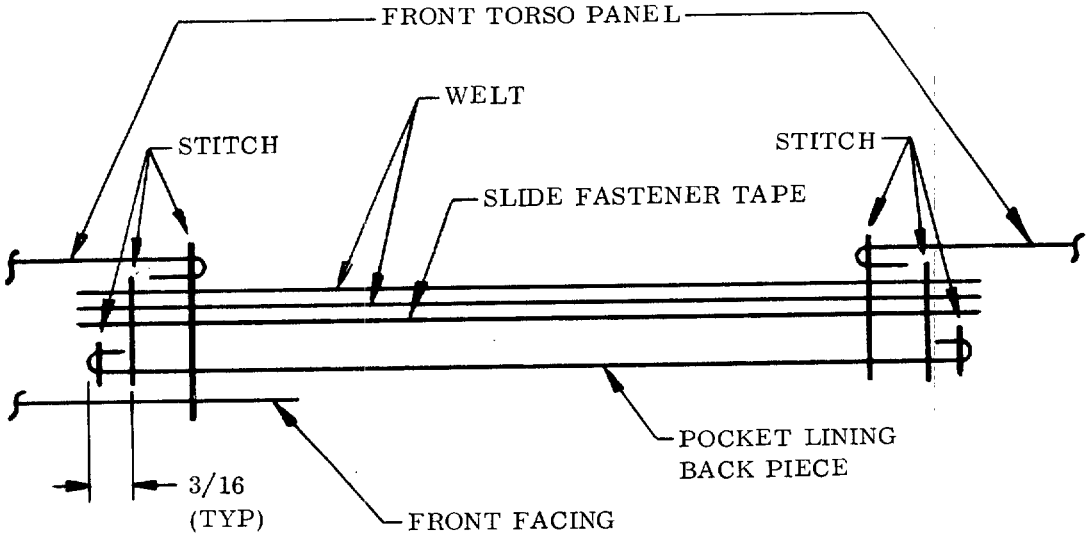



SECTION CC - CC


FIGURE 13. BREAST POCKET SECTIONS




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

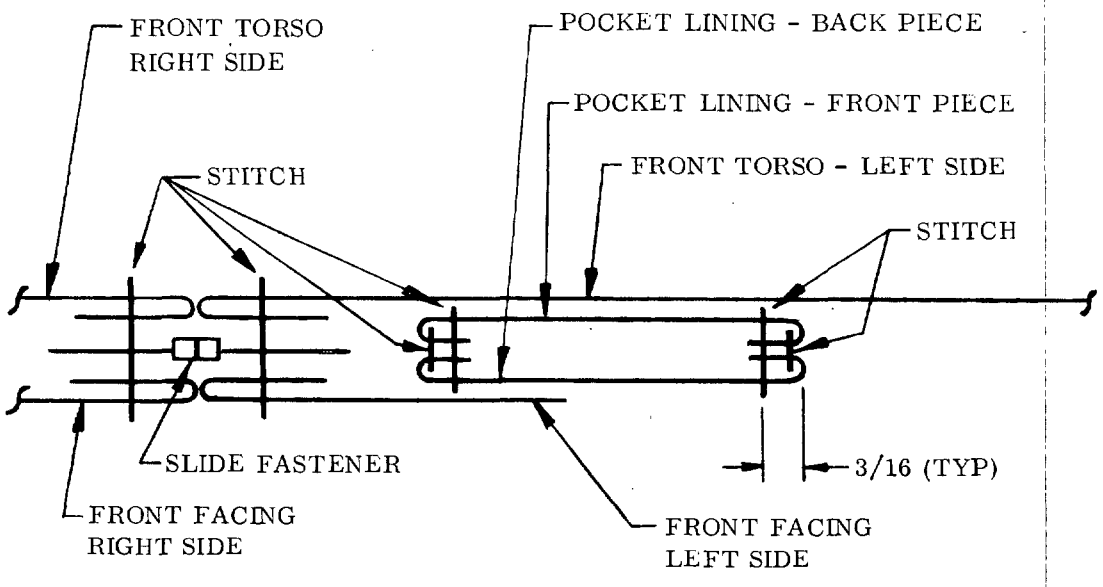


SECTION DD - DD

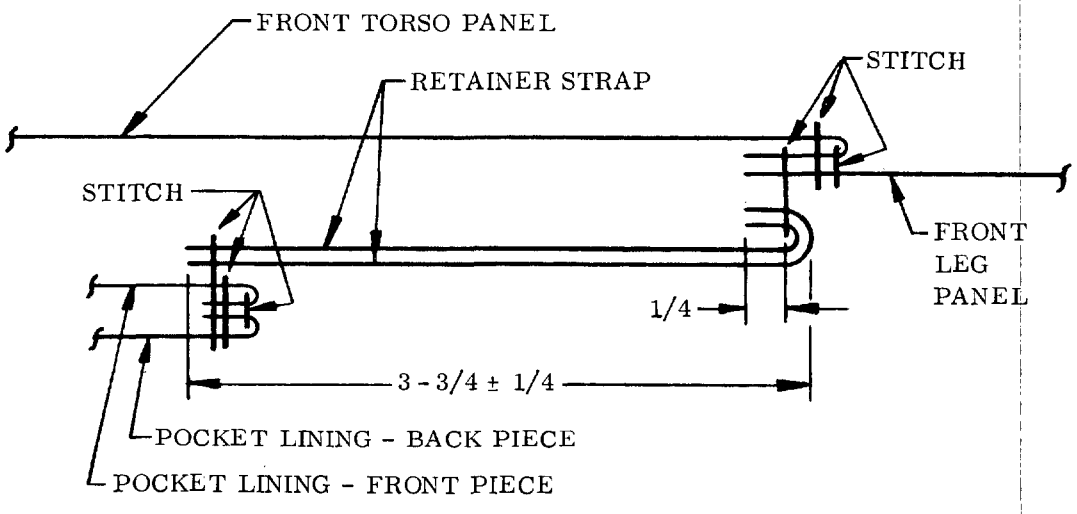


SECTION EE - EE

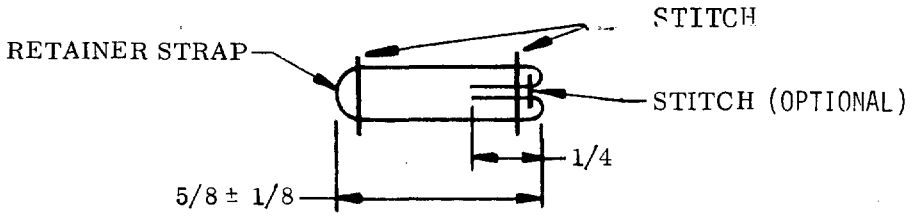


SECTION FF - FF

FIGURE 14. BREAST POCKET SECTIONS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.


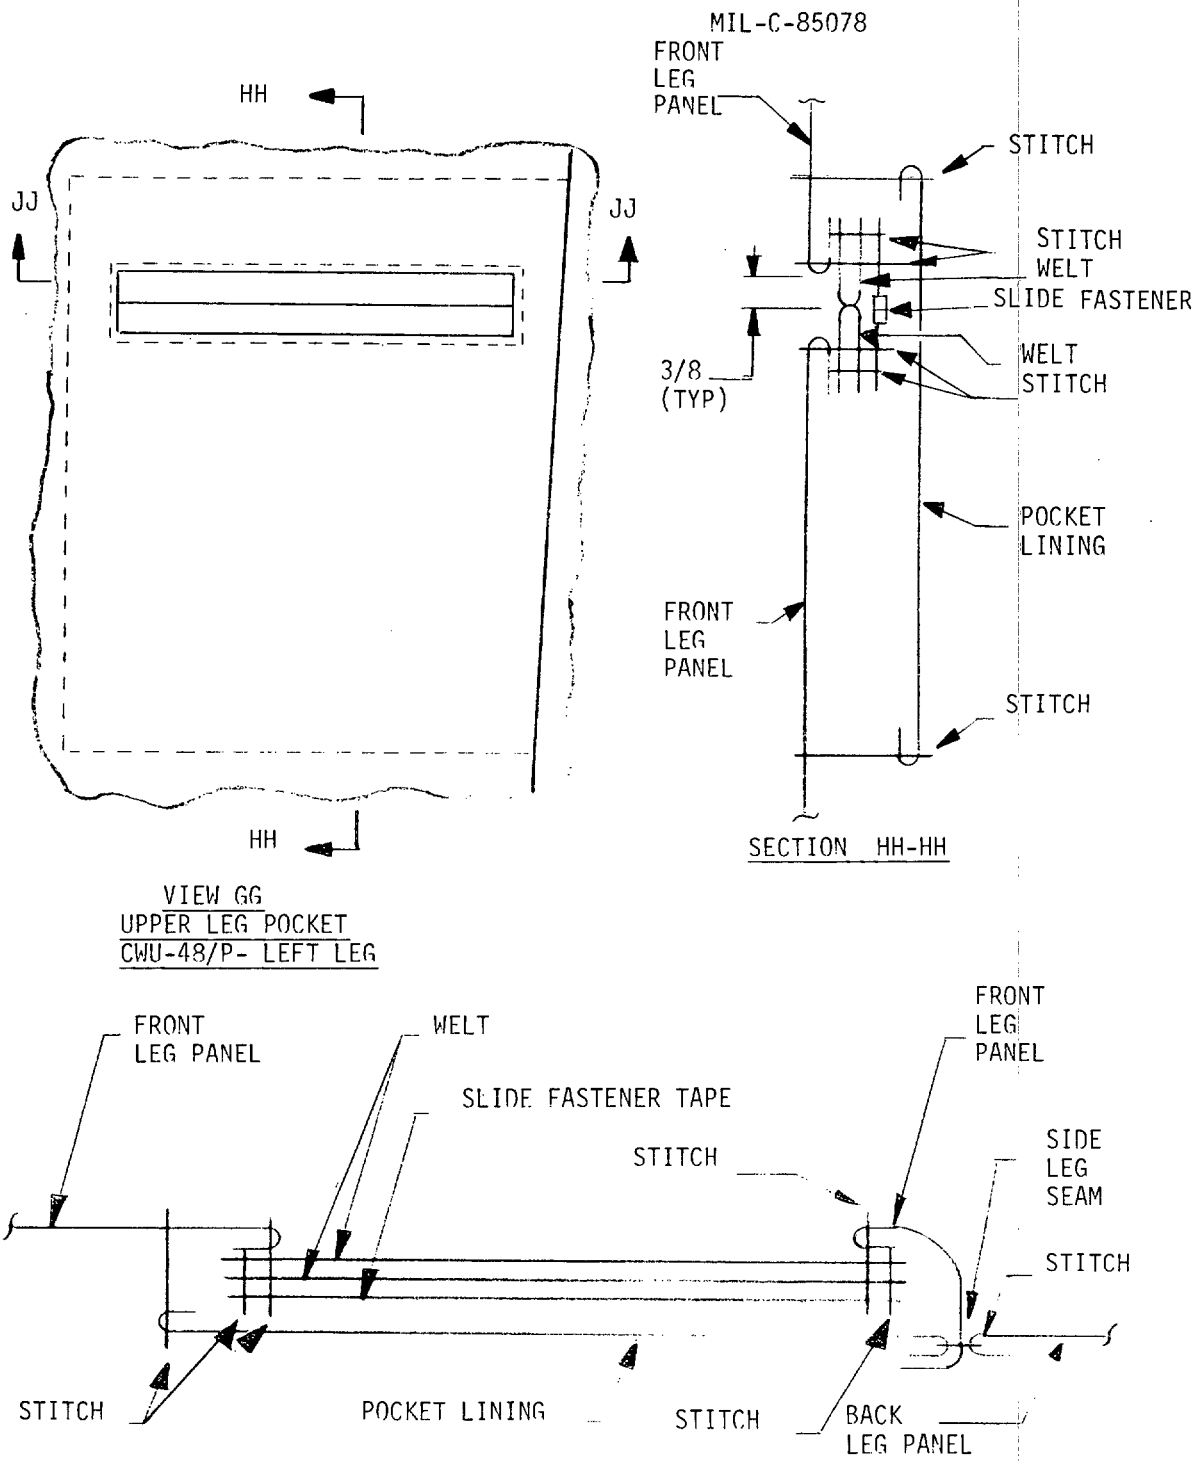



FIGURE 15. UPPER LEG POCKET SECTIONS
CWU-48/P



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

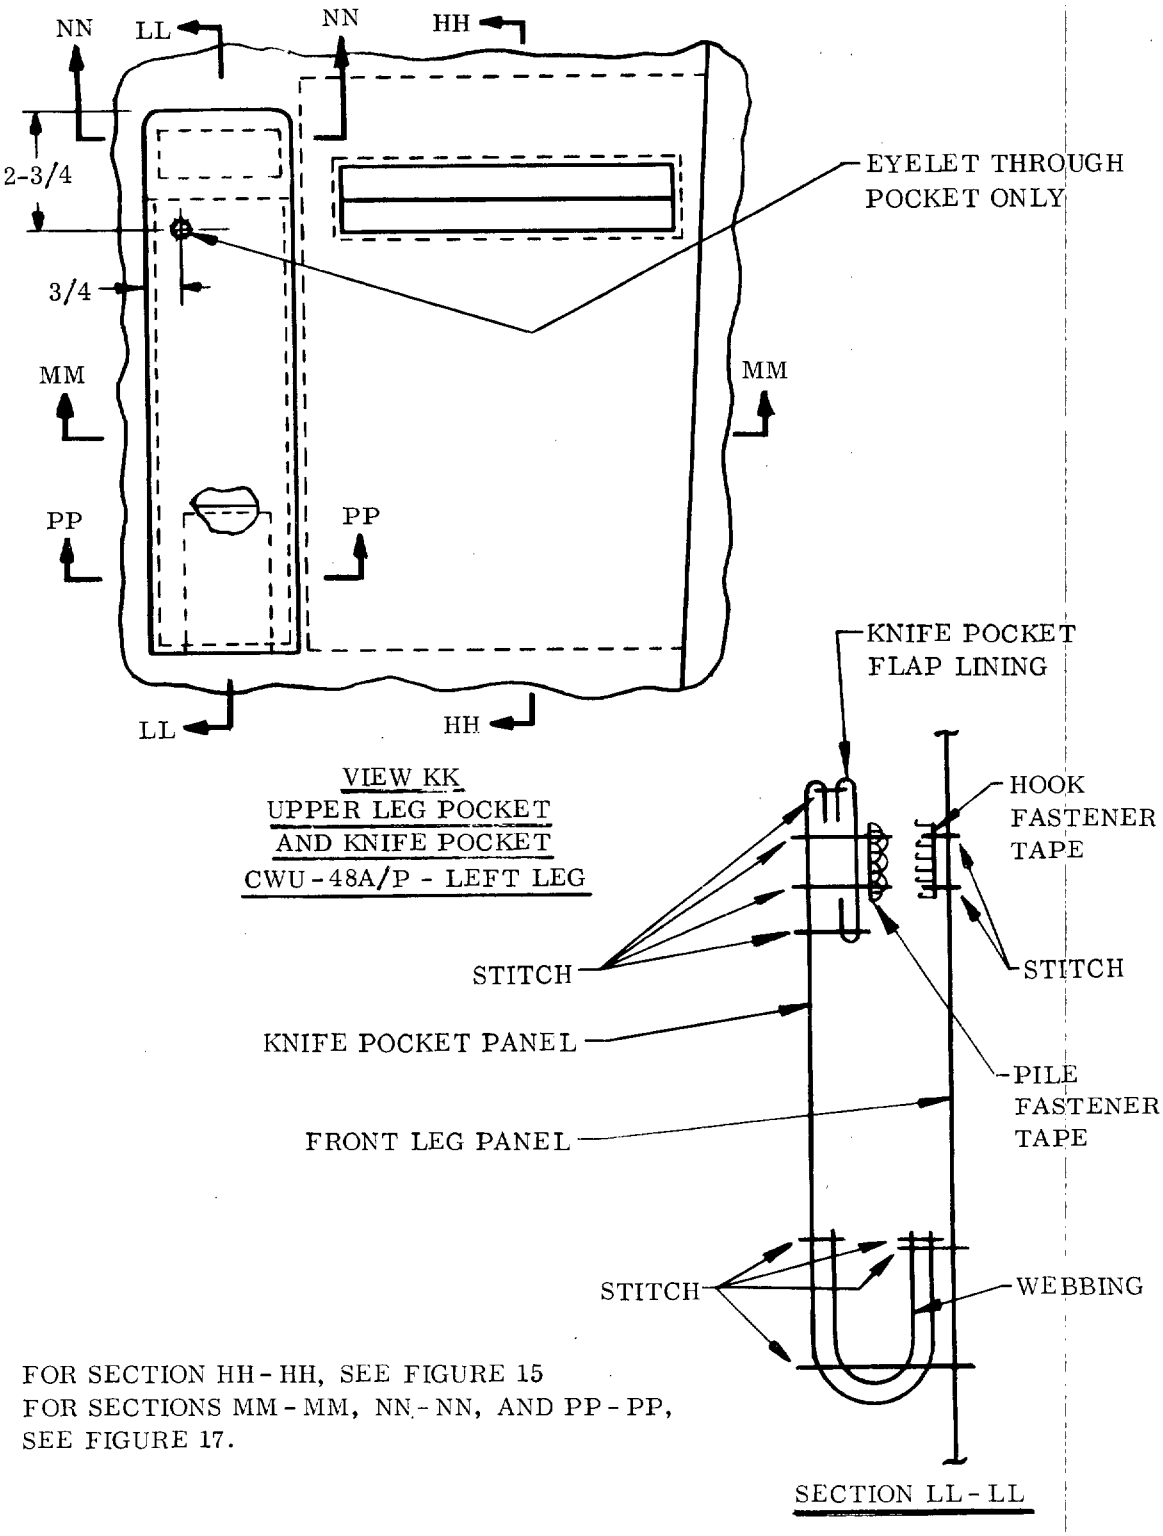


VIEW KK
UPPER LEG POCKET
AND KNIFE POCKET
CWU-48A/P - LEFT LEG


FOR SECTION HH-HH, SEE FIGURE 15
FOR SECTIONS MM-MM, NN-NN, AND PP-PP,
SEE FIGURE 17.

SECTION LL-LL


FIGURE 16. UPPER LEG, POCKET AND KNIFE POCKET SECTIONS
CWU-48A/P




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

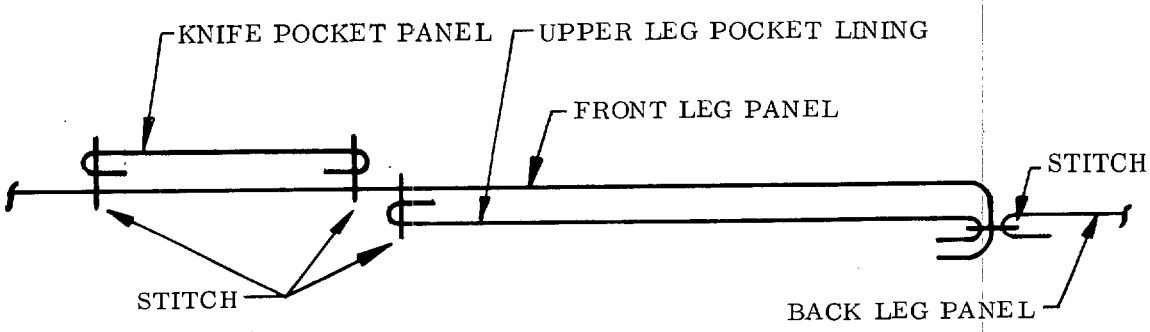


SECTION MM - MM

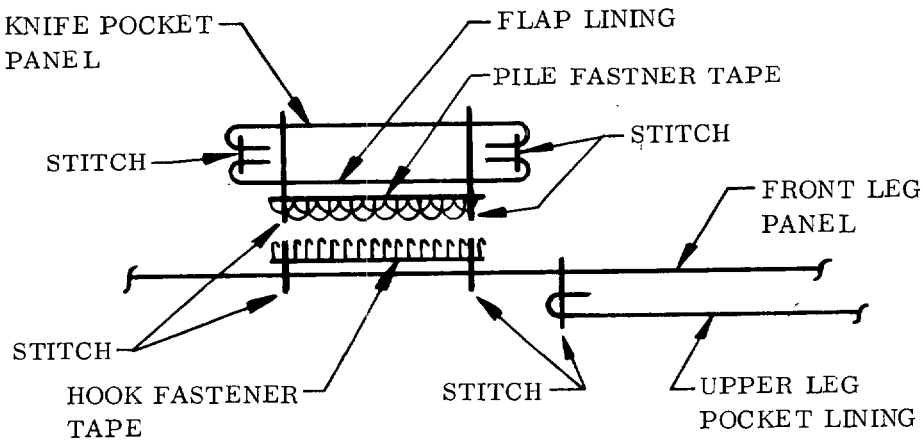


SECTION NN - NN

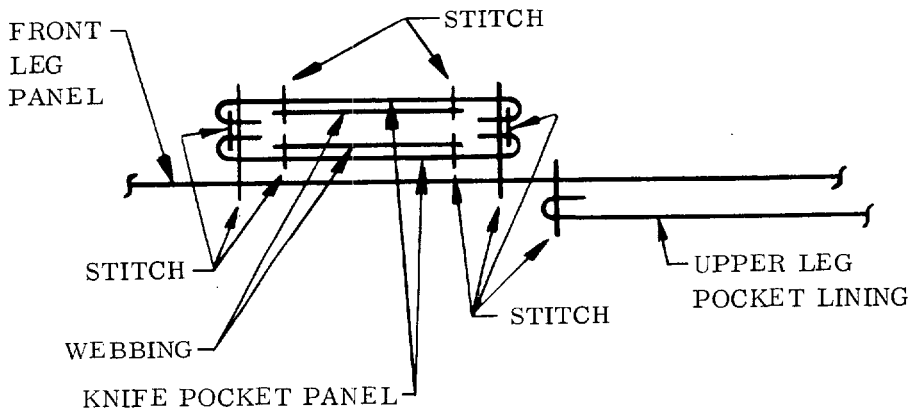



SECTION PP - PP

FIGURE 17. UPPER LEG POCKET AND KNIFE POCKET SECTIONS CWU - 48A/P



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

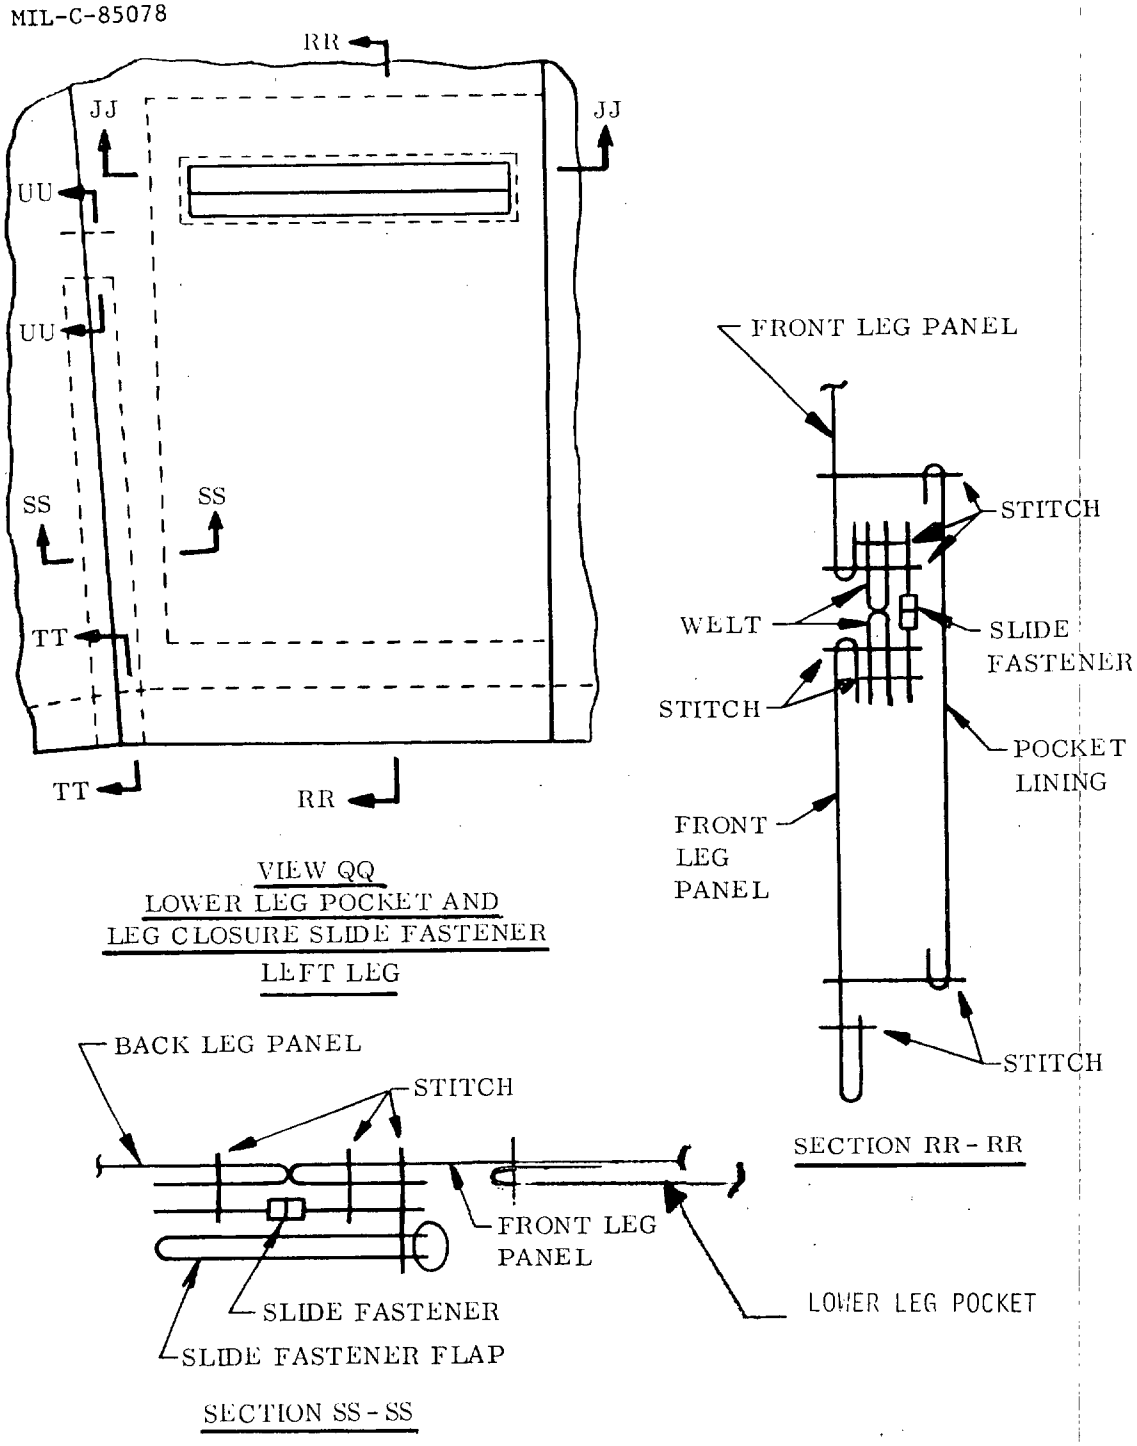



FOR SECTION JJ - JJ, SEE FIGURE 15.
FOR SECTIONS TT - TT AND UU - UU, SEE FIGURE 19.


FIGURE 18. LOWER LEG POCKET AND LEG CLOSURE SLIDE FASTENER SECTIONS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

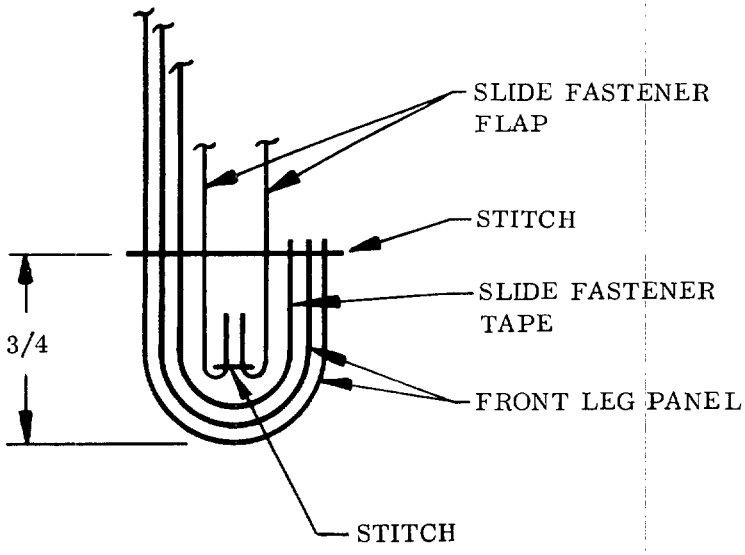


SECTION TT-TT

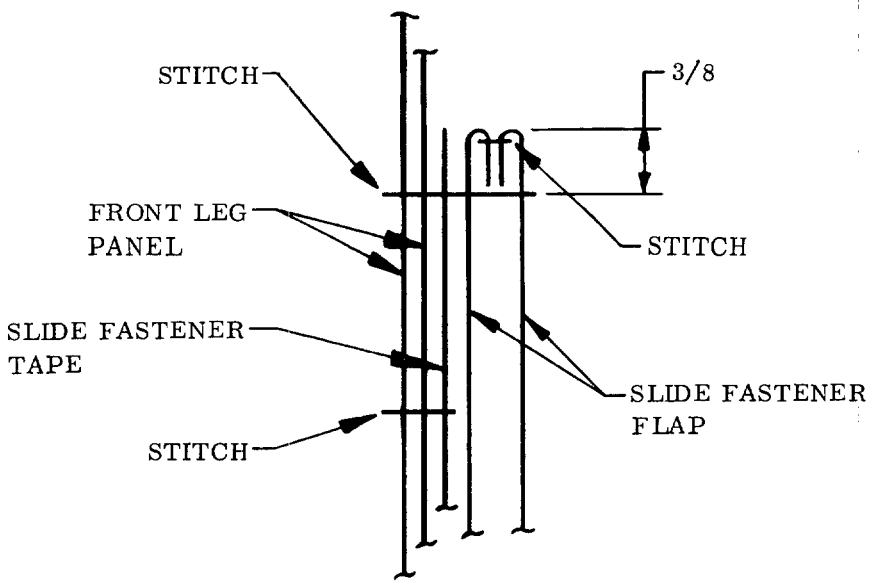



SECTION UU-UU


FIGURE 19. LOWER LEG POCKET AND LEG CLOSURE SLIDE FASTENER SECTIONS




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

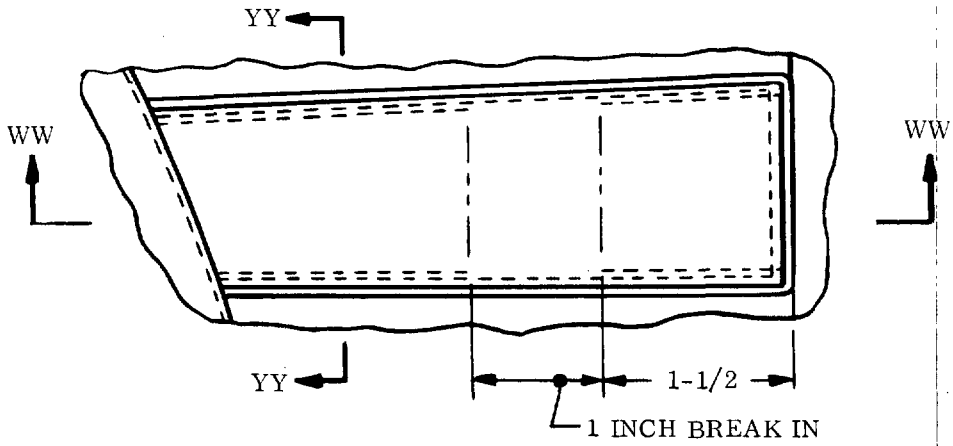


VIEW VV
LEFT EPAULET

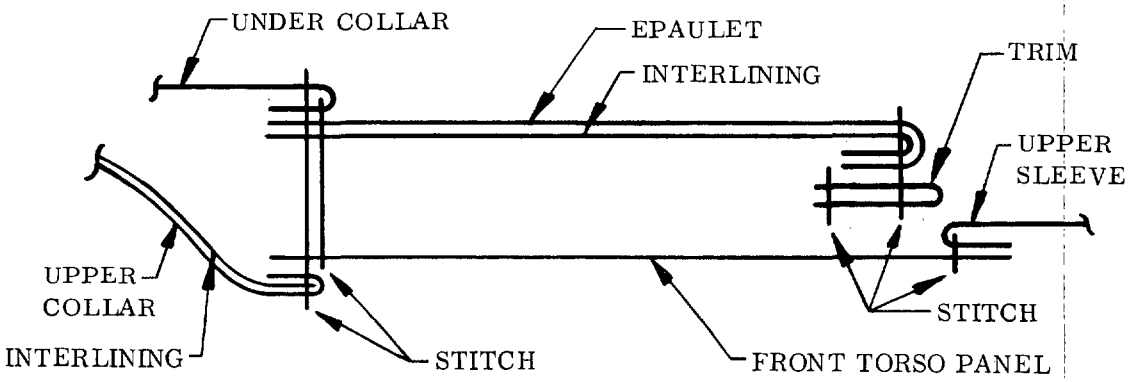


SECTION WW-WW

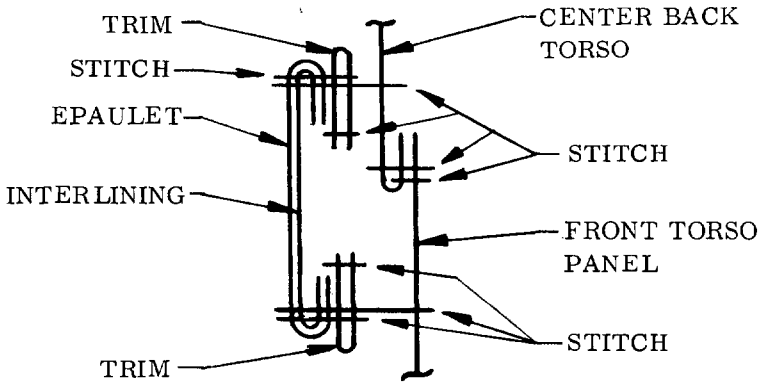



SECTION YY-YY

FIGURE 20. EPAULET SECTIONS




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

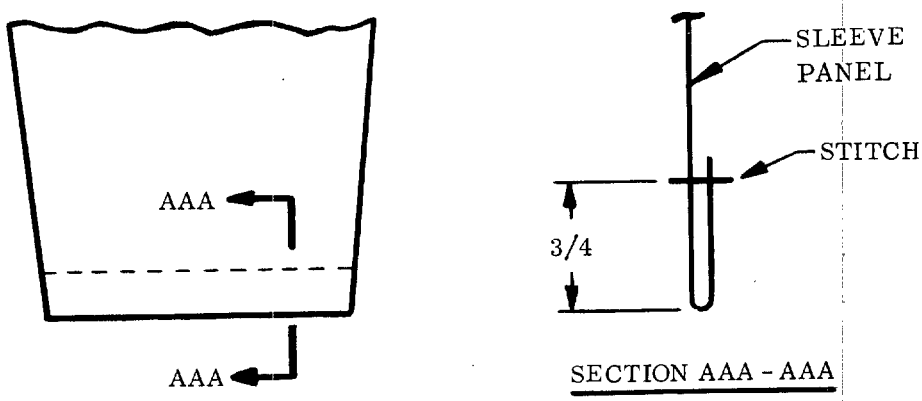


VIEW ZZ
SLEEVE ENDING

SECTION AAA - AAA

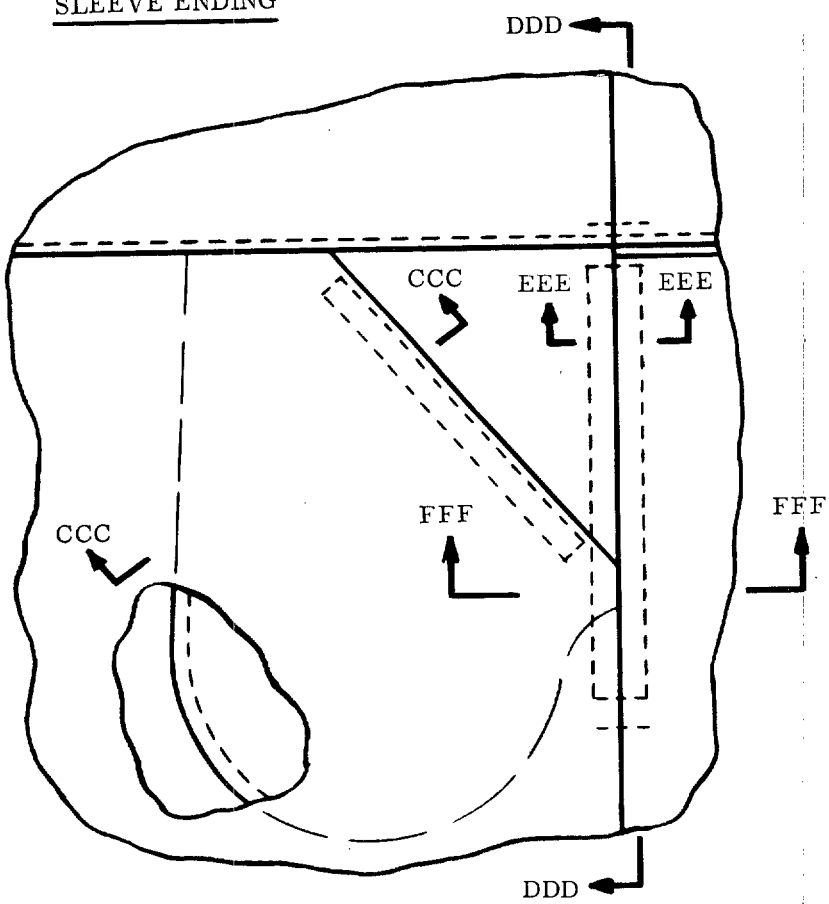



VIEW BBB
HIP POCKET AND SIDE PASS-THROUGH SECTIONS - LEFT SIDE

FOR SECTIONS CCC - CCC, DDD - DDD, EEE - EEE, AND FFF - FFF, SEE FIGURE 22


FIGURE 21. SLEEVE ENDING, HIP POCKET AND SIDE PASS-THROUGH SECTIONS




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

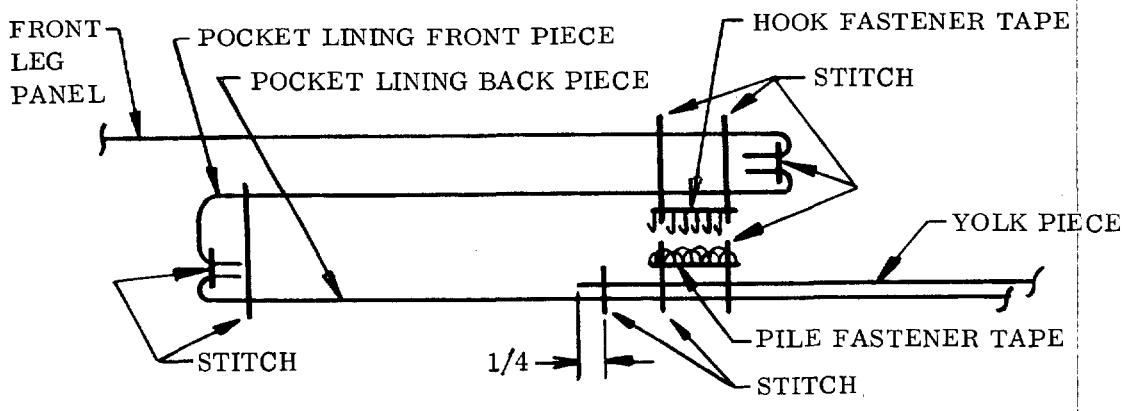



SECTION CCC - CCC

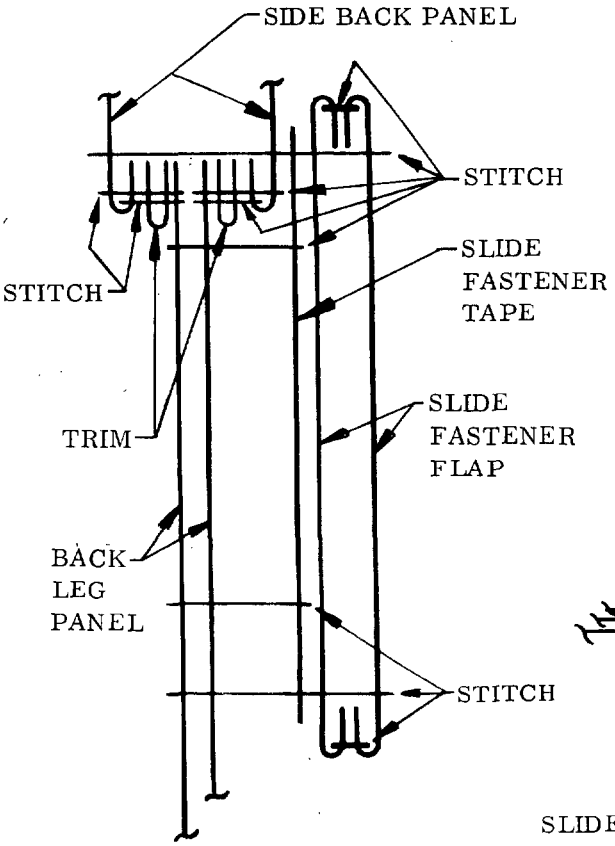


SECTION DDD - DDD

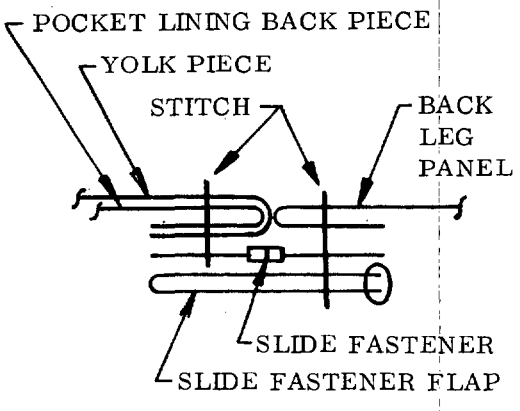


SECTION EEE - EEE

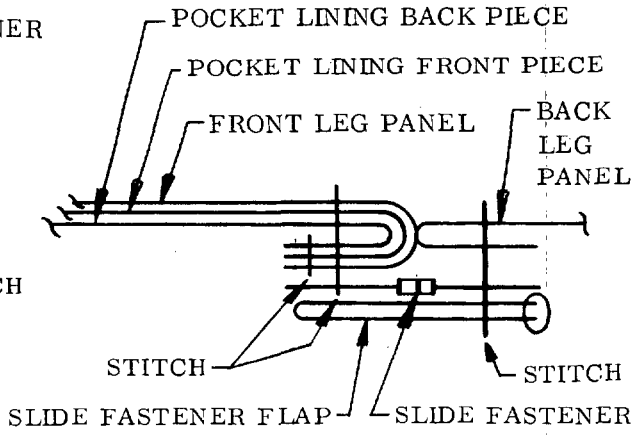



SECTION FFF - FFF


FIGURE 22. HIP POCKET AND SIDE PASS-THROUGH SECTIONS




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

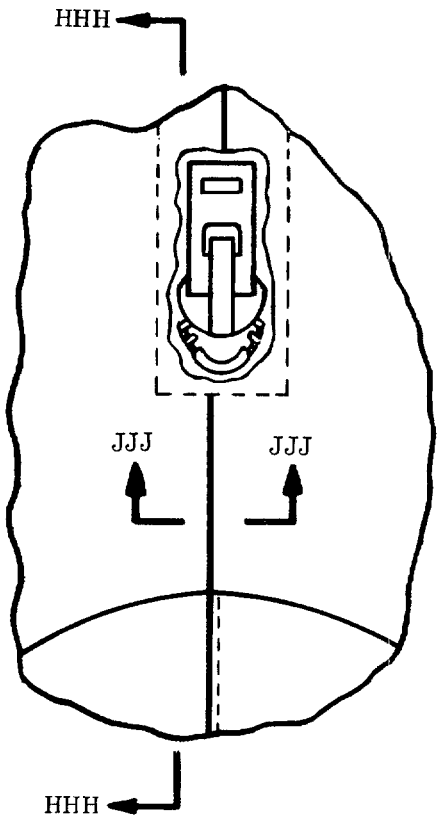


VIEW GGG

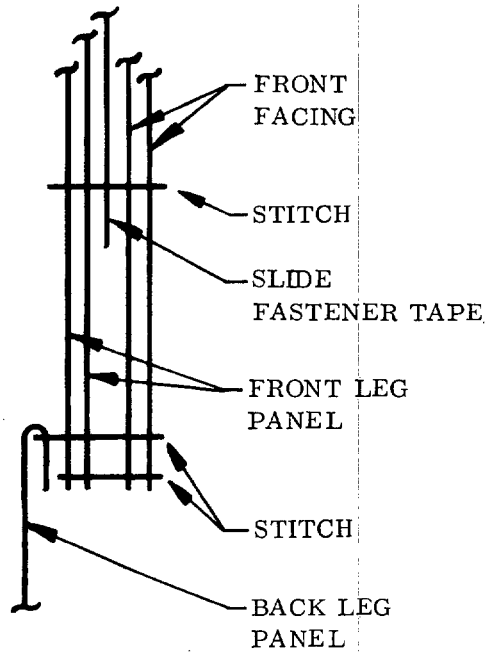


SECTION HHH - HHH

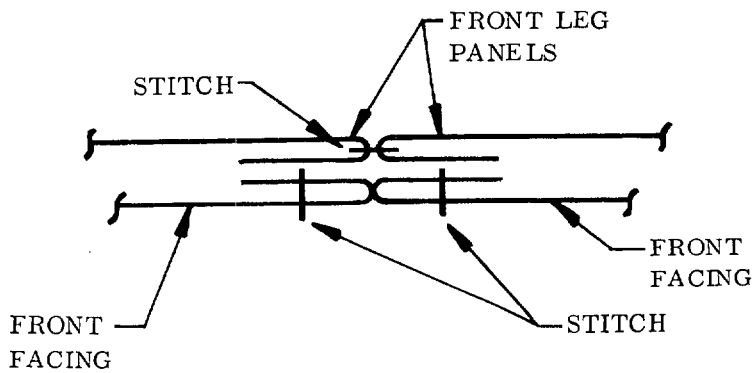



SECTION JJJ - JJJ


FIGURE 23. CROTCH SEAM SECTIONS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

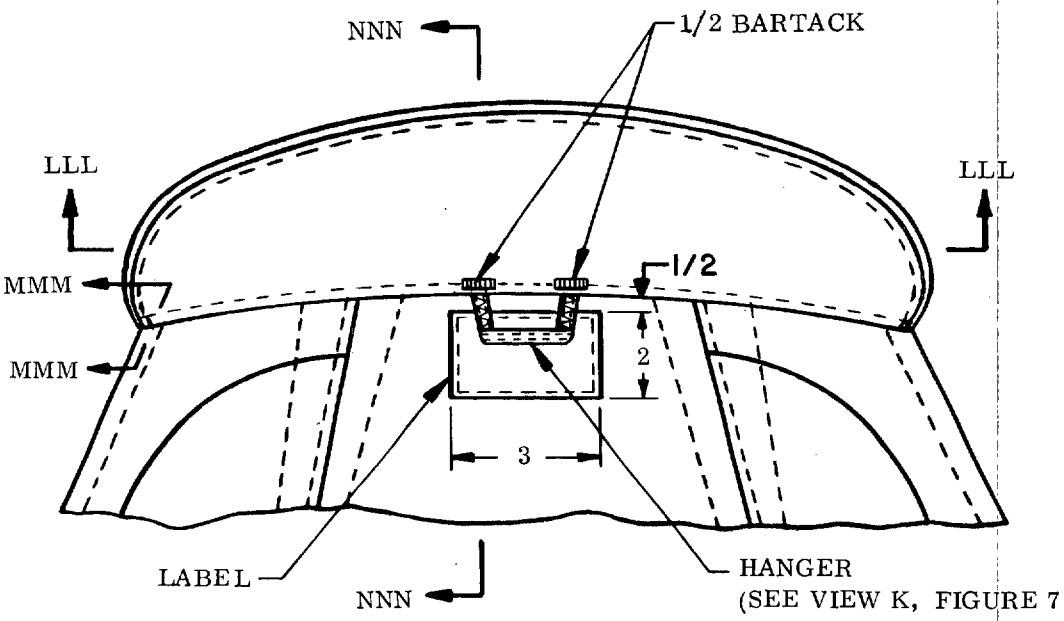


VIEW KKK

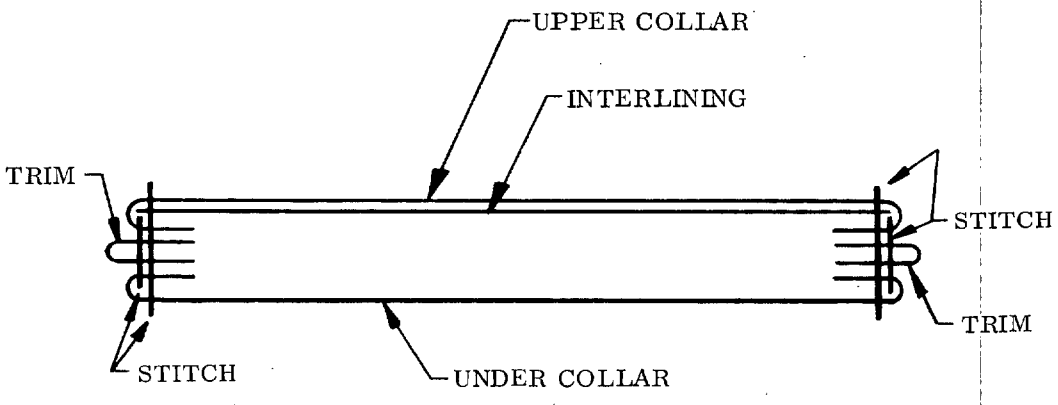



SECTION LLL - LLL

FOR SECTIONS MMM - MMM AND NNN - NNN, SEE FIGURE 25


FIGURE 24. UPPER COLLAR, HANGER, AND FRONT OPENING SECTIONS




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

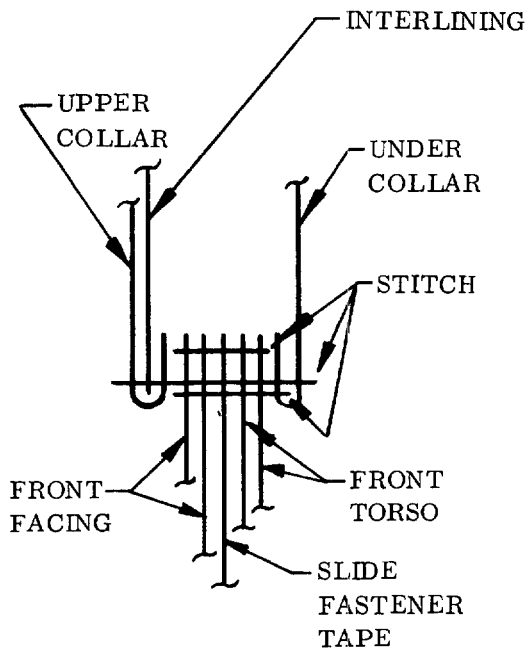


SECTION MMM - MMM

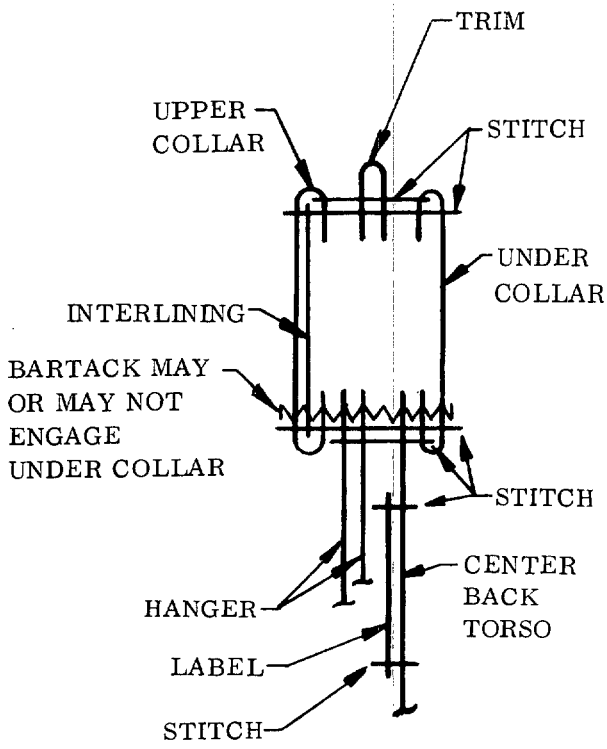


SECTION NNN - NNN

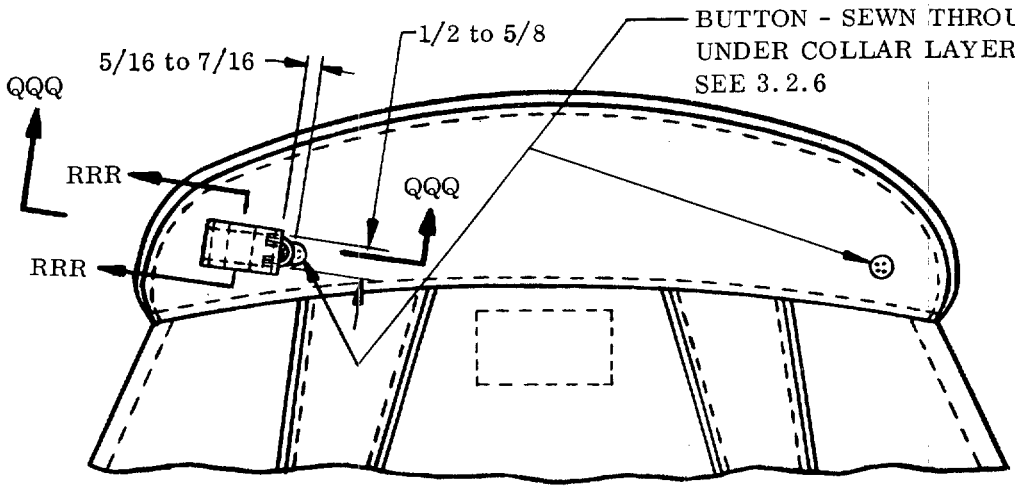



VIEW PPP

FOR SECTIONS QQQ - QQQ AND RRR - RRR, SEE FIGURE 26.


FIGURE 25. COLLAR, NECK CLOSURE STRAP, AND BUTTON SECTIONS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

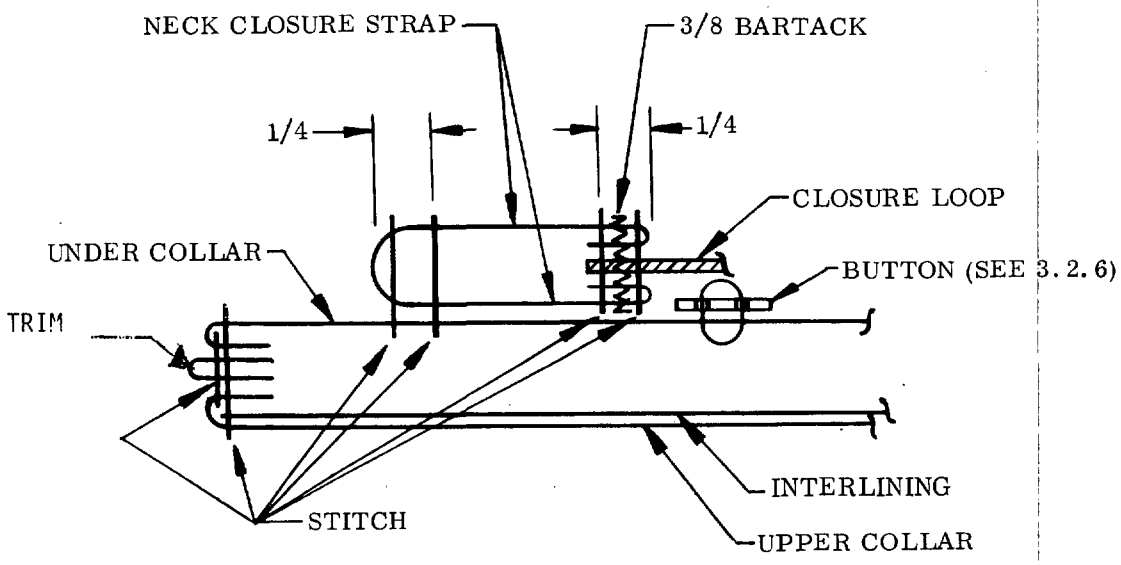


SECTION QQQ - QQQ

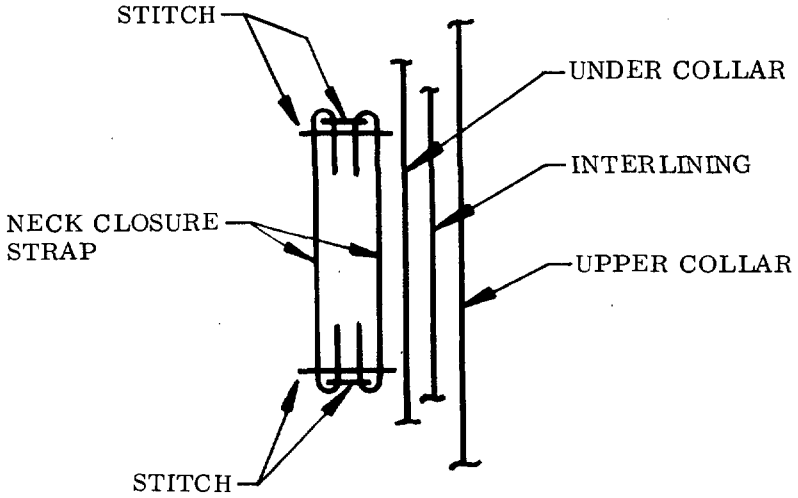


SECTION RRR - RRR

FIGURE 26. NECK CLOSURE STRAP SECTIONS

☆U.S. GOVERNMENT PRINTING OFFICE: 1978 — 703-122/3163



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-85078

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

**DD FORM 1426** 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Air Engineering Center, ESSD, Code 9312
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:49Z
Check the source to verify that this is the current version before use.