MIL-D-83935A (USAF)
26 Sep 1973
SUPERSEDING
MIL-D-83935 (USAF)
30 October 1968

MILITARY SPECIFICATION

DISHWASHING SYSTEM (COMMERCIAL), MULTIPLE-TANK, CONTINUOUS OVAL CONVEYOR-TYPE

1. SCOPE

1.1 Scope. This specification covers a commercial, multiple-tank, conveyor, spray-type dishwashing system with an oval-shaped, horizontal table-conveyor system.

1.2 Classification. The dishwashing system shall be one of the following types, styles, and rotations, as specified (see figure 1 and 6.2).

Type I - Steam Heated
Type II - Electrically Heated

Style A - With tray rail and table-mounted garbage disposal machine.

Style B - With food waste trough in lieu of tray rail; garbage disposal machine in center of trough.

Style C - Same as style A except disposal unit not furnished; food discharged to garbage can at disposal location.

Style D - Same as style B except disposal unit not furnished; food discharged to garbage can at disposal location.

Rotation CW Conveyor moves clockwise when viewed from above.

Rotation CCW Conveyor moves counter-clockwise when viewed from above.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

PPP-B-636	Box, Fiberboard
TT-P-664	Primer, Coating, Synthetic, Rust-Inhibiting Lacquer Resisting
00-D-1388	Dishwashing Machines, Commercial (Rackless Conveyor)

FSC 7320

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

00-D-1390	Dishwashing Machines, Double Tank, Commercial (Rack Conveyor)

Military

MIL-V-3	Valves, Fittings and Flanges (Except for Systems Indicated Herein), Packaging of
MIL-C-104	Crates, Wood; Lumber and Plywood Sheated, Nailed and Bolted
MIL-P-116	Preservation, Methods of
MIL-V-1174	Varnish, Spar, Water Resisting (Formula No 80)
MIL-H-15424	Hand Tools, Packaging of
MIL-G-15840	Garbage Disposal Machines, Commercial and Household
MIL-P-16298	Preservation, Packaging, Packing and Marking of Electric Machines Having Rotating Parts and Associated Repair Parts
MIL-E-17555	Electronic and Electrical Equipment and Associated Repair Parts, Preparation for Delivery of

STANDARDS

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-882	Systems Safety Program, for Systems and Associated Subsystems and Equipment: Requirements for
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking and Waterproofing, with Appropriate Test Methods

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL SANITATION FOUNDATION

NSF STD No 3	Commercial Spray-Type Dishwashing Machines - A Seal of Approval Listing of Food Service Equipment
NSF STD No 5	Commercial Gas Fired and Electrically Heated Hot Water Generating Equipment (for Food Service Establishments Using Dishwashing Machines.)

(Application for copies should be addressed to the National Sanitation Foundation, NSF Building, Ann Arbor, MI 48105.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY OF SANITARY ENGINEERS (ASSE)

ASSE STD No 1004

(Application for copies should be addressed to the American Society of Sanitary Engineers, 228 Standard Building, Cleveland, OH 44113.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 S. Riverside Plaza, Chicago, IL 60606.)

DEPARTMENT OF LABOR, OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION

Occupational Safety and Health Administration (OSHA) Standards with Supplemental Revisions

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

UNDERWRITERS' LABORATORIES, INC.

	UL Electrical Appliance and Utilization Equipment List
UL-73	Motor Operated Appliances

(Application for copies should be addressed to Underwriters' Laboratories, Inc., 207 East Ohio St., Chicago, IL 60611; 1655 Scott Blvd., Santa Clara, CA 95059; 2500 Dundee Rd., Box 247, Northbrook, IL 60062.)

AMERICAN TRUCKING ASSOCIATION, INC. (ATA)

National Motor Freight Classification Rules

(Application for copies should be addressed to the American Trucking Association, Inc., Traffic Dep't, 1616 P. Street, NW, Washington, DC 20035.)

Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using federal agencies.

3. REQUIREMENTS

3.1 Description. The dishwashing system shall consist essentially of a multiple-tank, conveyor, rackless or rack-type dishwashing machine and a direct-connected, horizontal, conveyor-table. The dishwashing machine and conveyor-table, when assembled, shall form an oval-shaped dish handling system generally similar to the applicable layout of figure 1. The system shall be designed to receive dirty dishes and glasses directly from the mess hall and to mechanically convey the items from the conveyor loading area through the dishwashing machine to the clean dish removal area of the conveyor. Provisions for disposing of garbage shall be in accordance with the style specified. The envelope dimensions of the complete system shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

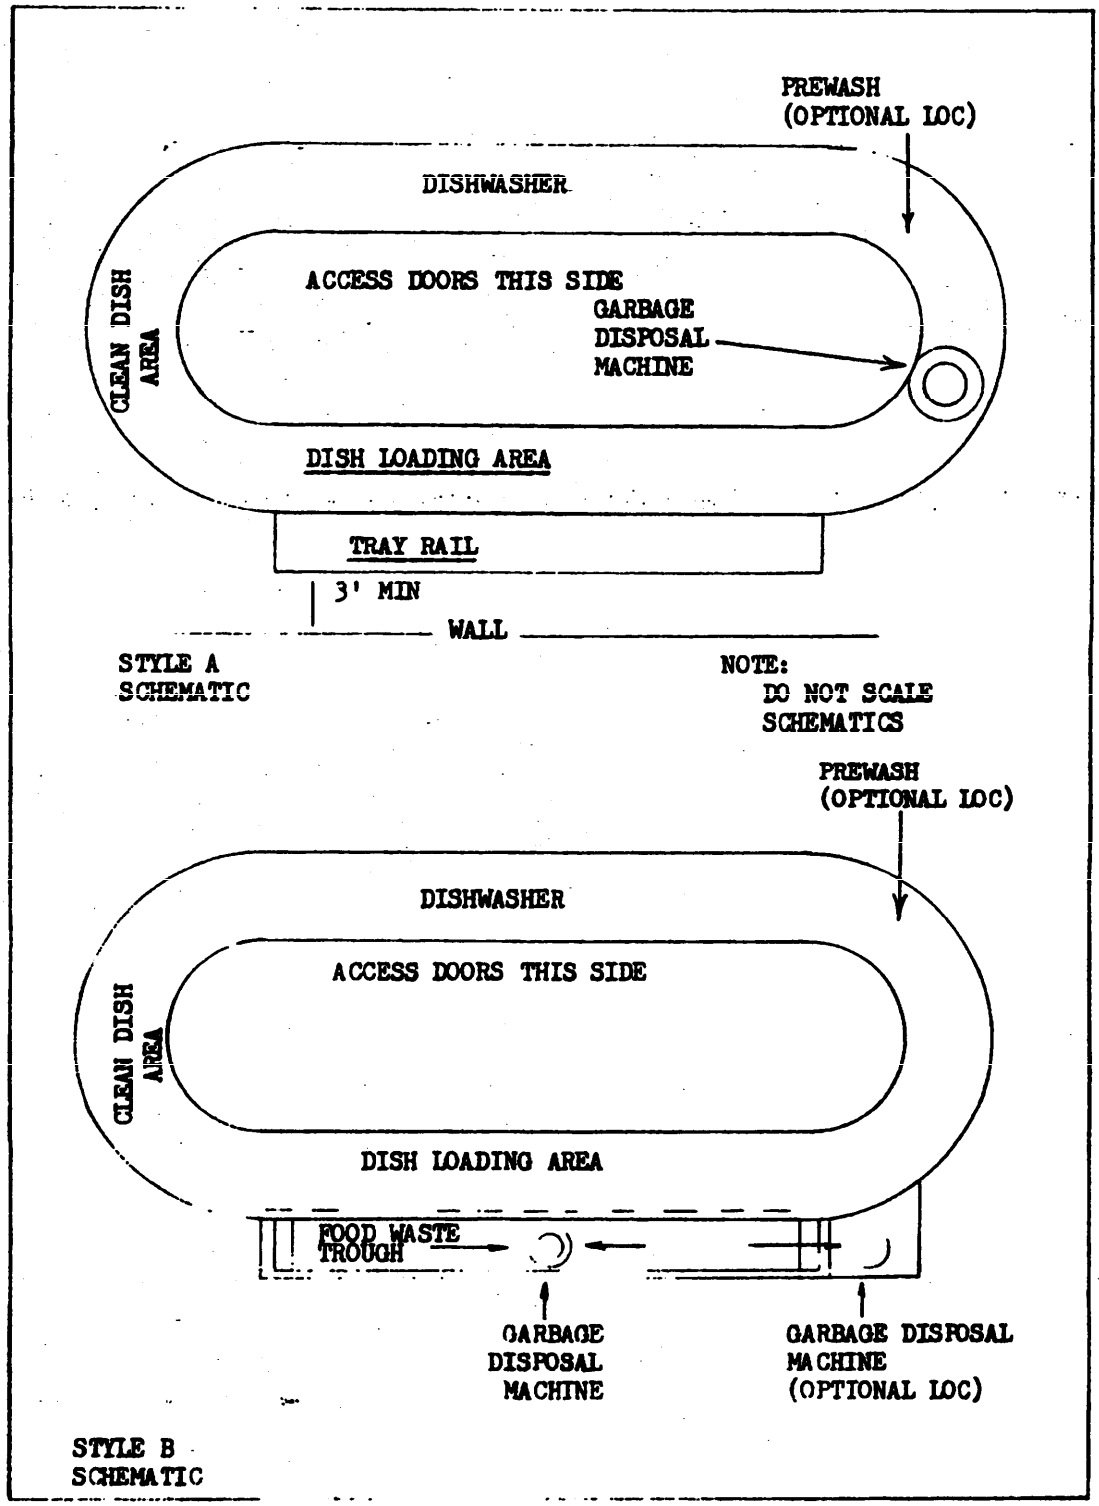


FIGURE 1. SCHEMATIC LAYOUTS FOR STYLE A AND STYLE B DISHWASHING SYSTEMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

be a maximum of 17 feet by 7 feet, exclusive of the tray rail or food waste trough which shall be detachable from the main system.

3.2 Preproduction sample. When specified (see 6.2), the contractor shall furnish, within the time limit specified in the contract, a preproduction sample for inspection. This inspection shall be as specified in 4.2.1 and shall be conducted prior to the submission for acceptance of the remainder of the machines to be furnished under the contract. The preproduction sample may be a standard production item from the supplier's current inventory of dishwashing machines and need not necessarily have been manufactured subsequent to award of the contract, provided the sample unit (1) meets the requirements of this specification, (2) is representative of the construction and manufacturing techniques to be applied to the contract units, (3) is a product of the same facility as the contract units, and (4) in all other respects is identical to the machines the supplier proposes to furnish in fulfillment of the contract. Following acceptance by the Government, the preproduction sample may be delivered as the last unit of supply under the contract. Approval of the preproduction sample on the basis of the specified inspection shall not relieve the contractor of his obligation to meet the requirements of this specification for the remaining units to be furnished under the contract.

3.3 Standards compliance. The dishwashing systems shall meet the requirements of NSF STD No 3 and shall be approved under the Underwriters' Laboratories, Inc. (UL) Re-examination Service.

3.3.1 Certification. Prior to approval of the preproduction sample, or if a preproduction sample is not required under terms of the contract, prior to the first shipment, the supplier shall submit to the contracting officer or his authorized representative satisfactory evidence that the dishwashing systems meet the requirements of the standards cited in 3.3. Acceptable evidence of meeting these standards will be as follows:

a. NSF STD No 3 - The official NSF symbol on the equipment or a listing in the latest issue of the NSF Seal of Approval Listing of Food Service Equipment.

b. UL - A listing of the latest issue of the UL Electrical Appliance and Utilization Equipment List or the official UL marking on the equipment authorized under the UL's Re-examination Service.

c. ASSE STD 1004 - Certification that the dishwashing system is in compliance with American Society of Sanitary Engineers' Standard 1004.

3.3.2 Alternate certification. In lieu of the certification required under 3.3.1(a) and 3.3.1(b), acceptable evidence of meeting the requirements of the standard cited will be certified test report from an independent testing laboratory selected by the manufacturer and approved by the contracting officer, indicating a system identical to the items to be furnished under this specification has been inspected in accordance with the applicable standards and meets the requirements thereof.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

3.4 Standard product. The dishwashing systems shall be the manufacturer's current standard commercial model which meets or exceeds the requirements of this specification and is identifiable by the manufacturer's established model number or equivalent designation. The systems shall be new and unused except to the extent required to perform the tests specified herein.

3.5 Interchangeability. All dishwashing systems of the same type and style furnished under a specific contract shall be identical to the extent required to permit interchangeability of replaceable parts, components, and assemblies.

3.6 Material. Material for the dishwashing system shall be as specified herein. Parts for which materials are not definitely specified shall be fabricated of materials acceptable under NSF STD No 3, or, if not covered therein, the materials shall be of corrosion resistant material. No mild or galvanized steel shall be used for any structural support component. Materials shall be free from any defects that would contribute to premature failure of the machine or would reduce or impair the usability of the unit.

3.7 Performance. The dishwashing system and associated table-conveyor system shall have a rated capacity as listed in the latest issue of the NSF Seal of Approval Listing of Food Service Equipment of not less than 350 dish racks (20-inch by 20-inch) or an equivalent number of dishes per hour with a conveyor speed not exceeding the rates established in the NSF Seal of Approval Listing as applicable to the model being furnished. When operating at rated capacity, the system shall comply with the applicable functional requirements of NSF STD No 3, including cycle time and water temperatures, pressures, volumes, and spray patterns for the pumped wash, pumped rinse, and final rinse.

3.8 Dishwashing system. The dishwashing system shall be similar to the machine identified in NSF STD No 3 as a circular, conveyor-type. The hoods, sliding doors, scrap receptacles and tanks shall be fabricated of type 301, 302, or 304 stainless steel having a thickness of not less than 16 gage. The system shall be mounted on stainless steel, adjustable feet conforming to NSF STD No 3. Vertical sliding doors not less than 16 inches wide shall be furnished on each wash and rinse compartment and shall be equipped with suitable latching mechanisms to hold the doors in the fully opened position. The machine shall consist of the following compartments:

a. Prewash

b. Pumped wash

c. Pumped rinse

d. Final rinse

3.8.1 Prewash compartment. A prewash compartment meeting the requirements of NSF STD No 3 shall be furnished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

3.8.2 Pumped wash compartment. The pumped (power) wash compartment shall be equipped with stainless steel scrap screens easily removed from the compartment. The compartment shall be equipped with an overflow pipe, a make-up water supply connection with manually-operated control valve, and a hand-or-foot operated drain valve having a nominal pipe size of not less than 1-½ inches. The water in the tank shall be automatically maintained by a thermostatic control at a predetermined temperature not less than 150° F, by steam or by electrical heating elements in accordance with the type specified (see 1.2). A dial type thermometer shall be mounted on the front of the machine to indicate the temperature of the water in the spray manifold. The wash section shall include an electric motor-driven pump rated to meet or exceed the applicable performance requirements of NSF STD No 3 with respect to volume, pressure, cycle time and spray pattern for recirculation of water from the tank to the spray manifolds. The spray boxes or spray arms shall be readily removable from the spray manifolds without use of tools, and spray arms shall be provided with readily removable end caps to facilitate cleaning.

3.8.3 Pumped rinse compartment. The pumped (power) rinse compartment shall conform to the requirements specified in 3.8.2 for the wash compartment, except that the water in the tank shall be automatically maintained by a thermostatic control at a predetermined temperature not less than 160° F.

3.9 Conveyor table. The conveyor table shall be constructed of type 302 or 304 stainless steel having a thickness sufficient to carry design loads and use (see 3.1) but shall not be less than 14 gauge. The table shall be of welded construction except for screwed or bolted joints necessary to meet the maximum dimension requirements of this paragraph, shall be water tight, shall drain toward the prewash section, and shall otherwise be constructed to meet the cleanability and sanitation requirements of NSF. The table shall be supported on stainless steel legs having an outside dimension of not less than 1-5/8 inches. The legs shall be preassembled with suitable cross bracing and shall be furnished with NSF approved adjustable feet. The table shall include a mechanical conveyor system designed to continuously transfer dishes or racks from the dish loading area through the machine to the clean dish area. The conveyor system shall include suitable means for sweeping food waste and liquids into either the garbage disposal machine or the prewash scrap baskets. The conveyor table at the dish loading area shall be equipped either with a tray rail or food waste trough in accordance with the style specified (see 1.2). The conveyor table shall be sectionalized for ease of shipping and no section shall exceed the following maximum dimensions:

Length - 10 feet, 6 inches

Width - 3 feet, 6 inches

Height - 5 feet, 9 inches

A back splash of not less than 18 gage stainless steel shall extend approximately 12 inches above the inner edge of the conveyor table, except at drive mechanisms, etc.

3.10 Controls and power.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:48Z
Check the source to verify that this is the current version before use.

3.10.1 Central controls. The system shall be furnished with a control cabinet meeting the requirements of Underwriters' Laboratories, Inc. Standards. The cabinet shall be mounted in a readily accessible location, and shall contain all controls necessary for operation of the machine, including but not limited to the following:

a. Individual thermal overload switches for each pump, tank heat circuit, and conveyor drive shall be readily accessible in the control cabinet.

b. An automatic device to conserve wetting agent, detergent, final rinse, etc.

c. An automatic device with means of manual reset to shut down the conveyor in case of a jam or other mechanical malfunction.

d. A timing device adjustable from 0 to 5 minutes to operate the disposal and its water supply after the system has been stopped.

3.10.2 Remote controls. A minimum of two (2) remote start/stop manual switches shall be located at predetermined locations around the periphery of the conveyor table.

3.10.3 Electrical power. Unless otherwise specified (see 6.2) the system shall be designed for operation on a 208 volt, 3 phase, 60 hertz power supply.

3.10.4 Prewiring of controls and components. All electrical components and controls shall be prewired to the extent that only the reconnection of sectionalized units and connection to each power source is required upon installation.

3.10.4.1 Circuits for type II machines. Type II machines shall be prewired to include the following circuits:

a. Motors and controls

b. Tank heating

c. Booster heating

3.11 Piping. All internal piping on the machine shall be complete up to the point where connections to water, drain, and for type I machine, steam lines, will be made at the site. The piping system shall include all necessary piping, fittings, vacuum breakers, line strainers, hand-operated valves, and automatically controlled solenoid valves. Valves for manual adjustment of flow rates shall be of the globe or angle type. All piping shall be in accordance with ASSE STD No 1004.

3.12 Details of components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

3.12.1 Heating. Steam heated, type I machines shall be equipped with steam injectors in the power wash and power rinse tanks for tank heating and a steam booster heater for the final rinse water. Electrically heated, type II machines shall be equipped with electric immersion heaters in the power wash and power rinse tanks for tank heating and an electric booster heater for the final rinse water. Tank heaters shall be sized and rated to meet the temperature requirements of NSF STD No 3 and shall be thermostatically controlled to automatically maintain the specified tank water temperatures. Tank heaters for type II classification shall be complete with low water cutoff protection.

3.12.2 Booster heaters. Booster heaters shall automatically maintain the required final rinse water temperature without producing steam either within heater or the piping connected to the heater. Booster shall be mounted under the conveyor table to form a component of the machine and shall be furnished complete with electric thermostat, pressure relief valve, pressure regulator and all other related controls and components necessary to assure safe operation. Steam booster for type I machines shall be factory preplumbed and prewired suitable for operation with steam pressures ranging from 15 psig to 40 psig at the machine. Electric booster for type II machines shall be factory preplumbed and prewired with high temperature limit switch for protection. Booster heaters shall have sufficient capacity, with a 60° F temperature rise, to meet the volume and temperature requirements of NSF STDs No 3 and No 5.

3.12.3 Pumps. Pumps for the prewash, power wash, and power rinse section shall be furnished with stainless steel shafts, stainless steel or nickel alloy impellers, and a removable inspection and clean-out plate, or a readily accessible strainer screen over the pump sump.

3.12.4 Garbage disposal machine. When style A or style B dishwashing machines are specified, a garbage disposal machine shall be furnished with each unit. The garbage disposal machine shall conform to type I (commercial) of MIL-G-15840. The machine shall be rated at not less than 3 horsepower and shall have a capacity of at least 1600 pounds per hour. The disposal machine shall be suitable for installation in the locations indicated in figure 1 in accordance with the style specified.

3.13 Accessories.

3.13.1 Detergent dispenser. Means for connecting an automatic detergent dispenser as specified in 00-D-1388 or 00-D-1390 shall be provided on the wash compartment of the machine.

3.13.2 Rinse injector. Means for connecting a drying agent injector as specified in 00-D-1390 or 00-D-1388 shall be provided on the final rinse compartment of the machine.

3.13.3 Racks. When specified (see 6.2) fifteen combination glass-dish racks shall be furnished with each machine. The racks shall be nominal 20-inch by 20-inch racks and shall be the manufacturer's standard racks suitable for use with the conveyor system being furnished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

3.13.4 Silver soak sink. When specified (see 6.2), a portable, caster-mounted soak sink for silverware shall be furnished. The sink shall be designed to accomodate standard silverware racks and shall be approximately 22 inches by 22 inches by 6 inches minimum deep. The sink shall be fitted with a drain hose. The sink and dolly-stand shall be of stainless steel construction. The height to the top of the sink shall be 34 inches ± 1 inch from the floor. Casters shall be of the swivel type with wheels not less than 4 inches in diameter. When a soak sink is specified, (2) silverware racks shall be furnished with each sink. The stand shall include a bottom shelf for storing extra silverware racks.

3.14 Treatment and painting. All exterior surfaces of the dishwasher except stainless steel surfaces, shall be treated and painted in accordance with the manufacturer's standard practice.

3.15 Identification marking. The dishwashing machines shall be marked for identification in accordance with MIL-STD-130.

3.16 Instruction plate. An instruction plate of corrosion-resistant metal or chrome-plated brass shall be attached to each machine at a height readily visible to the operator. The plate shall provide numbered, step-by-step instructions for operating and cleaning the dishwasher. Numbers corresponding to those on the instruction plate shall be attached on the machine at a location adjacent to the operating position. The instruction plate shall list the required water temperature for each section (prewash, wash, power rinse, final rinse.)

3.17 Radio interference suppression. When specified (see 6.2), the dishwashing machines shall be equipped to meet the interference control requirements of MIL-STD-461 for the equipment class specified in the contract.

3.18 Fungus treatment. When specified (see 6.2), the dishwashing machines shall be treated or constructed to resist fungus. Materials that are nutrients for fungi, if used, shall be treated with a fungicidal agent.

3.19 Safety. Equipment must be consistent with the applicable "OSHA" standards, and shall be free of category III and category IV hazards as determined in accordance with MIL-STD-882.

3.20 Workmanship. The dishwashing system shall be neatly finished and all burrs and rough edges shall be removed. Welds shall be sound, smooth, and free from pits, fractures, burn through or fissures. Bolt and rivet holes shall be accurately punched or drilled and shall have burrs removed. Lock washers shall be provided in accordance with standard commercial practice, and all bolts, nuts and screws shall be drawn tight. Rivets shall be tightly driven and fully peened. Electrical wiring shall be provided with adequate slack to relieve strain, and the wiring shall not be abraded, poorly joined or loose at the terminals.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection classification. Inspection shall be classified as follows:

a. Preproduction inspection

b. Quality conformance inspection

4.2.1 Preproduction inspection. Preproduction inspection shall be performed on one unit submitted when a preproduction sample is required (see 3.2). This inspection shall include the examination of 4.3 and all tests of 4.4.

4.2.2 Quality conformance inspection. Quality conformance inspection shall be performed on each machine being offered the Government. This inspection shall consist of the examination of 4.3 and the test of 4.4.1.

4.3 Examination. Machines furnished under this specification shall be examined during and after fabrication in accordance with the manufacturer's established quality control program. The quality control methods and procedures shall assure compliance with the requirements of this specification and referenced documents throughout all areas of contract performance including the receipt and identification of material, fabrication, and final assembly of the machine. The quality control program shall be subject to surveillance by the procuring agency or designated representative thereof.

4.4 Tests.

4.4.1 Operational test. Each machine shall be operated for at least one hour without dishes to determine compliance with this specification. The tests shall verify that the assembly of component parts is complete and of proper inter-relationship; that controls function properly; that tanks and piping systems do not leak; and that the overall performance of the unit is satisfactory.

4.4.2 Capacity test. Racks shall be placed on the conveyor for a period of not less than ten minutes to determine compliance with 3.7.

4.4.3 Radio interference tests. When radio interference suppression is specified, the preproduction sample shall be tested in accordance with MIL-STD-461. The tests to be conducted shall be as specified in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4.5 Inspection of preparation for delivery. The preservation, packaging, packing and marking of the dishwashing system shall be inspected to determine conformance with the applicable requirements of section 5 of this specification. The preservation, packaging, packing, and marking requirements of section 5 identified to referenced specifications and standards shall be inspected in accordance with applicable referenced specifications and standards. The preservation and packaging requirements of section 5 not identified in referenced specifications shall be examined for the defects listed in 4.5.1 on the basis of the sampling procedures and inspection levels used to determine examination requirements under MIL-P-116.

4.5.1 Classification of preservation and packaging defects.

Major	
101	Disassembly not as specified
102	Drive belts and pulleys not protected as specified
103	Gages not protected as specified
104	Nameplates and instruction plates not protected as specified
105	Cushioning and bracing not provided as specified

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Disassembly of components and parts. The dishwashing system shall be disassembled into components and parts meeting the requirements of this specification. Removed nuts, bolts and washers shall be secured to mating parts.

5.1.1.2 Unpainted ferrous metal surfaces. All unpainted ferrous surfaces shall be coated with P-14 preservative oil in accordance with MIL-P-116. The breaking, pulverizing, and expelling section of the garbage disposal machine shall be coated with type P-9 preservative oil in accordance with MIL-P-116.

5.1.1.3 Motors and electrical parts. The motors and electrical parts shall be preserved and packaged in accordance with MIL-P-17555 and MIL-P-16298, as applicable.

5.1.1.4 Drive belts and pulleys. Drive belts shall be removed or the belt tension shall be relieved. If belts are removed they shall be preserved individually or in sets by method 1C-1 in accordance with MIL-P-116. Pulley grooves shall be coated with lacquer resisting primer conforming to TT-P-664.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

5.1.1.5 Threaded connections. Inlet and outlet threaded connections shall be sealed with threaded metal or plastic caps or plugs.

5.1.1.6 Gages and thermometers. When gages or thermometers are removed, openings shall be sealed with commercial plugs or caps. Gages and thermometers shall be preserved in accordance with method III of MIL-P-116.

5.1.1.7 Valves and fittings. Valves and fittings shall be preserved and packaged in accordance with the level A requirements of MIL-V-3.

5.1.1.8 Nameplates and instruction plates. Nameplates and instruction plates shall be coated with spar varnish conforming to MIL-V-1174.

5.1.1.9 Racks. Racks shall be packaged in one or more snug-fitting fiberboard boxes conforming to PPP-B-636.

5.1.1.10 Disassembled components and parts, repair parts, and tools. Disassembled components and parts, repair parts and tools shall be preserved and unit packaged in accordance with MIL-P-17555, MIL-V-3, MIL-H-15424, and MIL-P-16298 and with the applicable methods described in MIL-P-116 for parts not specifically covered in the aforementioned documents.

5.1.1.11 Intermediate packaging. Disassembled components, parts and tools shall be packaged in one or more fiberboard boxes conforming to PPP-B-636, class 1. Contents shall be cushioned and braced to prevent movement within the boxes.

5.1.2 Level C. The dishwashing systems shall be disassembled into components and parts meeting the requirements of this specification. The components shall be preserved and packaged in accordance with the supplier's standard practice.

5.2 Packing. Packing shall be level A or C as specified (see 6.2).

5.2.1 Level A. The dishwashing system components as disassembled (see 5.1.1.1) including the garbage disposal machine and silver soak sink, when furnished, shall be packed in type I, class 2, style A crates conforming to MIL-C-104. No crate shall exceed the following overall dimensions:

Length - 11 feet, 9 inches

Width - 4 feet, 0 inches

Height - 6 feet, 6 inches

Contents shall be cushioned, blocked, braced, and anchored in accordance with MIL-STD-1186 and MIL-C-104.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

5.2.2 Level C. The disassembled dishwashing system (see 5.1.2) including the garbage disposal machine and silver soak sink, when furnished, shall be packed in a manner which will insure arrival at destination in satisfactory condition and be acceptable to the carrier at lowest rates. No container shall exceed the overall dimensions of 5.2.1. Containers and packing shall comply with Uniform Freight Classification Rules or National Motor Freight Classification Rules according to the mode of transportation.

5.2.3 Marking. In addition to any special marking required by the contract or order, packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The dishwashing system covered by this specification is intended for use in installations requiring large scale service of food. The system, capable of operation by one person, shall uniformly wash, rinse, and sanitize eating and drinking utensils by spraying them from above and below with an aqueous detergent solution and rinse water.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Type, style, and rotation required (see 1.2 and figure 1).

c. When a preproduction sample is required (see 3.2).

d. When electrical power supply will be other than as specified (see 3.10).

e. When a silver soak sink is required (see 3.13.4).

f. When radio interference suppression is required (see 3.17).

g. When fungus treatment is required (see 3.18).

h. Level of preservation and packaging and level of packing required (see 5.1 and 5.2).

i. When racks are required (see 3.13.3).

6.3 Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Air Force - 84

Preparing activity:
Air Force - 84

Project number:
7320-F547

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION
MIL-D-83935A (USAF)

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO IF "YES" IN WHAT WAY?

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity)	DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE. AF-WP-O-MAY 64 505

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE

WRAMA/MMEME
ROBINS AFB GA 31098

UNITED STATES AIR FORCE
OFFICIAL BUSINESS

WRAMA/MMEME
ROBINS AFB GA 31098

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.