MILITARY SPECIFICATION

HOOD, WINTER, FLYER'S

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type, size, and color of a flyer's winter hood. Patterns are available (see 6.3).

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-F-106	- Fasteners, Slide, Interlocking
V-L-61	- Laces, Nylon
V-T-280	- Thread, Cotton Gimp, Buttonhole
UU-P-268	- Paper, Kraft, Untreated, Wrapping
CCC-C-443	- Cloth, Duck, Cotton (Single and Plied Filling Yarns, Flat)
DDD-L-20	- Label, For Clothing, Equipage, and Tentage (General Use)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.

FEDERAL (Continued)

PPP-B-636	- Box, Fiberboard
PPP-T-45	- Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing

MILITARY

MIL-C-483	- Cloth, Pile, Alpaca and Wool
MIL-M-5631	- Mouton (For Flight Clothing)
MIL-C-6590	- Cloth, Pile (Synthetic Mouton, Knitted)
MIL-F-10884	- Fasteners, Snap
MIL-F-21840	- Fasteners, Nylon Tape
MIL-C-43824	- Cloth, Synthetic Fur, Knitted
MIL-C-81104	- Cord, Polyamide, High Temperature Resistant
MIL-C-81814	- Cloth, Twill, Aromatic Polyamide, High Temperature Resistant
MIL-T-83193	- Thread, Nylon, Spun Staple, High Temperature Resistant

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitching

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-1667	- Provisions for Evaluating Quality of Hoods, Cold Weather, Extreme Cold Weather and Flyer's
MS27981	- Fasteners, Snap, Style 2A (Small Wire Spring Clamp Type)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

(When requesting any of the applicable documents, refer to both title and number. All requests should be made via the cognizant Government quality assurance representative. Copies of this specification and other unclassified specifications and standards required by contractors in connection with specific procurement functions should be obtained upon application to the Commanding Officer, Naval Publications and Forms Center (Code 1051), 5801 Tabor Avenue, Philadelphia, Pennsylvania 19120. All other documents should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials and components. The materials and components shall conform to the applicable specifications and standards as listed or required herein.

3.1.1 Cloth.

3.1.1.1 Outershell. The outershell shall be fabricated from the high temperature resistant cloth conforming to MIL-C-81814. The color of the cloth shall match Sage Green, USAF Color Shade No. 1565 (see 6.4), when inspected as specified in 4.4.1.

3.1.1.2 Lining. The lining, for the helmet portion, shall be fabricated from the alpaca pile cloth conforming to MIL-C-483, Type VII, color natural.

3.1.1.3 Interlining. The interlining, for the storm and front opening flaps, shall be fabricated from the cotton duck conforming to CCC-C-443, Type II, 7.3 ounces per square yard, color optional. The storm flap shall contain two plies of the interlining and the front opening flap shall contain one ply.

3.1.1.4 Front opening and neck facings, thong, eyelet reinforcement, and front opening and storm flaps. The front opening and neck facings, thong, eyelet reinforcement, and the front opening and storm flaps shall be fabricated from the outershell cloth, 3.1.1.1.

3.1.2 Slide fasteners. The slide fastener shall conform to V-F-106 and Table I. The chain endurance inspection of V-F-106 is applicable. The chain and all the other metal components shall be brass with a black chemical finish. The slide fastener tapes shall be high temperature resistant polyamide, dyed to approximately match the color of the outershell cloth, 3.1.1.1, when inspected as specified in 4.4.1 and shall have at least "good" colorfastness to laundering. The thong, 3.1.1.4, fabricated as specified in Figure 11, shall be looped through and securely knotted to the pull, approximately at the center of the thong length. The free finished length of the thong shall be 2-1/2 $\pm$ 1/4 inches. The width of the thong shall be compatible with the opening in the pull. The ends of the thong shall be cut on an angle of approximately 60 degrees.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

TABLE I. Slide Fastener Properties.

LOCATION	Description				
	Type	Style	Size	Pull	Length Inches
Front opening	IV	8	M	Short Tab	15-1/2
Hood opening (Top)	I	7	M	Short Tab	13

3.1.3 Synthetic fur. The synthetic fur for facing the storm flap shall conform to MIL-C-43824, Class 2. The cut strips shall be 2-3/8 ± 1/16 inches in width and 13-3/4 ± 1/4 inches in length. Attach one strip to each side of the storm flap so that the natural lie of the hair will be towards the center hood opening slide fastener.

3.1.4 Drawstrings. The drawstrings for the neck area, shall conform to V-L-61, Type II, Class 1 or 3, 20 inches ±1/2 inches long, color black.

3.1.5 Snap fastener. The snap fastener shall conform to MIL-F-10884, Style 2A, Finish 2 and MS27981-1B, -3B, -4B, and -5B.

3.1.6 Mouton. The mouton, for facing the face opening of the helmet portion, shall conform to MIL-M-5631, Type I, Class 1 or MIL-C-6590, Type II. The mouton shall be dyed brown and shall match the following Munsell Color Notation, Hue 10R to 5YR, Value 2 to 3, Chroma 0.2 to 2, when inspected as specified in 4.4.1. The mothproofing treatment requirement as specified in MIL-M-5631 is not applicable. The mouton strips shall be 2 ±1/4 inches wide. The mouton strip for the right side of the helmet shall be 10-7/8 ±1/8 inches and for the left side of the helmet shall be 12-7/8 ±1/8 inches in length. The total length shall conform to Table II, Location e.

TABLE II. Hood Dimensions.

Location	Dimensions inches	Tolerance inches
a	10-1/4	±1/4
b	4-1/4	±1/4
c	2	±1/4
d	15-1/4	±1/2
e	23-3/4	±1/4
f	27-1/2	±1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

3.1.7 Thread. All the sewing operations shall be performed with the high temperature resistant, polyamide, staple thread conforming to MIL-T-83193. The color of the thread shall approximately match the color of the outershell cloth, 3.1.1.1, when inspected as specified in 4.4.1.

3.1.8 Gimp. The gimp thread, for reinforcing the buttonholes, shall conform to V-T-280, Type I or II, Size Number 8. The color of the gimp thread shall approximately match the color of the outershell cloth, 3.1.1.1, when inspected as specified in 4.4.1. The gimp thread shall have at least "good" colorfastness to laundering.

3.1.9 Buttons. The buttons shall conform to V-B-871, Type II, Class D, Style 20 or 21, Size 30 Line, Dull Finish. The color of the buttons shall approximately match the color of the outershell cloth, 3.1.1.1, when inspected as specified in 4.4.1.

3.1.10 Closure loop. The closure loop, for the storm flap, shall be fabricated from the high temperature resistant cord conforming to MIL-C-81104. The color of the cord shall approximately match the color of the outershell cloth, 3.1.1.1, when inspected as specified in 4.4.1.

3.1.11 Fastener tapes. The nylon hook and pile fastener tapes shall conform to MIL-F-21840, Type I, Class 1. The width of the hook and pile tapes for the waist adjustment shall be one inch wide, the lengths shall be governed by the patterns. The color of the fastener tapes shall approximately match the color of the outershell cloth 3.1.1.1, or may be black.

3.2 Design. The assembled flyer's winter hood shall completely cover the head, neck, and the upper body of the wearer to a point level with the armpits. The helmet portion of the hood shall be lined with the alpaca pile cloth and the periphery of the face opening shall be faced with the mouton. The storm flap, with a protective synthetic fur ruff, shall be attached to the helmet portion of the hood. The hood shall conform in appearance to Figures 1 through 3.

3.3 Construction.

3.3.1 Cutting. The hoods shall be cut in strict accordance with the furnished patterns which show seam allowance, size, shape, and placement of the components, directional lines for cutting, and notches or markings for the proper assembly of all the parts. The component parts, of the outerside of the hood, shall be cut from the same ply of the lay. The front opening and neck facings, thong, eyelet reinforcement, and the front opening flap may be cut from the ends. The thong may also be prefabricated from one continuous piece of the outershell cloth and then cut to the proper length as required by 3.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

3.3.2 Shade marking. Except for those parts cut from the ends (see 3.3.1), all the component parts of the hood shall be marked or ticketed, by any commercial methods, to insure a uniform shade throughout the outershell and for the proper assembly of the hood. No metal fastening device or sewn-on ticket shall be used. The shade markings shall be accomplished by the use of an ink pad numbering machine, rubber stamp, or pencil, provided the markings do not show through to the outerside and are not deleterious to the material marked. The markings, which are placed on the seam allowance, shall not be visible on the outerside. The adhesive type shade marking tickets may be used, for the shade markings, provided, they conform to 3.3.2.1. The assembled hood shall not contain any shade tickets. The bundling method may be used in lieu of shade marking, provided it conforms to 3.3.2.2.

3.3.2.1 Adhesive shade marking tickets. The adhesive shade marking tickets shall be fabricated from paper with a thermo-activated adhesive applied on one side. The adhesive shall not discolor or damage the cloth, mouton, alpaca, or fur, as applicable, and the adhesive mass shall not adhere to the cloth, mouton, alpaca, or fur, as applicable, upon removal of the ticket. The heat used to attach the thermo-activated adhesive tickets shall not stiffen, harden, sear, or damage the cloth, mouton, alpaca, or fur, as applicable, in any manner.

3.3.2.2 Bundling method. The bundling method may be used, in lieu of the shade marking, provided each bundle contains parts cut only from the same piece of the outershell cloth. The bundle shall be numbered or otherwise identified to assure that the outerside component parts, of the assembled hoods, are from the same piece of the outershell cloth.

3.3.3 Seams and stitching. All the seams used in the fabrication of the hood shall conform to Figures 1 through 11. Unless otherwise specified, all the sewing shall be accomplished with Stitch Type 301, as described in FED-STD-751, 10 to 12 stitches per inch. Except for the ends of the thong, no cut or raw edges shall be visible. All the seam edges shall be properly forced out and shall not contain any fold greater than 1/8 inch. No seam or component shall be twisted, puckered, or pleated and no part of the hood shall be caught in an unrelated operation or seam. All the thread ends shall be trimmed to a maximum length of 3/8 inch.

3.3.3.1 Sewing. Each row of stitching shall be straight and parallel to the seam edge. The straightness of the stitching, in any row, shall be maintained within a tolerance of plus or minus 1/32 inch. Unless otherwise specified, all the stitching shall be 1/16 inch from the edge (see Figure 7). The ends of the stitching, that are not caught in other seams or stitching, shall be securely backstitched, by overlapping on themselves, for at least 1/2 inch. The thread breaks, skips, and run-offs shall be overstitched not less than one inch. The thread tension shall be maintained so that there will not be any loose or tight stitching and the lock will be embedded in the materials sewn together.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

3.3.3.2 Attaching of the buttons. The storm flap buttons shall be sewn through the top of the flap and through the two plies of the interlining only. The buttons on the helmet section, for securing the storm flap to the helmet, shall be sewn through the outershell and alpaca lining, and shall be aligned with buttonholes on the storm flap so that when buttoned the storm flap will lie smooth without any twisting, distortion, or puckering. The buttons shall be attached, by hand or machine sewing, as follows:

3.3.3.2.1 Hand sewing. The buttons shall be attached, by hand sewing, with a minimum of four double strands of the thread through each sewing hole. The thread shall then be wound around the attaching threads, a minimum of four times, to form a shank, 1/8 to 3/16 inch long. The threads shall be passed through the shank at least four times to secure the loose ends.

3.3.3.2.2 Machine sewing. The buttons shall be attached, by machine sewing, with Stitch Type 101 or 301 as described in FED-STD-751. The buttons, attached with Stitch Type 101, shall contain 20 to 24 stitches per button. The buttons attached with Stitch Type 301, shall contain 14 to 16 stitches per button. Each machine sewn button shall contain a securely machine wrapped shank, 1/8 to 3/16 in inch long.

3.3.3.3 Buttonholes. The buttonholes shall be clean cut and uniform in appearance. The buttonholes, on the storm flap, shall be of the eyelet end taper-bar type and worked over the gimp. The material shall be securely caught in the stitching and the ends of the buttonholes shall be tacked. The purling and the gimp shall be on the underside of the storm flaps, so that the button will ride on them when the storm flap is folded back and buttoned to the helmet. Each buttonhole shall contain a minimum of 56 stitches, including the tacking. Each buttonhole shall have a cut opening of 7/8 to one inch. The center, of each button, shall be properly aligned with the eyelet of the corresponding buttonhole.

3.3.3.4 Sewn eyelets. The sewn eyelets, for the drawstrings, shall be sewn on the outerside of hood, at the neck area. The bight of the stitching, around the eyelets, shall be a minimum of 1/16 inch. The start and finish stitching shall overlap each other 1/16 to 3/32 inch. The inner diameter, of the eyelets, shall be 1/8 to 3/16 inch. Each sewn eyelet shall contain 35 to 40 stitches. The number of stitches per eyelet shall be determined by counting the number of needle penetrations, in the outer diameter, of the eyelet. The overlapping stitches shall also be included, when determining the number of stitches per eyelet. The eyelets shall be constructed with Stitch Type 501, 502, or 503 as described in FED-STD-751. When Stitch Type 501 is used, the purling shall be on the underside of the outershell cloth. When Stitch Type 502 or 503 is used, the outerside purling shall be located on the outer diameter of the eyelet and the innerside purling shall not be pulled to the outerside of the hood. The thread ends shall be on the underside of the outershell cloth. As an alternate, straight-cut buttonholes may be substituted for the sewn eyelets. The material shall be securely caught in the stitching and the ends, of the buttonholes,

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the currentversion before use.

shall be tacked. The purling shall be on the outerside and the cut opening shall be 1/8 to 3/16 inch.

3.3.3.5 Bartacking. Each bartack shall be 1/2 inch long and shall contain a minimum of 28 stitches. The location of each bartack shall conform to Figures 1, 5, and 6.

3.3.3.6 Overedge stitching. All cut edges of outershell cloth shall be overedge stitched (serged) with Stitch Type 501, 502, 503 or equivalent, as described in FED-STD-751.

3.3.4 Constructional details. The construction of the flyer's winter hood shall conform to Figures 1 through 13.

3.4 Dimensions. The hood shall be full cut and after assembly shall conform to Table II, when measured as specified in 4.4.3.

3.5 Label. The identification label shall be centered, within 1/2 inch, and sewn on all the four sides to the neck facing in such a manner that the stitches do not show on the back exterior of the outershell. The label shall be located as specified in Figure 8. The label shall conform to DDD-L-20, Type I, Classes 1 and 3, Launderable Label, 1-1/2 by 5 inches. The label shall contain the following information:

HOOD, WINTER, FLYER'S
MIL-H-85037
CONTRACT OR ORDER NO.
NAME OF MANUFACTURER
NSN

THIS OUTERSHELL IS FABRICATED FROM INHERENT FIRE RESISTANT MATERIAL (NOMEX) THAT DOES NOT MELT OR DRIP. NO RETREATMENT IS NECESSARY. CAN BE DRY CLEANED WITHOUT LOSING ITS FIRE RESISTANT PROPERTIES.

The left side of the label shall contain the nomenclature. The right side shall contain the information portion which shall be separated from the nomenclature by a vertical line. The thickness and length of line shall be optional.

3.6 Workmanship. After completion of the final assembly, the hoods shall be thoroughly cleaned and all loose thread, lint, and foreign matter shall be completely removed. The snap fasteners shall be securely clinched without distortion, cracking, splitting, or cutting of the cloth. The snap fastener studs and sockets shall be properly aligned so that, when snapped together, shall not cause a noticeable bulge or twist to the hood. The hoods shall not contain any non-specified hole, tear, cut, burn, needle chew, spot, stain, or weakening defect. The metal

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:48Z
Check the source to verify that this is the currentversion before use.

components shall not be misaligned or distorted nor contain any nick, burr, dent, sliver, crack, or sharp edge. The movement of the sliders shall not be interferred with and the sliders shall close the slide fasteners in the upward direction. The hoods shall be uniform in quality and shall be free from irregularities or defects which could adversely affect performance, reliability, or durability. The hoods shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the acceptable point value or defect limit.

3.7 Patterns. Standard patterns will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used for cutting the supplier's working patterns. The working patterns shall be identical to the standard patterns.

3.7.1 Pattern parts. The component parts shall be cut from the material specified in accordance with the following pattern parts:

Material	Pattern parts	Cut parts
Cloth, Twill Aromatic Polyamide	Helmet, Side Panel	2
	Helmet, Center Panel	1
	Neck Facing	1
	Storm Flap	2
	Front Panel	2
	Back Panel	1
	Front Panel Facing, Right Side	1
	Front Panel Facing, Left Side	1
	Closure Flap	1
	Closure Tab	1
Cloth, Pile, Alpaca and Wool	Helmet, Side Panel Lining	2
	Helmet, Center Panel Lining	1
Cloth, Duck	Storm Flap Interlining	4
	Front Panel, Right Side Interlining	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Inspection. Inspection shall be performed in accordance with MIL-STD-1667 except when otherwise indicated.

a. Quality conformance inspection - Quality conformance inspection consists of examinations and tests performed on individual products or lots to determine conformance of the products or lots with the requirements set forth in this specification (see 4.3 through 4.3.1.2).

4.3 Quality conformance inspection. The sampling and inspection levels shall conform to MIL-STD-105. The quality conformance inspection shall consist of the following:

Visual examination of the hoods

Dimensional check of the hoods

Preparation for delivery

4.3.1 Sampling.

4.3.1.1 Inspection lot.

4.3.1.1.1 Hoods. An inspection lot size shall be expressed in units of one hood that is typical of production garment quality. The sample unit shall be one hood.

4.3.1.1.2 Packaging. An inspection lot size shall be expressed in units of one fully prepared shipping container, containing hoods. The hoods shall be typical of production garment quality and be fully prepared for delivery. The sample unit shall be one shipping container, containing hoods, fully prepared for delivery with the exception that it need not be sealed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4.3.1.2 Sampling for examinations and tests of the hoods and packaging. The sample size, acceptance criteria, examinations, and tests required, for the hoods or the packaging, as applicable, shall be as specified in Table III, and MIL-STD-105.

TABLE III. Sample size, acceptance criteria, examinations, and tests of the hoods and packaging.

Inspection	Paragraph		Sample size	Acceptance criteria
	Requirement	Method		
Visual examination	3.2 through 3.3.4, 3.5, 3.6, and Figures 1 through 13	4.4.2.1 and Table IV	Inspection Level II	An acceptable quality level of 2.5 defects per 100 units for major defects, 15.0 defects per 100 units for major plus minor A defects, and 25.0 defects per 100 units for total (major plus minor A and minor B) defects
Dimensional check	3.4 and Table II	4.4.2.1, Table V, and 4.4.3	Inspection Level S-3	An acceptable quality level of 4.0 defects per 100 units
Preparation for delivery	Section 5	4.4.2.2 and Table VI	Inspection Level S-2	An acceptable quality level of 2.5 defects per 100 units

4.4 Inspection methods.

4.4.1 Color matching. The color of the outershell cloth, mouton, slide fastener tapes, thread, gimp, buttons, and closure loop, as applicable, shall be compared to the approved standard shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin, and shall be a good approximation to the standard sample under incandescent lamplight at 2800 degrees Kelvin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4.4.2 Visual examination.

4.4.2.1 Hood. Each hood, selected as a sample unit from the lot, shall be thoroughly checked dimensionally and examined visually to determine conformance to this specification. The classification and list of defects, Tables IV and V, as applicable, shall be used to classify and enumerate the defects found.

TABLE IV Classification of defects for the visual examination of the hoods.

Defect	Major	Minor	
		A	B
MATERIAL DEFECTS AND WORKMANSHIP DAMAGES			
GENERAL			
a. Any non-specified hole, scissors or knife cut, tear, mend, burn, or weakening defect, such as smash, multiple float, loose slub, needle chew, or abraded area	1/		
b. Any portion of the hood stiffened, hardened, or seared by any process of manufacturing	1/		
METALLIC COMPONENTS			
a. Any surface rough, misaligned, distorted or contains any nick, sliver, burr, sharp edge, or crack	X		
b Any loose, detached, or otherwise not securely retained	1/		
c Any surface unclean or contains embedded foreign matter			X
d. Any malformed, corroded, fractured, broken, dented, chipped, or bent	X		
e. Any not black chemically finished, finish missing, or not uniformly finished		X	
f. Slide fastener 2/			
1. Not specified type, size, pull, or style	1/		
2 Movement of the slider interfered with or scoops do not mesh or interlock	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

TABLE IV (Continued)

Defect	Major	Minor	
		A	B
METALLIC COMPONENTS (Continued)			
3. Any portion of the hood or slide fastener tape puckered, twisted, or pleated at the slide fastener tape joining seam, when the slide fastener is open or closed		X	
4. Retainer portion is less than 1/2 inch or more than 3/4 inch above the bottom edge of the hood. (see Figure 5, View D)		X	
5. Slider not located at the specified position, when the slide fastener is closed		X	
6. Any thong omitted or less than 2-1/4 inches or more than 2-3/4 inches			X
7. Any thong not securely knotted to the pull 3/			X
g. Snap fastener 4/			
1. Any mismated		X	
2. Any improperly clinched resulting in cutting of the cloth	X		
3. Off center			
(a) Any more than 1/8 inch but not more than 1/4 inch		X	
(b) Any more than 1/4 inch	X		
4. Any snap fastener stud not aligned with the socket causing a noticeable bulge or twist, when snapped closed		X	
MOUTON, SYNTHETIC FUR, OR ALPACA			
a. Not dressed correctly (coarse, hard, or brittle)	1/		
b. Any portion rotted, stiff or boardy, bare spot, or lack of flexibility	X		
c. Ruff formed with more than three strips or any fur missing	1/		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

TABLE IV (Continued)

Defect	Major	Minor	
		A	B
MOUTON, SYNTHETIC FUR, OR ALPACA (Continued)			
d. Natural lie of the fur, in any end piece, not in the up direction towards the hood opening slide fastener		X	
e. Any alpaca pile missing, crushed, uncut, or improperly formed	1/		
f. Any matted, knotted hair or pile		5/	
g. The difference in overhang between the ends of the mouton or the fur ruff is greater than 1/4 inch		X	
SHADED PARTS			
a. Any part shaded or any shade bar		X	
b. Color of any component not as specified or not uniform		X	
CLEANNESS			
a. Any unsightly slub, adhesive shade marking ticket adhesive mass, spot, or stain on the outerside of the hood		X	
b Three or more thread ends not trimmed to a maximum length of 3/8 inch or three or more thread scraps not removed from the hood			X
c. Any shade marking ticket not removed or any shade identification marking stamping visible on the outside of the hood			X
d. Any metal fastening device or sewn on shade marking ticket	X		
e. Any portion of the outerside of the hood discolored, where the adhesive shade marking ticket was attached		X	
COMPONENTS AND ASSEMBLY			
a. Any component not as specified or any defect of a compoment or defect of assembly, not herein classified	1/		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

TABLE IV (Continued)

Defect	Major	Minor	
		A	B
COMPONENTS AND ASSEMBLY (Continued)			
b. Any component, component part, or required operation omitted, or any operation improperly performed, not herein classified	1/		
c. Any component part not cut in accordance with the patterns, not herein classified	1/		
SEAMS AND STITCHING			
a. Accuracy of seaming:			
1. Any seam, hem, or attachment of any component twisted, puckered, or pleated, any part of the hood or component caught in an unrelated operation or stitching; any seam edge not properly forced out or contains any fold more than 1/8 inch		X	
2. Ends of stitching that are not caught in other seams or stitching:			
(a) Any not securely backstitched	X		
(b) Any secure but backstitched for a distance less than 1/2 inch or the backstitching is not overlapped on itself		X	
3. Thread breaks:			
(a) Any not securely overstitched		X	
(b) Any secure but overstitched for a distance less than one inch		X	
b. Gage of stitching 6/:			
1. Any stitching irregular, unevenly gaged, or not uniform			X
c. Open seams 7/:			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

TABLE IV (Continued)

Defects	Major	Minor	
		A	B
SEAMS AND STITCHING (Continued)			
1. Outerside of the hood			
(a) Any 1/8 to 1/4 inch			X
(b) Any more than 1/4 inch but not more than one inch		X	
(c) Any more than one inch	X		
2. Innerside of the hood			
(a) Any 1/4 to 1/2 inch			X
(b) Any more than 1/2 inch		X	
d. Raw edges 8/			
1. Outerside of the hood			
(a) Any more than 1/8 inch but not more than 1/4 inch			X
(b) Any more than 1/4 inch but not more than one inch		X	
(c) Any more than one inch	X		
2. Innerside of the hood			
(a) Any more than 1/4 inch but not more than one inch			X
(b) Any more than one inch		X	
e. Run-offs, skipped, or broken stitches			
1. Joining seams - when resulting in an open seam use "Open Seam" classification			
2. Top stitching, when not resulting in an open seam			
(a) Outerside of the hood			

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:48Z
Check the source to verify that this is the current version before use.

TABLE IV (Continued)

Defects	Major	Minor A	Minor B
SEAMS AND STITCHING (Continued)			
(1) Any 1/4 to 1/2 inch			X
(2) Any more than 1/2 inch		X	
(b) Inner side of the hood:			
(1) Any 1/2 to one inch			X
(2) Any more than one inch		X	
f. Seam and stitch type			
1. Not specified seam or stitch	1/		
g. Stitch tension			
1. Any loose stitching 9/	1/		
2. Any tight stitching resulting in the breaking of the stitches, when normal pull is applied 10/	X		
h. Stitches per inch 11/			
1. Stitches more or less than specified			
(a) Hood (excluding label):			
(1) One or 2			X
(2) Three		X	
(3) More than 3	X		
(b) Label			
(1) One to 3			X
(2) More than 3		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

TABLE IV (Continued)

Defects	Major	Minor	
		A	B
SEAMS AND STITCHING (Continued)			
i. Bartacks			
1. Any loose, misplaced, or not serving the intended purpose		X	
j. Sewn eyelets			
1. Any omitted	X		
2. Any without reinforcement		X	
3. Skipped or broken stitches·			
(a) In one eyelet			X
(b) In two eyelets		X	
4. Stitches more or less than specified.			
(a) One to three			X
(b) Four to seven		X	
(c) More than seven	X		
k. Buttonholes			
1. Any omitted, not specified type, size, uncut, purling not on the underside, or not securely caught in the cloth, stitching pulling away	X		
2. Skipped or broken stitches·			
(a) In one buttonhole			X
(b) In two buttonholes		X	
3. Stitches less than specified·			

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the currentversion before use.

TABLE IV (Continued)

Defects	Major	Minor	
		A	B
SEAMS AND STITCHING (Continued)			
(a) One to three			X
(b) Four to seven		X	
(c) More than seven	X		
4. Any end not securely tacked·			
(a) In one buttonhole			X
(b) In two buttonholes		X	
5. Gimp omitted in one or more buttonholes or not on the underside		X	
1. Buttons			
1. Any missing or loose		X	
2. Not specified size or style	1/		
3. Stitches more or less than specified			
(a) One			X
(b) Two		X	
(c) Three or more	X		
4. Shank missing on one or more buttons			X
5. Any surface rough, misaligned, distorted or contains nick, burr, sharp edge, or crack	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

TABLE IV (Continued)

Defect	Major	Minor	
		A	B
DETAILED DEFECTS APPLICABLE TO SPECIFIC PARTS OF THE HOOD			
FRONT OPENING			
a. Fronts uneven in length at the neck or at the bottom, when the slide fastener is closed			
1. More than 1/8 inch but not more than 1/4 inch			X
2. More than 1/4 inch		X	
b. Any facing short, tight, or twisted causing puckers or twist on the outerside of the fronts		X	
c. Flap not on right side		X	
HELMET SECTION			
a. Alpaca lining			
1. Tight, short, or twisted causing puckers or twist on the outerside of the hood	1/		
2. Pile side not exposed on any section	X		
b. Drawstrings·			
1. Less than 19-1/2 inches or more than 20-1/2 inches		X	
2. Not knotted at any end		X	
3. Not bar tacked to pile lining	X		
c. Storm flap·			
1. Top or underside twisted, puckered, or pleated		X	
2. Any edge crooked, underside exposed, or any corner not uniform in shape		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.

TABLE IV (Continued)

Defects	Major	Minor	
		A	B
HELMET SECTION (Continued)			
3. Off center			
(a). More than 1/4 inch but not more than 1/2 inch			X
(b) More than 1/2 inch		X	
4. Twisted or distorted, when buttoned back in position against the helmet portion		X	
5. Any interlining missing, tight, short, pleated, or twisted causing twist or puckers on the top or underside of the flap		X	
6. Closure loop			
(a) Missing, misplaced, or dimensions not as specified (see Figure 6, View G).		X	
LABEL			
a. Missing, incorrect, incomplete, or illegible	X		
b. Misplaced, off center by more than 1/2 inch, stitching omitted on one or more edges, or appear on the exterior of the hood			X
c. Less than 1/4 inch or more than 1/2 inch below the alpaca pile lining and neck facing joining seam (see Figure 8)			X

1/ The defect shall be classified major, when it seriously affects the serviceability or appearance, otherwise it is to be classified as a minor A defect.

2/ The slide fastener shall be checked for proper function, by opening and closing the slide fastener, at least three times, along its full length.

3/ With the slide fastener fully open, one end of the thong shall be grasped, by one hand, and normal hand force shall be applied, causing the slider to move, closing the slide fastener along its entire length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4/ Each snap fastener shall be checked for proper function and attachment by snapping closed and unsnapping each snap fastener at least three times.

5/ The defect shall be classified minor A, when it seriously affects the serviceability or appearance, otherwise it is to be classified as a minor B defect.

6/ The gage of stitching defect shall be classified only, when the condition exists for more than 2 inches on any row of stitching.

7/ A seam shall be classified as open, when one or more stitches, joining a seam, are broken or when two or more continuous skipped stitches or run-offs occur. On double stitched seams, a seam shall be classified as open, when either one or both sides of the seam contain any of the aforementioned for a single stitched seam.

8/ Any edge that should be turned under and is not, but is securely caught in the stitching, shall be classified as a raw edge. Any raw edge, that is not securely caught in the stitching, shall be classified as an open seam.

9/ A seam shall be classified as loose, when the top and bobbin threads are on the same surface.

10/ Puckering is evidence of tight tension or gathering of the material. When puckering is evident, and is not caused by the gathering of the material, the stitching shall be inspected for tight tension and breaking of stitches by exerting normal pull in the lengthwise direction of the stitching, by pulling the material taut, to straighten out the seam. Puckering due to the gathering of the material shall be classified as an accuracy of seaming defect.

11/ The stitches per inch defect shall be classified only, when the condition exists for more than 3 inches on any row of stitching.

TABLE V. List of defects for the dimensions of the assembled hood.

Finished measurements	Defect
MEASURE a to f, inclusive	Any measurement deviating from the measurements specified in 3.4 and Table II and applicable tolerances shall be enumerated as a dimensional defect.

4.4.2.2 Packaging. Each of the fully prepared shipping containers, containing hoods, selected as a sample unit from the lot, shall be visually

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

examined to determine that the packaging, packing, and marking conform to this specification. The list of defects, Table VI, shall be used to enumerate the defects found.

TABLE VI. List of defects for packaging.

Item	Defect
Exterior and Interior Markings	Missing, incorrect, incomplete, illegible; of improper size, location sequence or method of application; information on the paper label, in any polyethylene bag, not readable through the film or no label in the polyethylene bag.
Materials	Any nonconforming component; any component or component part missing, damaged, or otherwise defective.
Workmanship	Inadequate application of the components such as incomplete closure of any container flap or loose strapping; bulging or distortion of any container; any shipping container contains any metal fastening or stitches; any polyethylene bag damaged, any vent hole missing, or any open or non-continuous heat sealed seams.
Exterior and Interior	Gross or net weight exceeds the requirement; number per container more or less than specified; any portion of the hood caught in any heat sealed seam; not individually packaged within the polyethylene bag or any deformed, distorted, or bent in the bagged condition.

4.4.3 Procedure for measuring. The hood to be measured shall be fully zippered (slide fasteners in their closed positions) and the snap fastener shall be properly engaged and snapped together. The hood shall be laid flat, without tension, on a smooth, flat surface so that any creases and wrinkles will not affect the measurement. The hood shall be measured as follows:

a. Measure horizontally from inner edge of mouton to fold at center back of hood, at widest point, as specified in Figure 3.

b. Measure the width of the storm flap from inner edge of fur ruff to finished edge of flap, as specified in Figure 3.

c. Measure the width of the closure flap from inside edge of mouton to rear edge of closure flap as specified in Figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

d. Measure the length of the center of the back, from the helmet attaching seam to the bottom, as specified in Figure 2.

e. Measure the total length of the mouton, from edge to edge, along the attaching seam, as specified in Figure 1.

f. Measure the total length of the synthetic fur, from edge to edge, along the attaching seam, as specified in Figure 2.

5. PACKAGING

5.1 Packaging. Packaging shall be Level A or C, as specified (see 6.2).

5.1.1 Level A. The front opening slide fastener shall be fully closed, the hood opening slide fastener shall be fully open, and the snap fastener shall be properly engaged and snapped together.

a. Place the hood face up in a fully outstretched position.

b. Fold the hood in half lengthwise.

c. Fold in half by bringing the top to the bottom. The approximate size of the folded hood shall be 11-1/2 by 14-1/2 inches.

d. The mouton, when not synthetic, shall be sprinkled, with approximately 2 ounces of napthalene flakes.

A paper label shall be inserted (see 5.3.1) and each folded hood shall be individually heat sealed within a clear polyethylene bag of 0.00125 ±.00025 inch film. The heat seal seams shall be straight, continuous, and parallel to each other and the edges of the polyethylene bag. The closing heat seal seam, of the bag, shall be as close as possible to the edge of the bag. No hood shall be deformed, distorted, or bent in the bagged condition nor shall the polyethylene bag be damaged. No part of any hood shall be caught in any heat sealed seam. One corner of each bag shall contain a hole, 1/4 inch in diameter, to allow the excess air to escape. As an alternate, the final closure of the bag may be accomplished by use of a tuck or reverse flaps. The approximate flat size of the polyethylene bag shall be 13 by 17 inches.

5.1.2 Level C. The hoods shall be folded and packaged to afford the minimum degree of protection necessary to prevent deterioration or damage during shipment under normal environmental conditions and commercial modes of transportation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be Level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Thirty hoods packaged as specified in 5.1.1, shall be packed as specified in 5.2.2, except that the fiberboard container shall be Weather Resistant Class, Variety SW, Grade V3c or V3s. In addition, each container shall be reinforced with flat steel strapping or tape banding in accordance with the appendix to PPP-B-636.

5.2.2 Level B. Thirty hoods, packaged as specified in 5.1.1, shall be packed within a fiberboard container, approximately 23-1/2 by 15 by 15 inches, conforming to PPP-B-636, Style OSC, Type CF or SF, Domestic Class, Variety SW, Grade 275. The bagged hoods shall be placed in the container as follows:

a. In two equal tiers.

b. The long dimension of the folded hood shall be parallel to the end panels of the container.

c. Every other hood shall be in a reverse position to the one on the top of it.

The top and bottom of the contents, of each shipping container, shall be completely covered with a sheet of 30 pound minimum basis weight kraft paper conforming to UU-P-268, Grade B. The body joint and the top and bottom flaps shall be firmly glued together as specified in PPP-B-636. The fiberboard container shall not contain any metal fastenings or stitches. Each container shall be constructed and closed in accordance with the appendix to PPP-B-636.

5.2.3 Level C. The hoods, packaged as specified in 5.1, shall be packed within exterior type shipping containers in a manner that will insure safe transportation, at the lowest rate, to the point of delivery. The shipment shall conform to the minimum requirements, of the rules and regulations, applicable to the mode of transportation selected.

5.3 Marking. In addition to any special marking required by the contract or order, (see 6.2(d)), the exterior fiberboard containers shall be marked in accordance with MIL-STD-129 and shall include the date of manufacture (month and year).

5.3.1 Polyethylene bag. Prior to heat sealing, a white paper label, with legible and durable black letters and numerals, shall be placed inside each polyethylene bag. The label shall be placed so that the information, on the label, will be capable of being read through the bag. The paper label shall contain the same information as specified in 5.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The hoods covered by this specification are intended, for use by flight personnel, to cover the head and neck, for cold weather protection.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number, and date of this specification.

b. Quantity desired.

c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

d. Whether any special markings are required (see 5.3).

6.3 Availability for the standard shade of Sage Green USAF Color No. 1565. The standard shade, for the Sage Green USAF Color Shade No. 1565, will be furnished by the contracting officer.

6.4 Data. For the information of contractors and contracting officers, any of the data, specified in the applicable documents, listed in Section 2 of this specification, or any referenced lower-tier documents, need not be prepared for the Government and shall not be furnished to the Government, unless specified in the contract or order. The data, to be furnished, shall be listed on DD Form 1423 (Contractor Data Requirements List), which shall be attached to and made a part of the contract or order. NavWeps Form 4200/25 (Drawings, Lists, and Specifications Required) shall be attached, where applicable.

6.5 Supersession data. This specification supersedes the requirements of MIL-H-18374B(AS) dated 17 April 1970.


Custodians:
Army - GL
Navy - AS
Air Force - 82

Preparing activity:
Navy - AS
(Project No. 8415-0988)

Review activities:

User interest:
Navy - SA


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

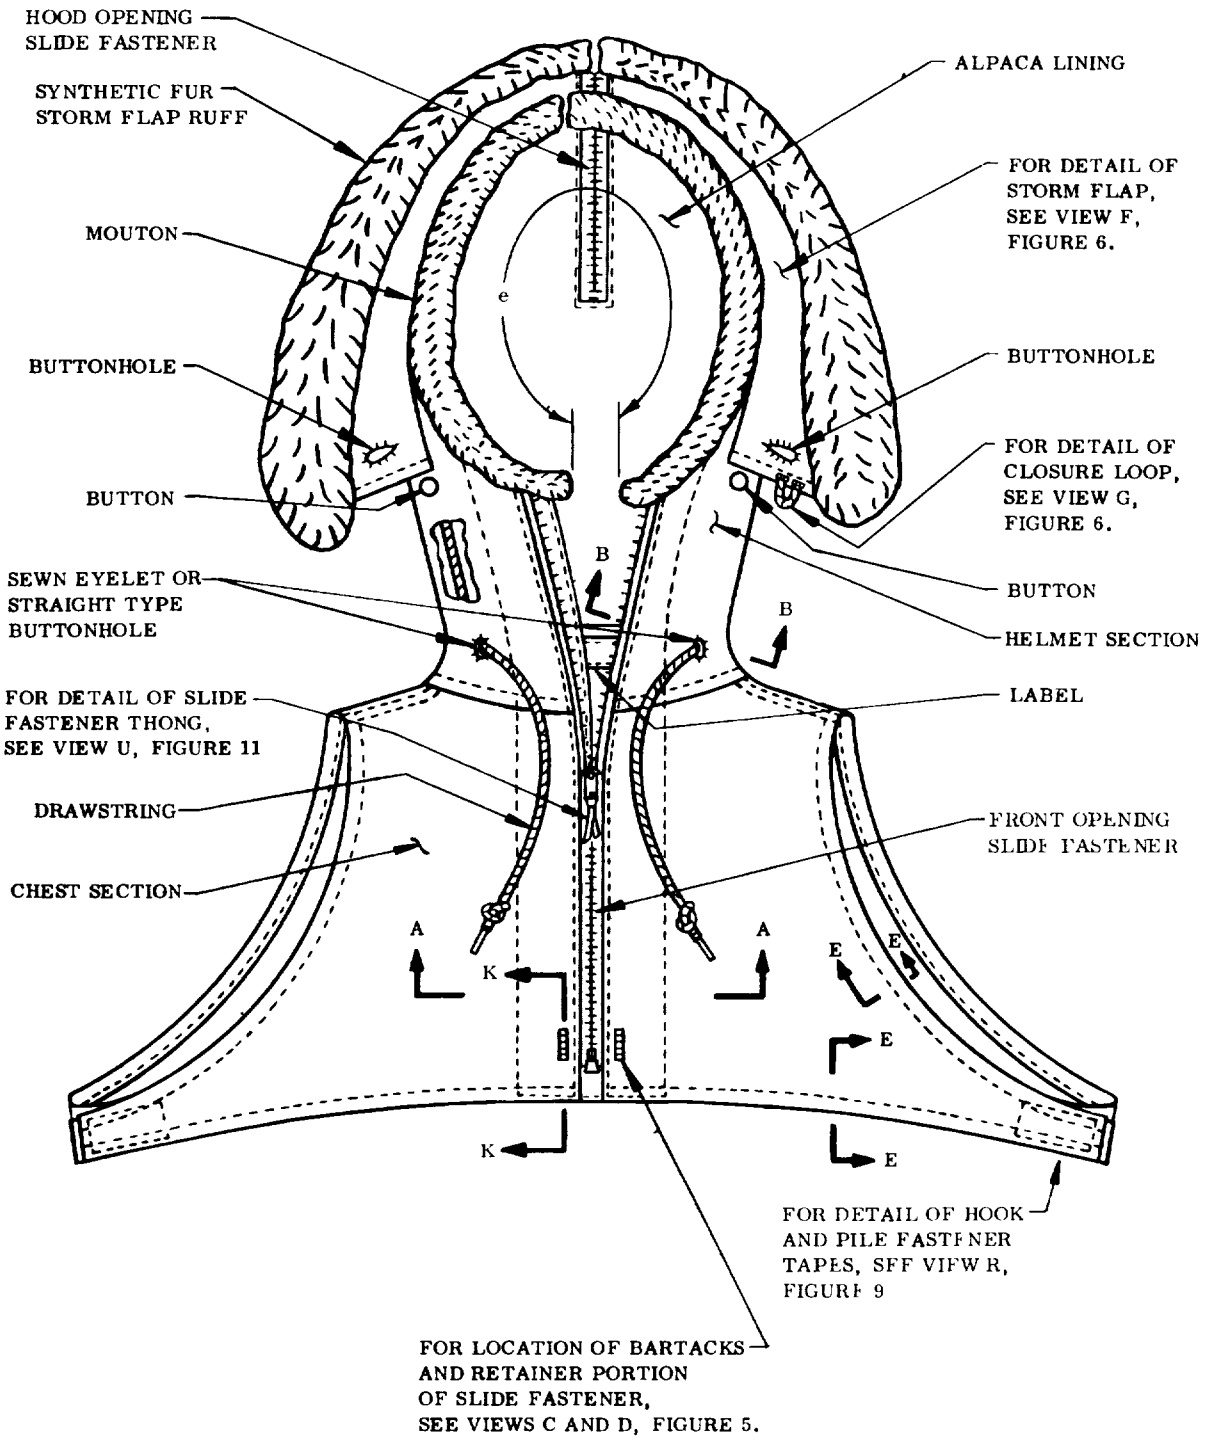

FOR SECTIONS A-A AND B-B, SEE FIGURE 4.
FOR SECTION E-E, SEE FIGURE 5
FOR SECTION K-K, SEE FIGURE 7

FIGURE 1. Front


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.

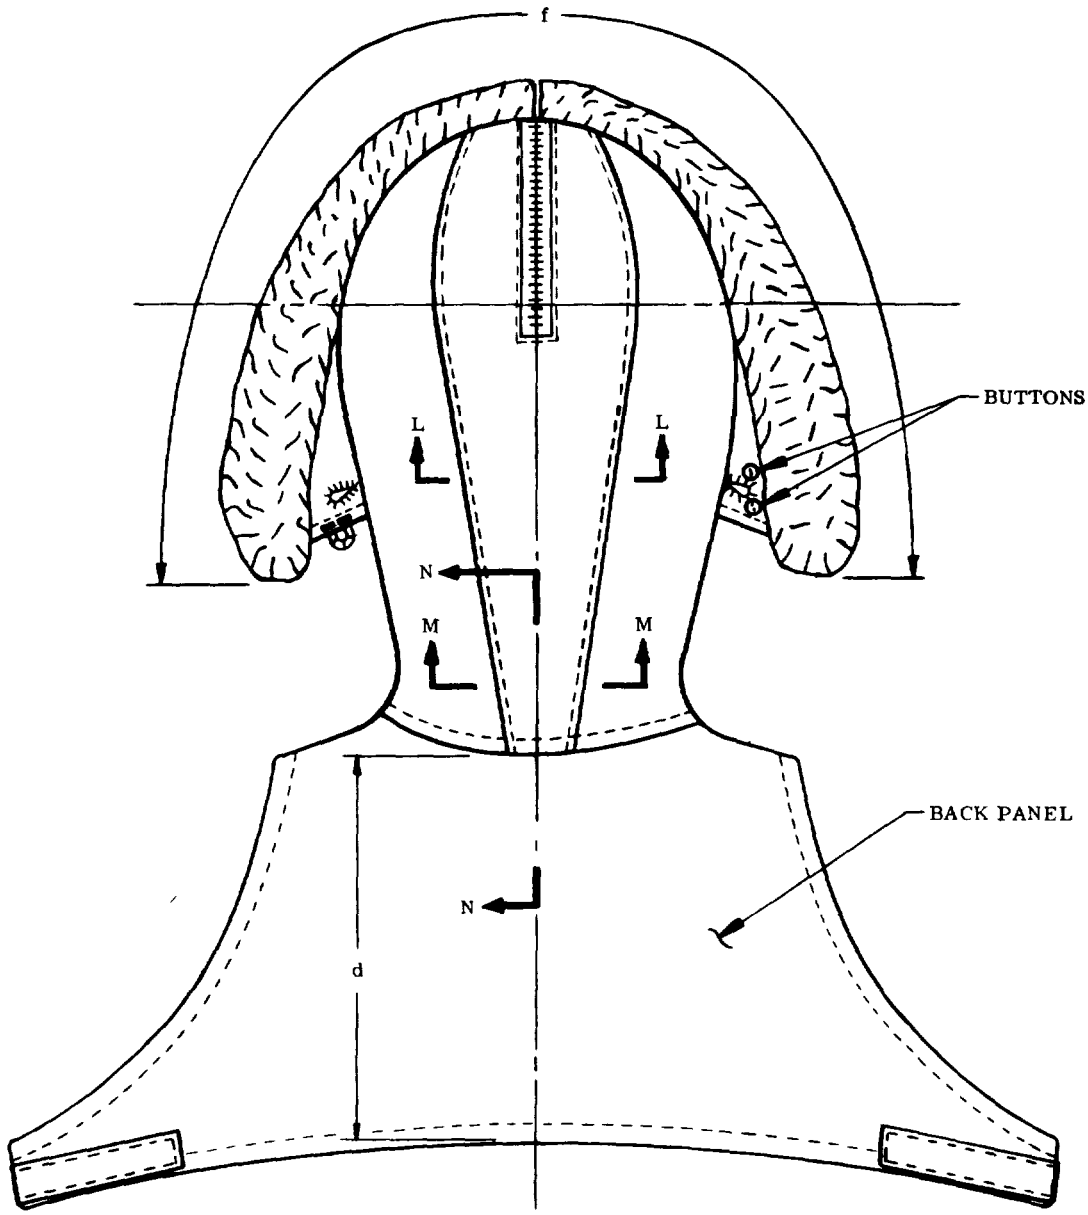

FOR SECTION L-L, SEE FIGURE 7.
FOR SECTIONS M-M AND N-N, SEE FIGURE 8.

FIGURE 2. Back

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

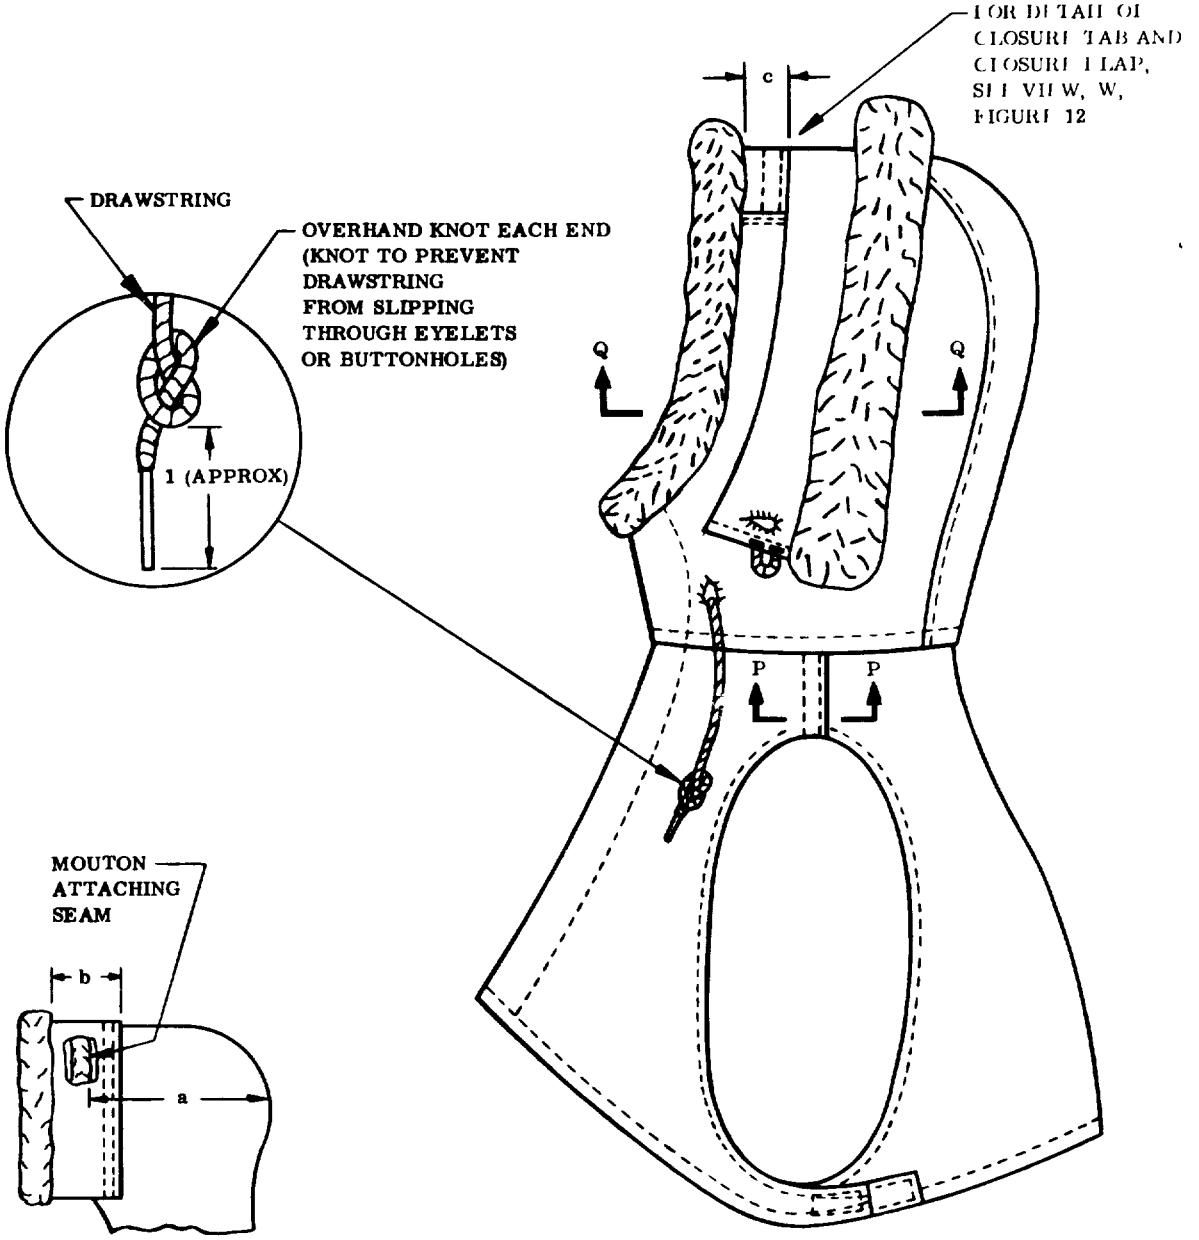

VIEW OF HELMET WITH STORM FLAP FORWARD


DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ON DIMENSIONS SHALL BE AS FOLLOWS

DIMENSIONS	TOLERANCES
0 TO 1/2 INCL	±1/32
OVER 1/2 TO 1 INCL	±1/16


FOR SECTIONS P-P AND Q-Q, SEE FIGURE 9.

FIGURE 3. Side

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.

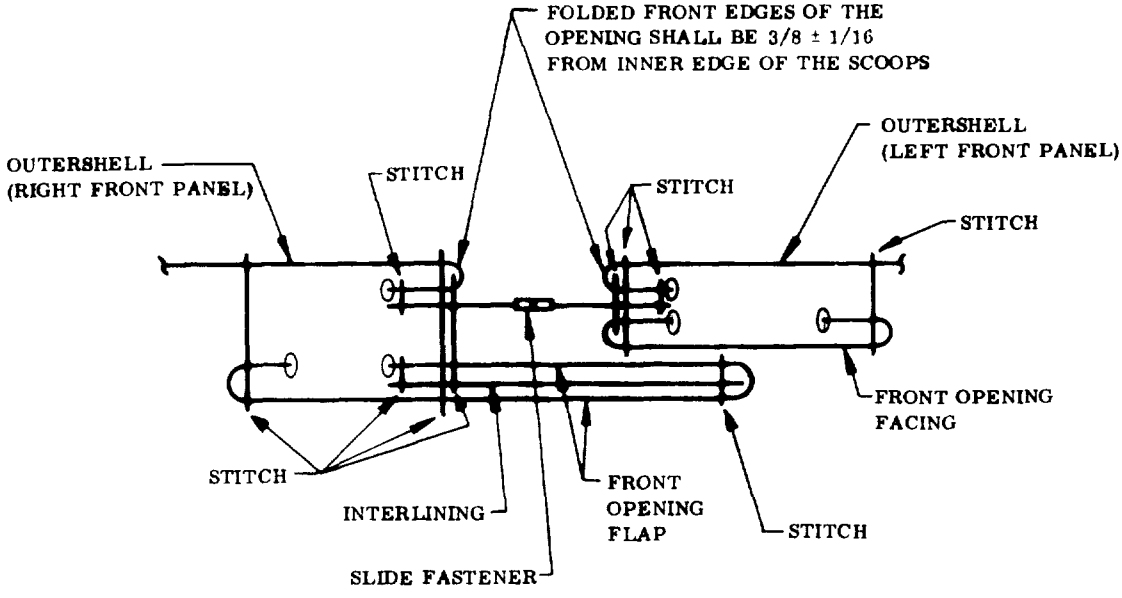

SECTION A-A

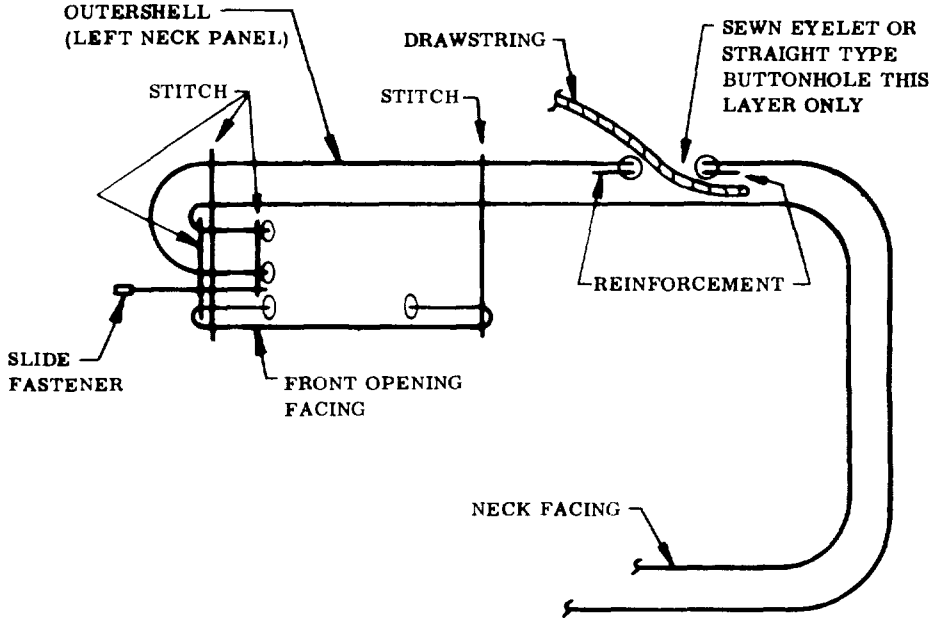


SECTION B-B

DIMENSION IN INCHES


⬭ - OVEREDGE STITCHING

FIGURE 4. Construction details


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

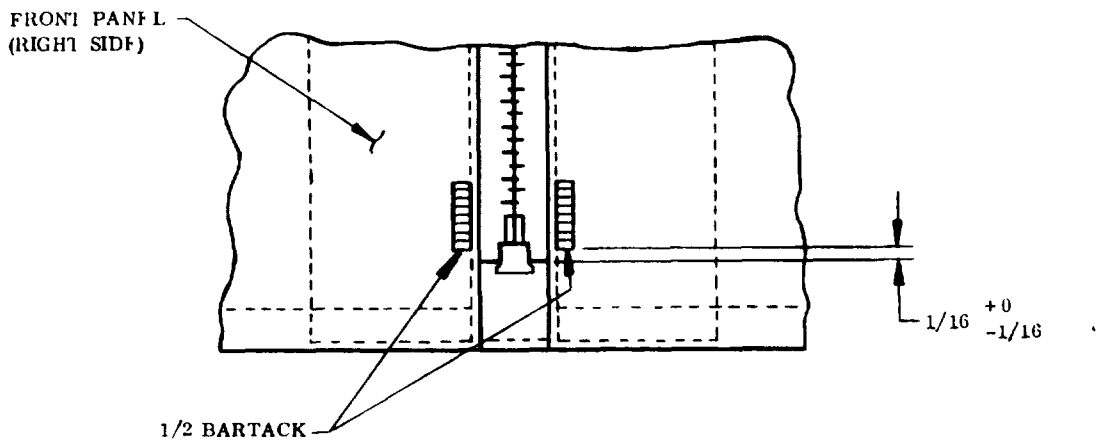

VIEW C

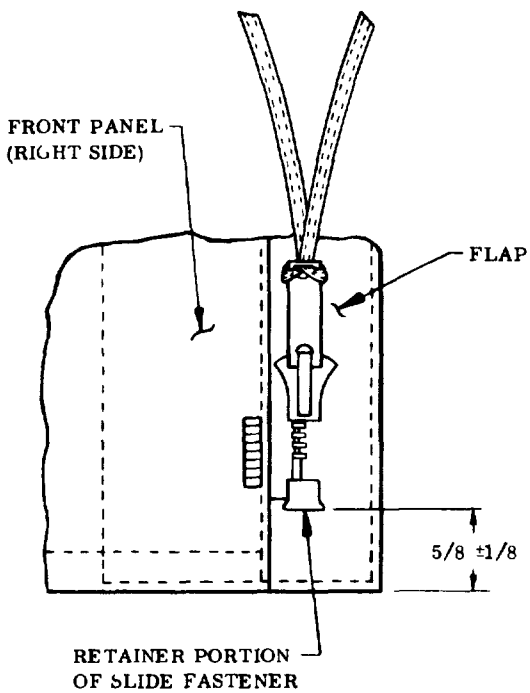

VIEW D
(HOOD OPEN)




SECTION E-E

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED,
TOLERANCES SHALL BE AS
SPECIFIED IN FIGURE 3


⬭ OVERFDGE STITCHING

FIGURE 5. Construction details


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

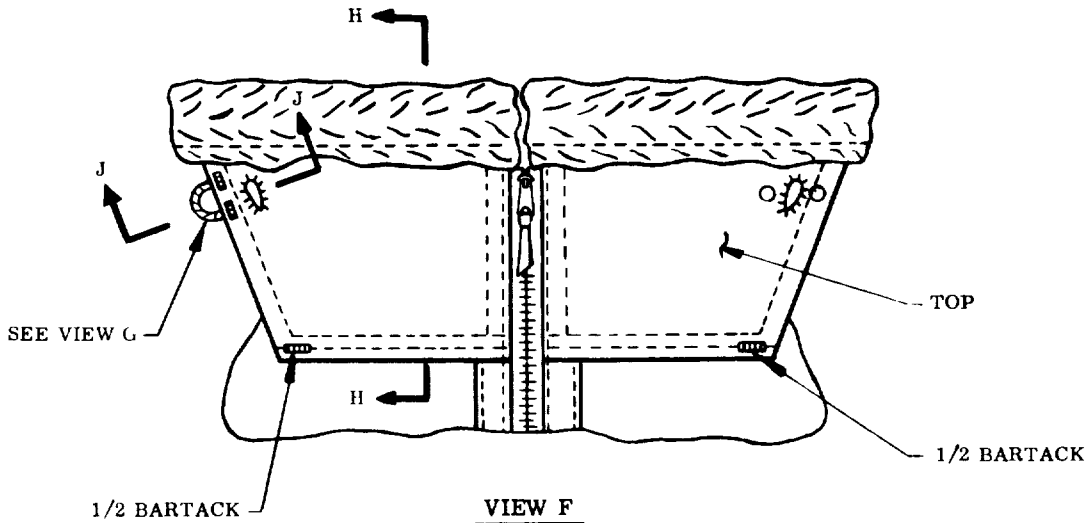

VIEW F
VIEW WITH STORM FLAP FORWARD

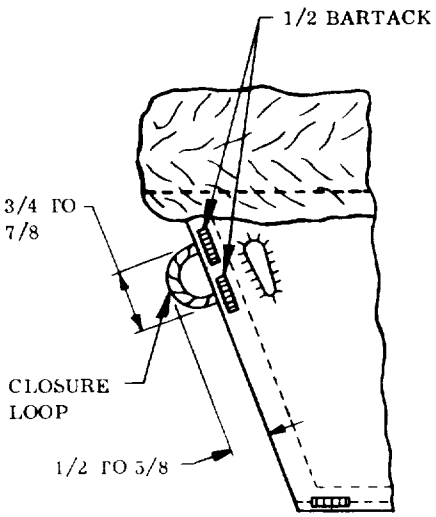

VIEW G

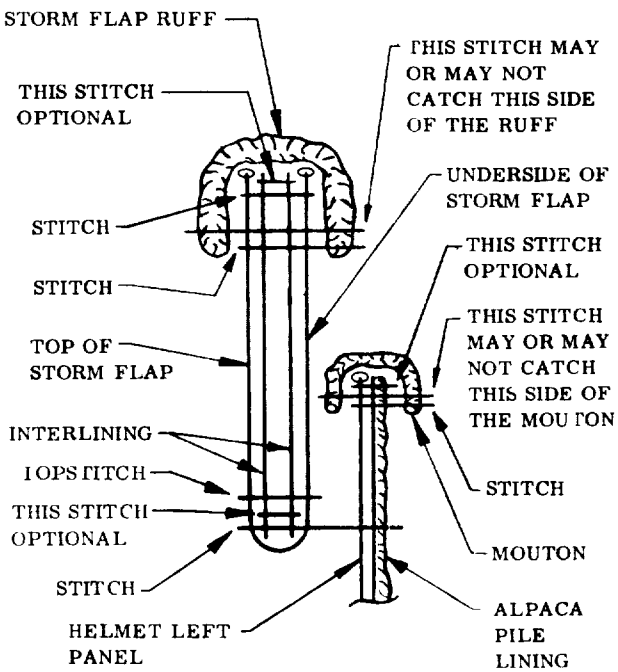


SECTION H-H


DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 3
⬭ OVEREDGE STITCHING
FOR SECTION J-J, SEE FIGURE 7

FIGURE 6. Construction details


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.

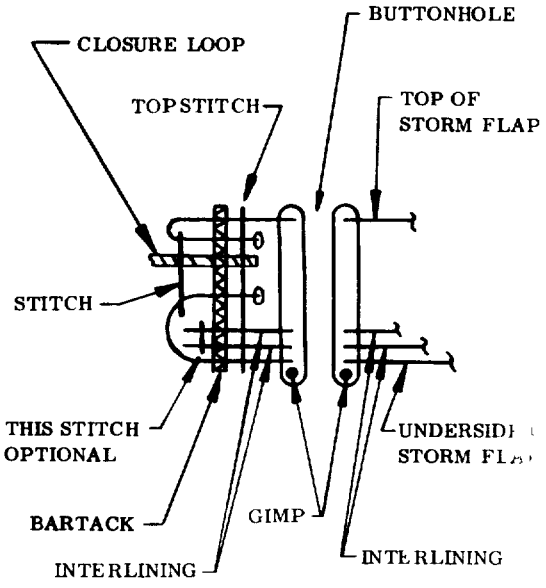

SECTION J-J

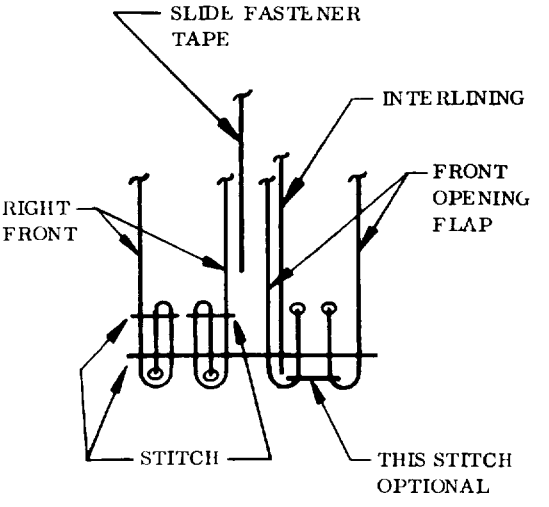

SECTION K-K
(BARTACK SYMBOL NOT SHOWN FOR CLARITY)

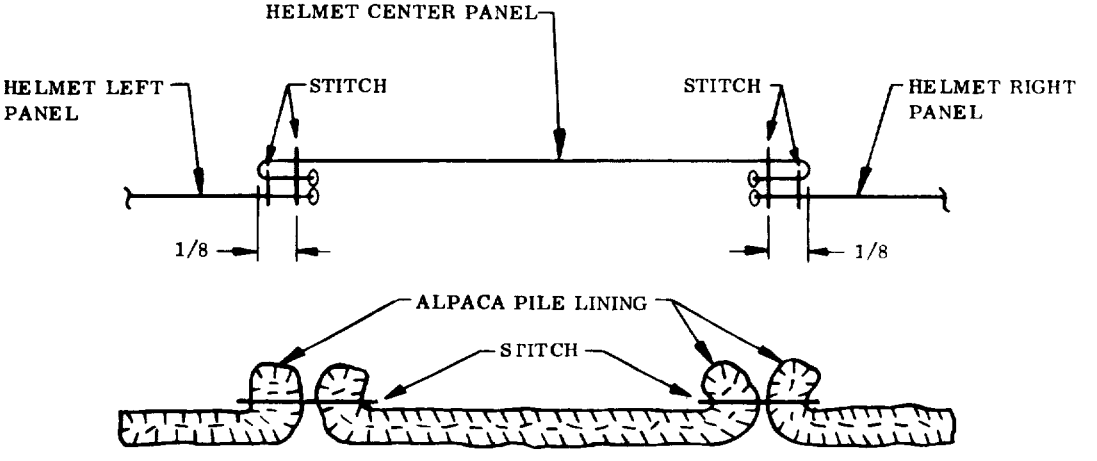


SECTION L-L

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 3.


⬭ OVEREDGE STITCHING

FIGURE 7. Construction details

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.

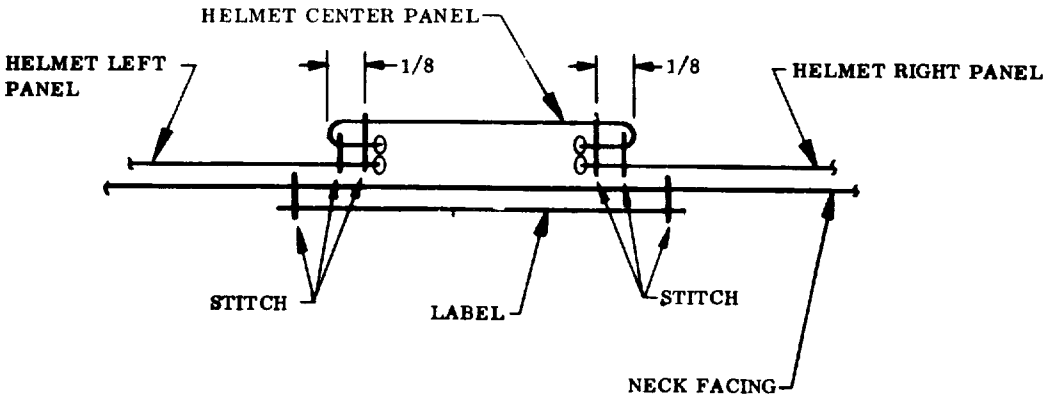

SECTION M-M

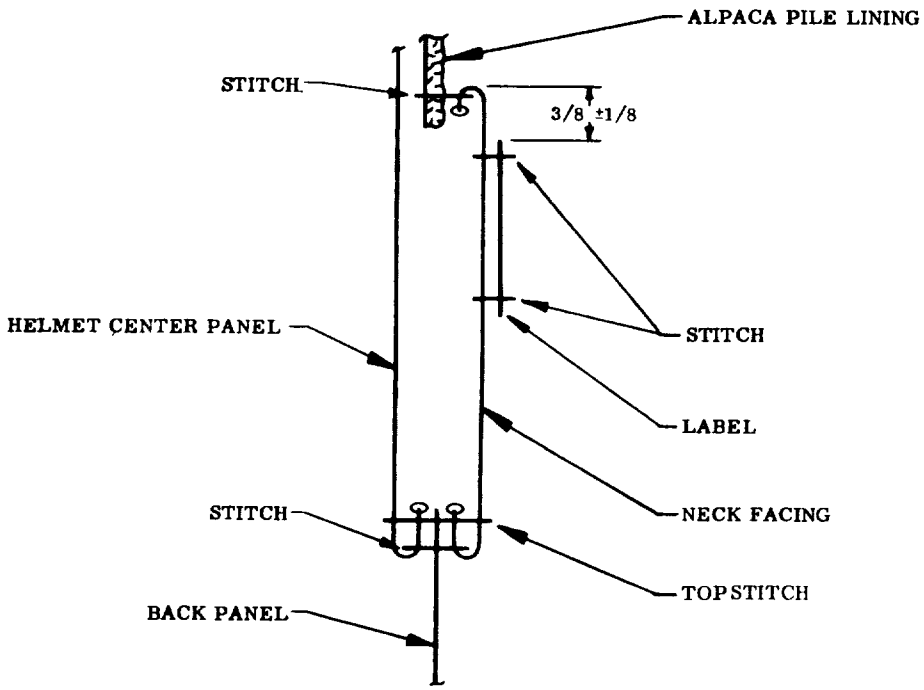


SECTION N-N

DIMENSIONS IN INCHES


⬭ = OVEREDGE STITCHING

FIGURE 8. Construction details


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

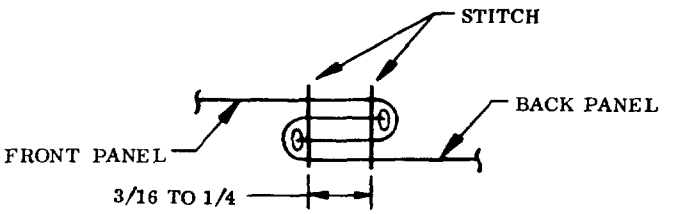

SECTION P-P

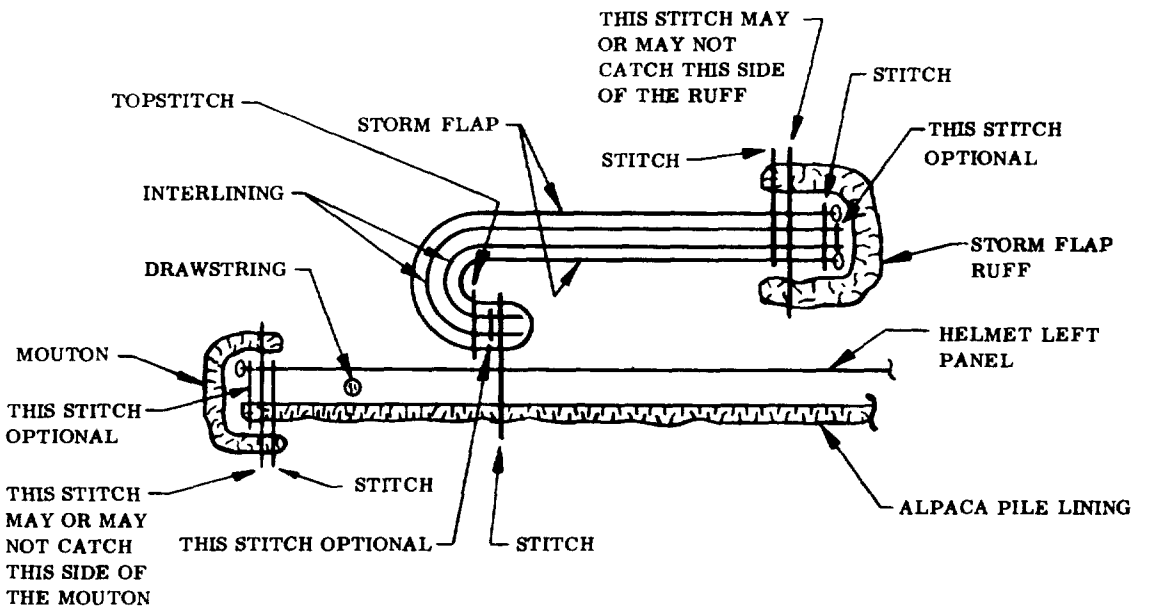

SECTION Q-Q

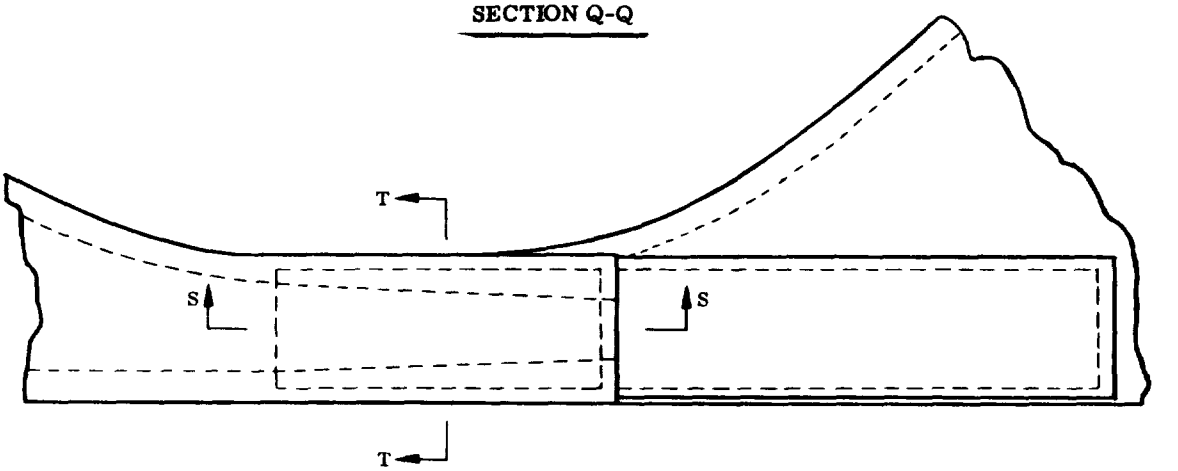


VIEW R


DIMENSIONS IN INCHES
⬭ OVEREDGE STITCHING
FOR SECTIONS S-S AND T-T, SEE FIGURE 10.

FIGURE 9. Construction details

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.

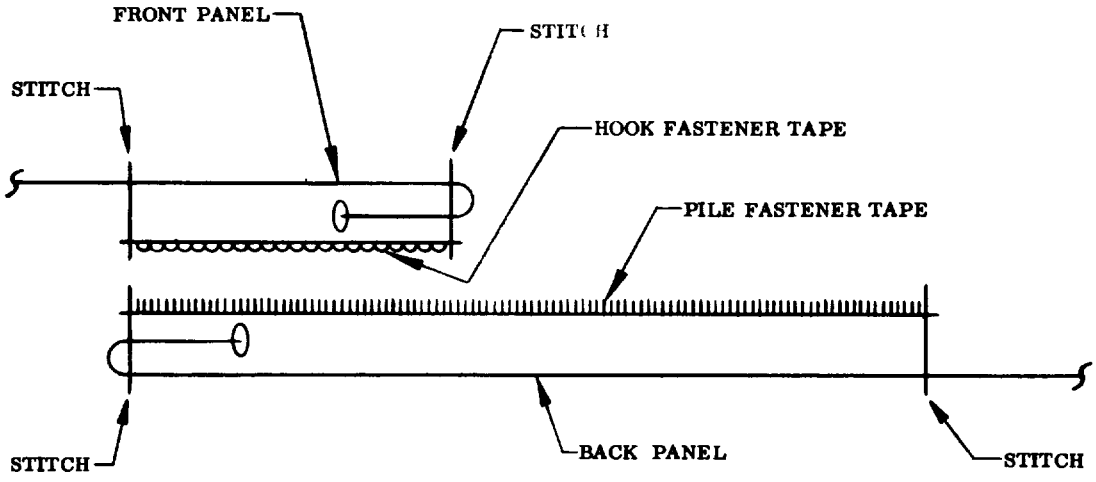

SECTION S-S

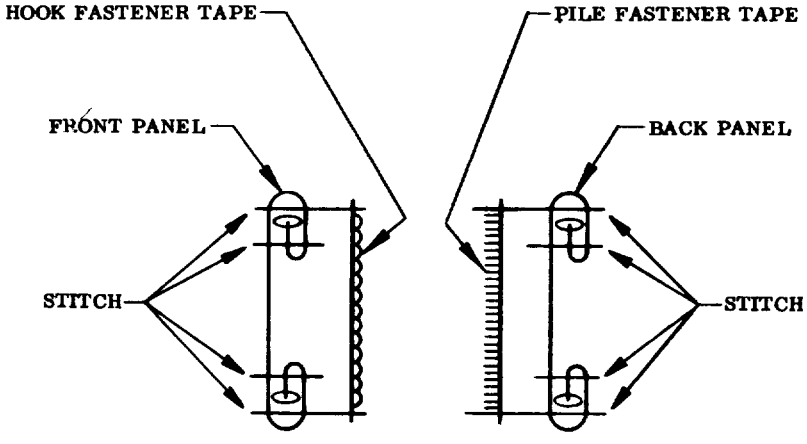


SECTION T-T


⬭ = OVEREDGE STITCHING

FIGURE 10. Construction details

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

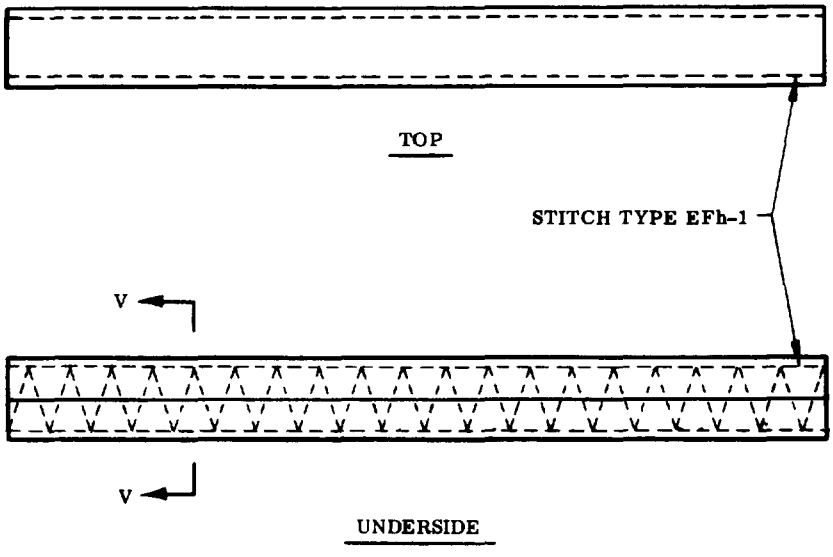


VIEW U




SECTION V-V

FIGURE 11. Thong construction details

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.

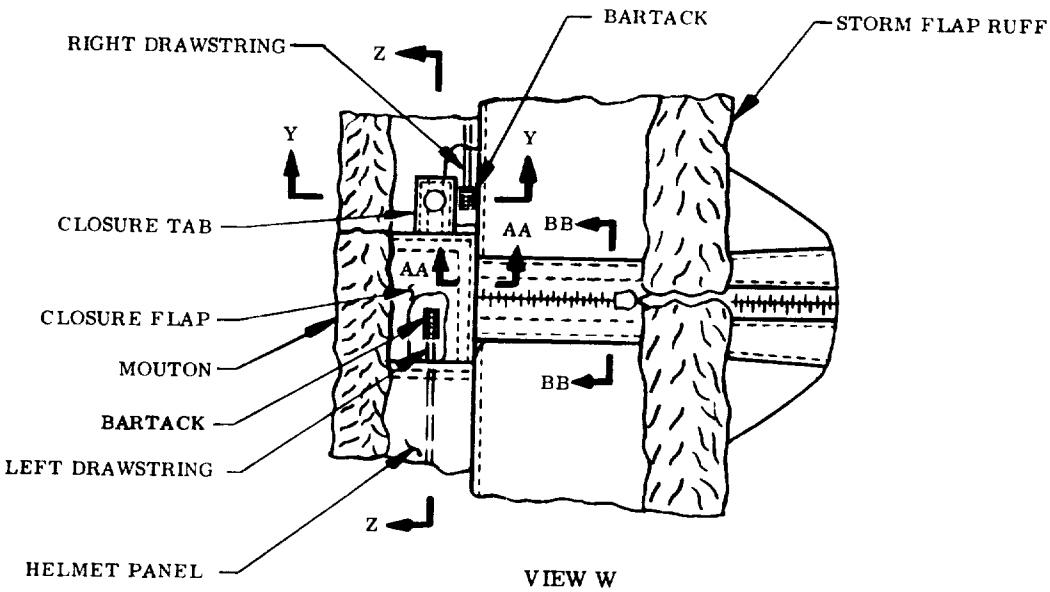

VIEW W

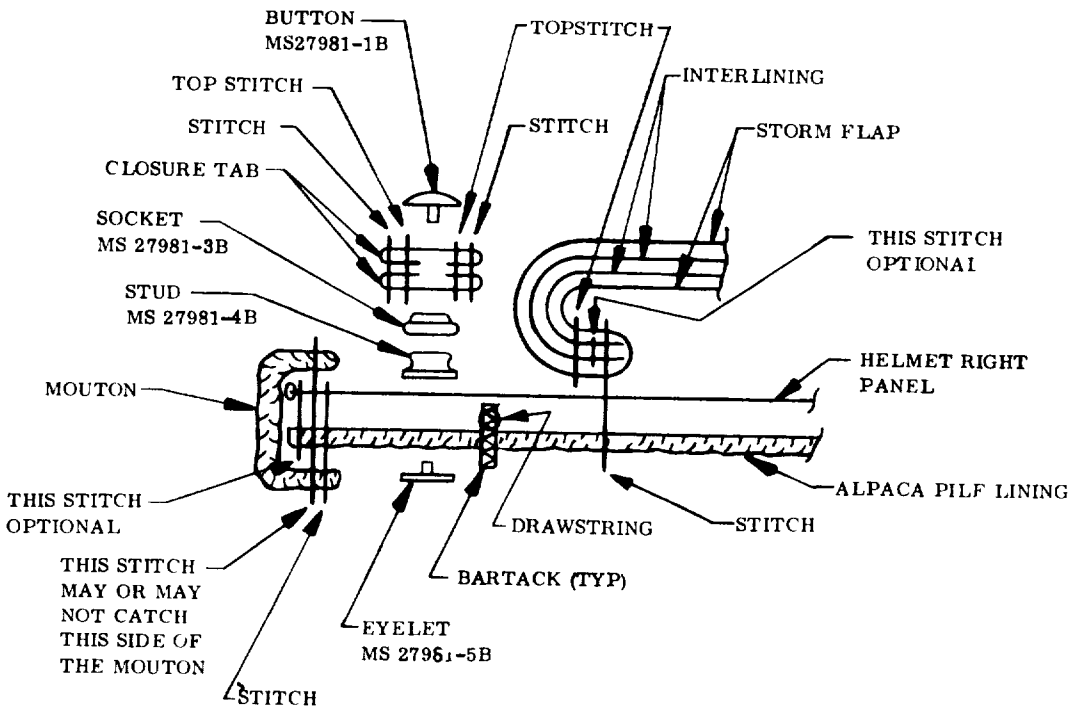


SECTION Y-Y


⬭ OVEREDGE STITCHING

FOR SECTIONS Z-Z, AA-AA, AND BB-BB, SEE FIGURE 13

FIGURE 12. Construction details

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

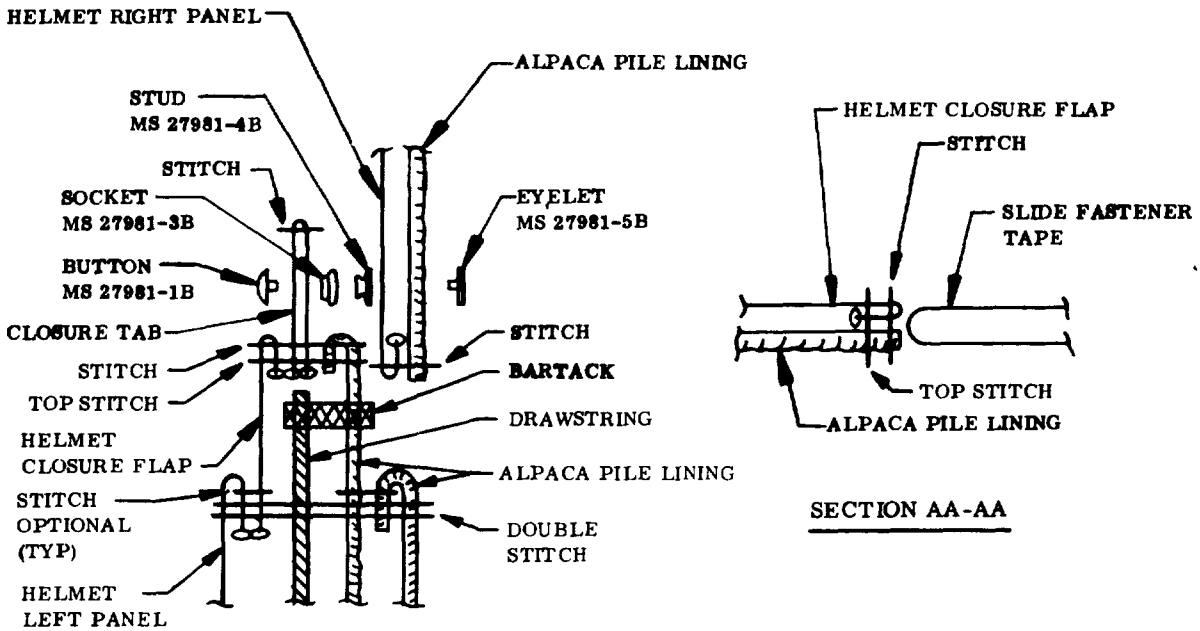

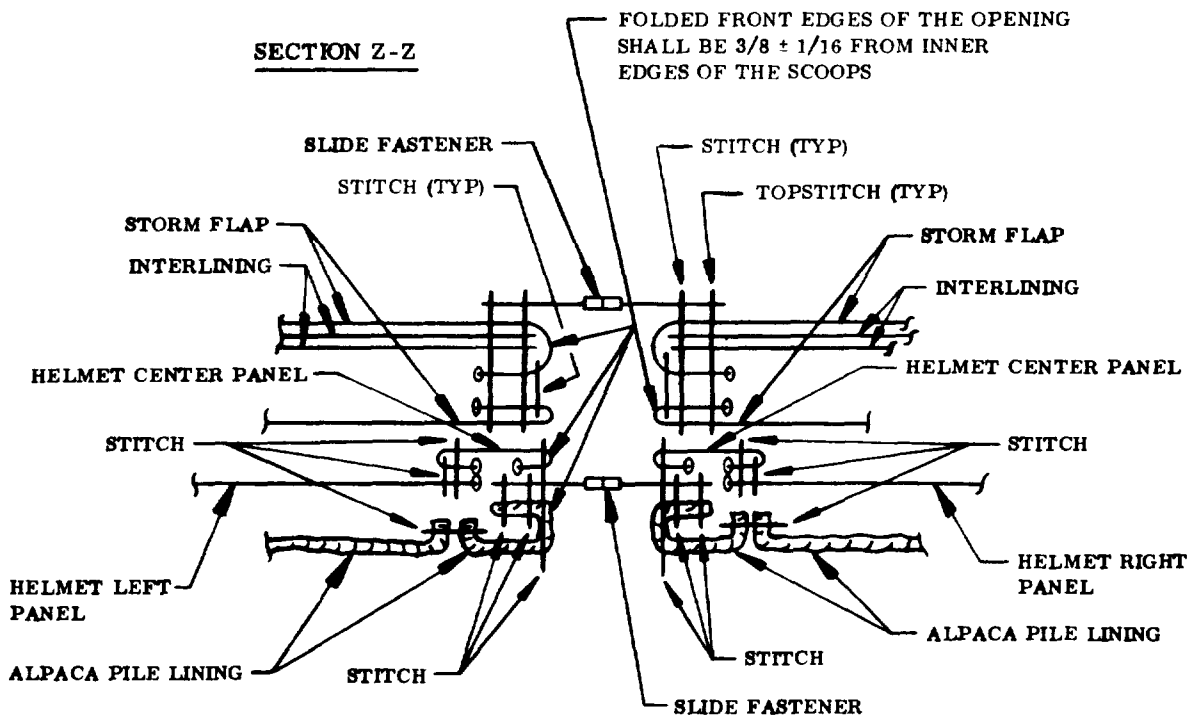

SECTION BB-BB
SECTION ROTATED 90° CLOCKWISE

⬭ = OVEREDGE STITCHING

FIGURE 13. Construction details

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

INDEX

Contents	Paragraph	Page
APPLICABLE DOCUMENTS	2.	1
AVAILABILITY FOR THE STANDARD SHADE OF SAGE GREEN USAF COLOR NO. 1565	6.3	26
CLASSIFICATION OR LIST OF DEFECTS		
Assembled dimensions	Table V	22
Packaging	Table VI	23
Visual examination of the hoods:	Table IV	12
Detailed defects applicable to specific parts:	Table IV	20
Front opening	Table IV	20
Helmet section:	Table IV	20
Alpaca lining	Table IV	20
Drawstrings	Table IV	20
Storm flap	Table IV	20
Closure loop	Table IV	21
Label	Table IV	21
Material defects and workmanship damages:	Table IV	12
Cleanness	Table IV	14
Components and assembly	Table IV	14
General	Table IV	12
Metallic components:	Table IV	12
Slide fastener	Table IV	12
Snap fasteners	Table IV	13
Mouton, synthetic fur, or alpaca	Table IV	13
Seams and stitching:	Table IV	15
Accuracy of seaming	Table IV	15
Bartacks	Table IV	18
Buttons	Table IV	19
Buttonholes	Table IV	18
Gage of stitching	Table IV	15
Open seams	Table IV	15
Raw edges	Table IV	16
Run-offs, skipped, or broken stitches	Table IV	16
Seam and stitch type	Table IV	17
Sewn eyelets	Table IV	18
Stitch tension	Table IV	17
Stitches per inch	Table IV	17
Shaded parts	Table IV	14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

INDEX (Continued)

Contents	Paragraph	Page
INSPECTION	4.2	10
Quality conformance inspection	4.3	10
CONSTRUCTION	3.3	5
Cutting	3.3.1	5
Seams and stitching:	3.3.3	6
Attaching of the buttons:	3.3.3.2	7
Hand sewing	3.3.3.2.1	7
Machine sewing	3.3.3.2.2	7
Bartacking	3.3.3.5	8
Buttonholes	3.3.3.3	7
Overedge stitching	3.3.3.6	8
Sewing	3.3.3.1	6
Sewn eyelets	3.3.3.4	7
Shade marking:	3.3.2	6
Adhesive shade marking tickets	3.3.2.1	6
Bundling method	3.3.2.2	6
CONSTRUCTION DETAILS	3.3.4	8
DATA	6.4	26
DESIGN	3.2	5
DIMENSIONS	3.4	8
FIGURES	1 to 13	27 to 39
INSPECTION METHODS	4.4	11
Color matching	4.4.1	11
Procedure for measuring	4.4.3	23
Visual examination:	4.4.2	12
Hood	4.4.2.1	12
Packaging	4.4.2.2	22
INTENDED USE	6.1	26
ISSUES OF DOCUMENTS	2.1	1
LABEL	3.5	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

INDEX (Continued)

Contents	Paragraph	Page
MATERIALS AND COMPONENTS	3.1	3
Buttons	3.1.9	5
Cloth:	3.1.1	3
Front opening and neck facings, thong, eyelet reinforcement, and front opening and storm flaps	3.1.1.4	3
Interlining	3.1.1.3	3
Lining	3.1.1.2	3
Outershell	3.1.1.1	3
Closure loop	3.1.10	5
Drawstrings	3.1.4	4
Fastener tapes	3.1.11	5
Gimp	3.1.8	5
Mouton	3.1.6	4
Slide Fasteners	3.1.2	3
Snap fasteners	3.1.5	4
Thread	3.1.7	5
Synthetic fur	3.1.3	4
ORDERING DATA	6.2	26
PATTERNS	3.7	9
Pattern parts	3.7.1	9
PACKAGING	5.	24
Marking:	5.3	25
Polyethylene bag	5.3.1	25
Packaging:	5.1	24
Level A	5.1.1	24
Level C	5.1.2	24
Packing:	5.2	25
Level A	5.2.1	25
Level B	5.2.2	25
Level C	5.2.3	25
QUALITY CONFORMANCE INSPECTION	4.3	10
Sampling:	4.3.1	10
Inspection lot:	4.3.1.1	10
Hoods	4.3.1.1.1	10
Packaging	4.3.1.1.2	10
Sampling for examinations and tests of the hoods and packaging	4.3.1.2	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

INDEX (Continued)

Contents	Paragraph	Page
RESPONSIBILITY FOR INSPECTION	4.1	10
SCOPE	1.1	1
SUPERSESSION DATA	6.5	26
WORKMANSHIP	3.6	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.