MILITARY SPECIFICATION

OVENS, FOOD WARMING, ELECTRICAL (12 MEAL)

1. SCOPE

1.1 Scope. This specification covers two types of electrically heated, forced air circulating, 12 meal, food warming ovens.

1.2 Classification.

1.2.1 Type.

Type I - 115/208 volt AC, 400 Hz, 3 phase, 4 wire, "Y" connected, grounded neutral
Type II - 28 volt DC, 2 wire, grounded electrical power system

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-A-250/2	Aluminum Alloy 3003, Plate and Sheet
QQ-A-250/8	Aluminum Alloy 5052, Plate and Sheet
QQ-B-626	Brass, Leaded and Unleaded: Rod, Shapes, Forgings, and Flat Products with Finished Edges (Bar and Strip)
QQ-B-654	Brazing Alloy, Silver
QQ-S-766	Steel Plates, Sheets, and Strip Corrosion Resisting
PPP-F-320	Fiberboard, Corrugated and Solid Sheet Stock (Container Grade, Cut Shapes)
PPP-B-636	Box, Fiberboard
ZZ-R-765	Rubber, Silicone, Low and High Temperature and Tear Resistant

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

Military

MIL-P-116	Preservation, Methods of
MIL-D-1000	Drawings, Engineering and Associated Lists
MIL-W-8604	Welding of Aluminum Alloys: Process for
MIL-S-12204	Solder, Aluminum Alloy
MIL-M-13966	Meals, Precooked Frozen

STANDARDS

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-143	Specifications and Standards, Order of Precedence for the Selection of
MIL-STD-147	Palletized and Containerized Unit Loads, 40" X 48" Pallets, Skids, Runners, or Pallet-Type Base
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-781	Reliability Tests Exponential Distribution
MIL-STD-785	Requirements for Reliability Program (for Systems and Equipment)
MIL-STD-882	Systems Safety Program, for Systems and Associated Subsystems and Equipment; Requirements for
MIL-STD-889	Dissimilar Metals

DRAWINGS

RED Dynamics Division Universal Oil Products

104E1000	Whirlwing Oven Assembly

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

JOINT COMMITTEE ON FOOD EQUIPMENT STANDARDS

National Sanitation Foundation Standard No 1
National Sanitation Foundation Standard No 2

(Application for copies should be addressed to the Joint Committee on Food Equipment, Ann Arbor, MI 48106.)

3. REQUIREMENTS

3.1 First article. This specification provides for first article testing.

3.2 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.3 Materials. The materials used in the construction of the ovens shall be of the lightest weight possible and consistent with all of the requirements specified herein. All parts shall be fabricated of materials which are not susceptible to damage of any kind from exposure to extremes of temperature and humidity as well as any other environmental conditions specified herein. Materials that can impart flavor or odor to food or cause any toxic conditions shall not be used. Materials used shall be insect proof and have minimum hydroscopic tendencies. Materials not specified herein or on drawings shall be the same as used on the manufacturer's standard product.

3.3.1 Fungus-proof materials. Materials that are nutrients for fungi shall not be used where it is practical to avoid them. Where used and not hermetically sealed, they shall be treated with a suitable fungicidal agent; however, fungicidal treatment will not be necessary if they are used in a hermetically sealed enclosure.


3.3.2 Metals. Metals shall be of the corrosion-resistant type or suitably treated to resist corrosion due to fuels, salt spray, or atmospheric conditions likely to be met in storage or normal service. Magnesium or magnesium alloys shall not be used.

3.3.2.1 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.


3.4 Sanitation. The ovens shall conform to the requirements of the National Sanitation Foundation Standards No 1 and No 2.

3.5 Design and construction. The design of type I ovens shall be in accordance with drawing No 10AE1000 as supplemented with figures 1, 2, 3 and 4. Type II ovens shall be the same configuration as type I ovens except that they shall be designed to operate on 28 volt DC, and wired as shown on figure 5. Type I ovens shall be designed to operate on 115/208 volt AC, 400 Hz electrical power and be 3 phase, 4-wire, "Y" connected grounded neutral. Type II ovens shall be designed to operate on 28 volt DC and be a 2-wire, ground power system. Both type I and II ovens shall


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

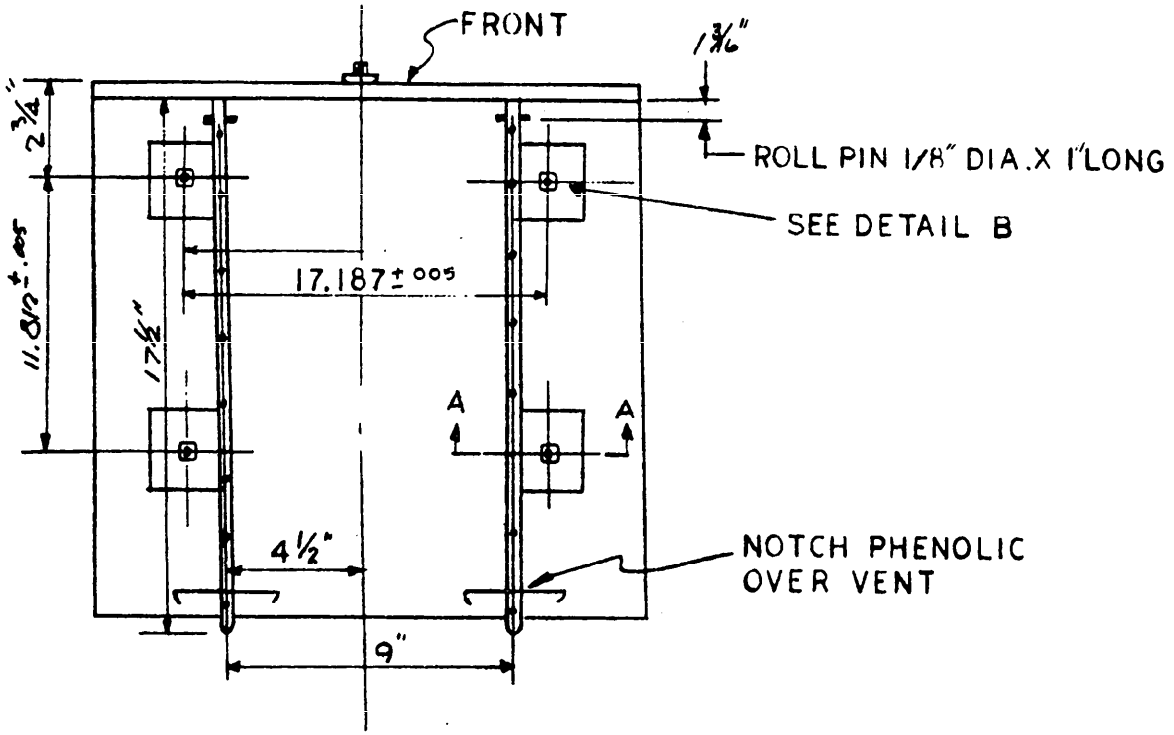

BOTTOM SKIDS
FOR TYPE I STYLE-A

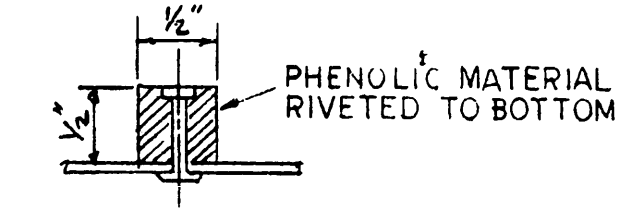


SECTION A-A

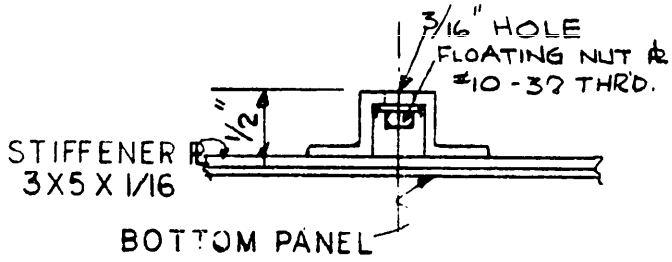

DETAIL B

FIGURE I
TYPE I & II OVEN BOTTOM MOUNT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

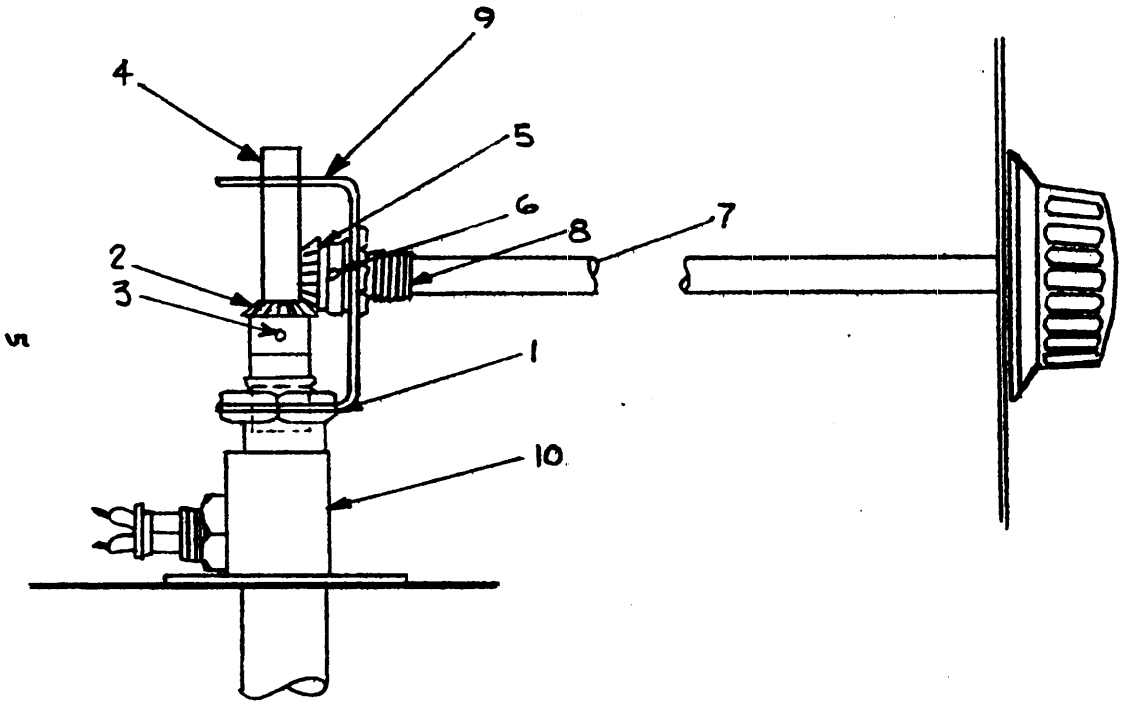


1. NUT, COMMERCIAL, PLAIN HEXAGON
2. BEVEL GEAR
3. PIN, STRAIGHT
4. SHAFT
5. BEVEL GEAR
6. PIN, STRAIGHT
7. SHAFT
8. BUSHING PANEL 1/4" DIA
9. BRACKET
10. THERMOSTAT

ADAPTER ASSEMBLY

TYPE I OVEN ONLY

FIGURE 2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

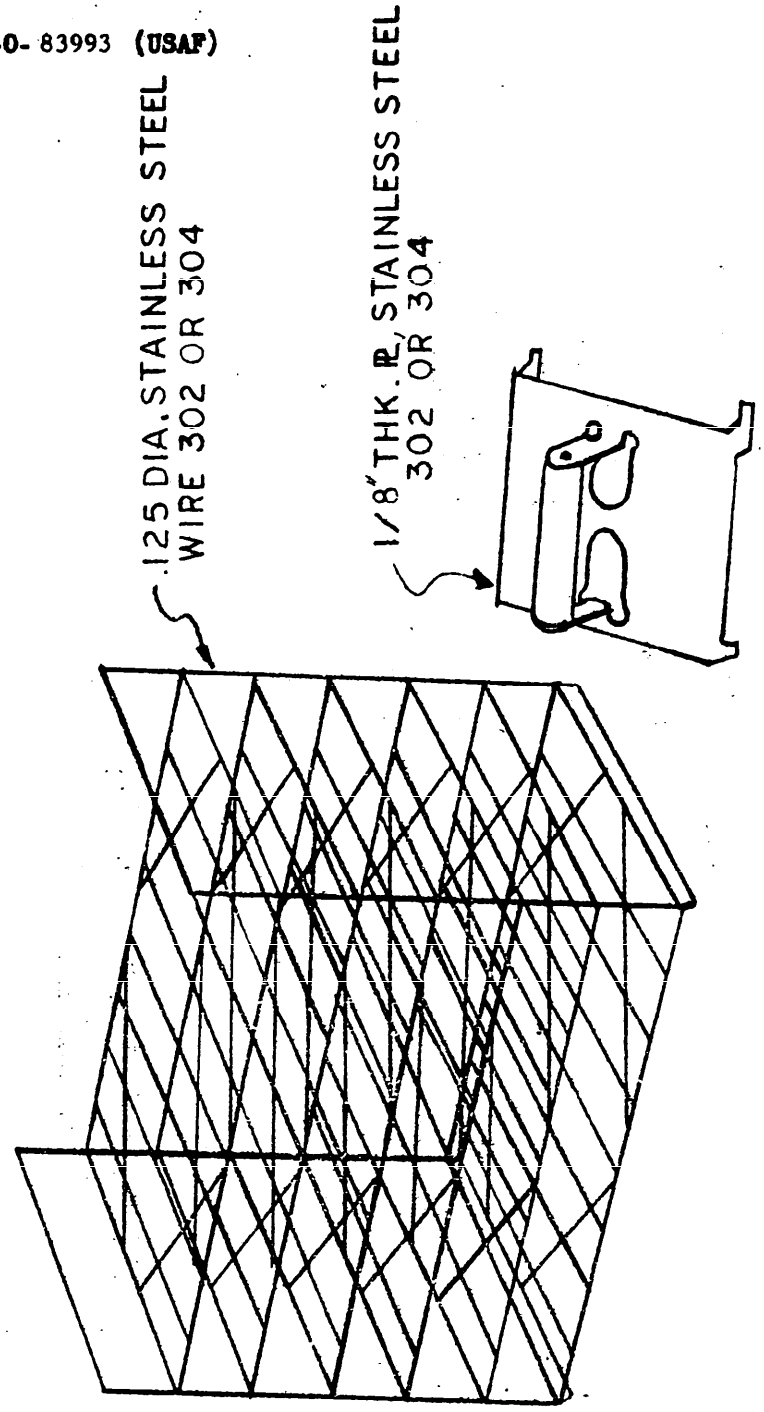

OVEN RACK & HANDLE
TYPE I & II OVENS

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

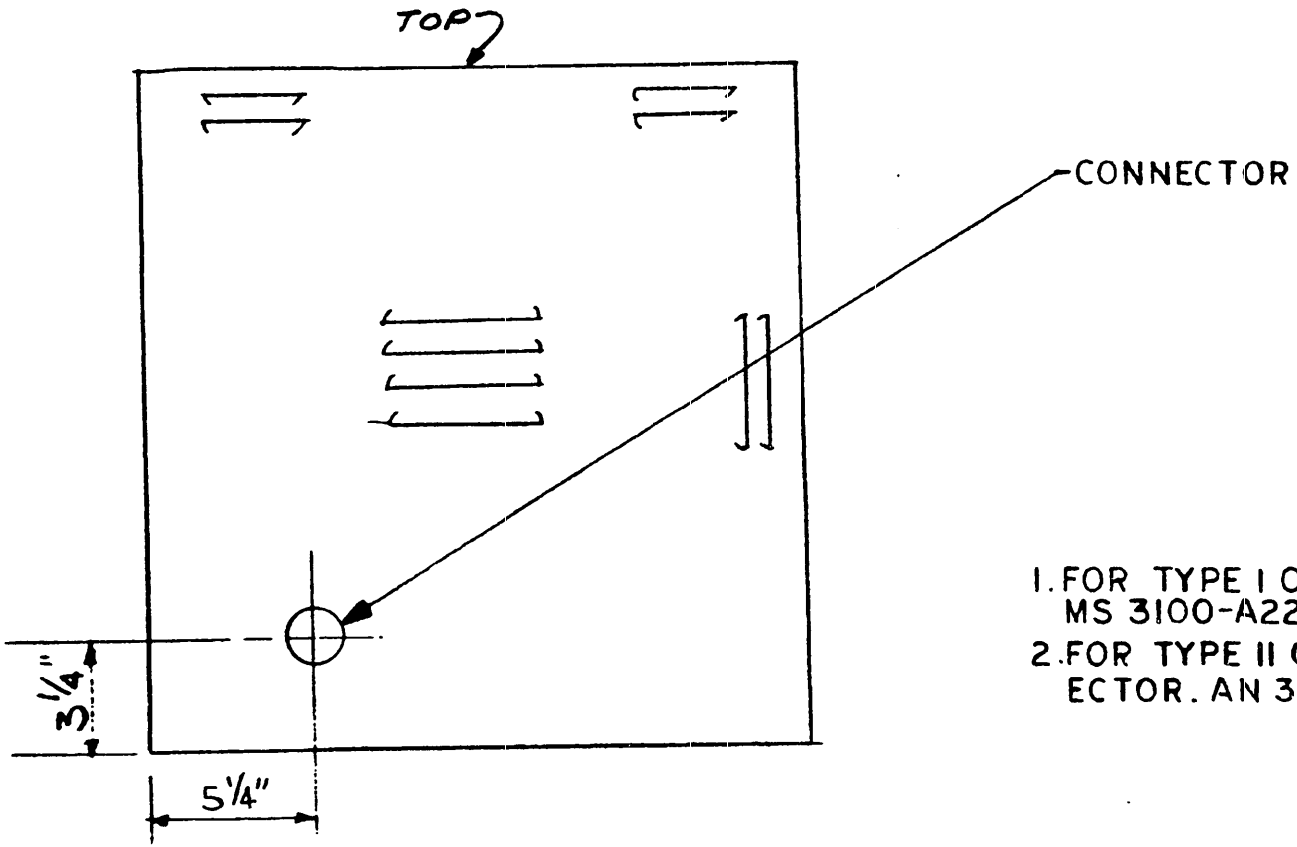

1. FOR TYPE I OVENS USE CONNECTOR MS 3100-A22-22F.
2. FOR TYPE II OVENS USE CONNECTOR. AN 3102A32-5P.


CONNECTOR LOCATION

BACK VIEW

TYPE I & II OVENS

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

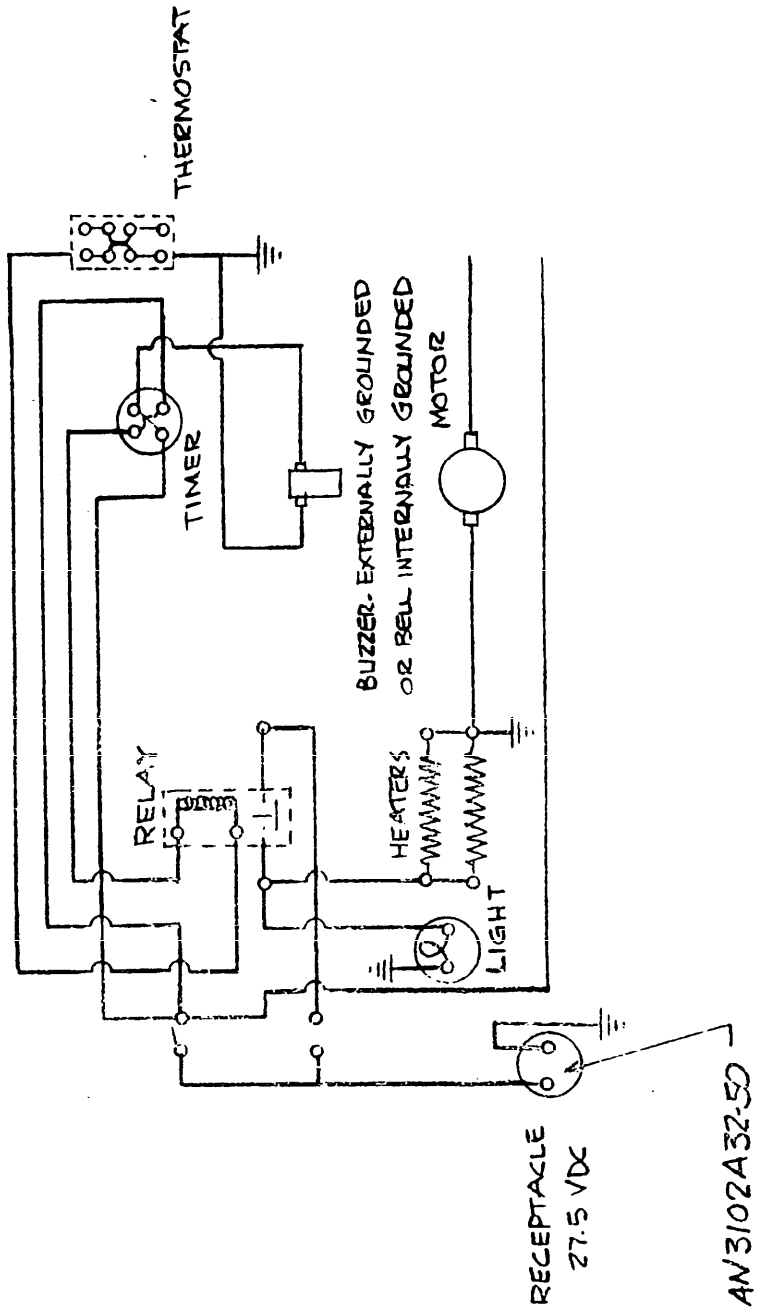

WIRING DIAGRAM

TYPE II OVEN ONLY
(28 VOLT DC)

FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.

have a minimum number of parts consistent with reliability. The designs, where practical, shall permit easy assembly, disassembly, location of trouble sources, and maintenance with tools and equipment normally available commercially. The entire assemblies shall provide maximum sanitation and ease of cleaning.

3.5.1 Outer shell. The outer shell dimensions for both type I and type II ovens shall be 18¾ inches deep by 17 9/16 inches wide by 15 3/4 inches high. The outer shell shall be constructed from aluminum alloy sheet 0.032 gauge conforming to QQ-A-250/2 or QQ-A-250/0, except for the front face of the ovens, which shall be constructed of stainless steel sheet conforming to QQ-S-766 Type 302 or 304 and polished to a No 4 finish.

3.5.2 Heating chamber. The heating chamber for both type I and II ovens shall be constructed of stainless steel sheet conforming to QQ-S-766 Type 302 or 304, condition A.

3.5.3 Insulation. Both type I and II ovens shall consist of a food-warming chamber that is insulated on all six sides (an insulated door forming one side). The insulation on the top and the back of the chamber shall be covered with sheet-metal paneling that will also serve as a base for mounting electrical and other component parts requiring repairing or replacing. Insulation for the food chamber, insulation for the paneling, and the attaching parts shall in turn be mounted within a large outer shell consisting of framework, sheet-metal paneling, an easily removable back panel. The insulating material shall be arranged so that it will remain in place throughout the life of the oven.

3.5.4 Motor, heating baffle, and fan. A motor shall be mounted on the back of the back wall under the removable back panel of both type I and II ovens. The motor shaft shall extend through the back wall of the food warming chamber, and a fan shall be mounted on the inside of the back panel of the food warming chamber. A heating baffle containing electrical resistance heating element shall fit over and around the fan in such a manner that air is drawn through a hole in the center of the baffle and then forced over the heating elements and around the sides of the sheet metal plate holding the elements into the main part of the food warming chamber in which the metal rack is placed to hold meals to be heated. Jack type electrical connectors shall plug the heater baffle in and out of the back panel of the oven.

3.5.5 Front face. The front face of the outer shell shall extend above the floor opening to the food warming chamber and shall serve as a mounting panel for the oven controls.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:48Z
Check the source to verify that this is the current version before use.

3.5.6 Heater baffle. The heater baffle shall be constructed of stainless steel sheet conforming to class 302 or 304, condition A (annealed) of QQ-S-766.

3.5.7 Baffle jacks. The baffle jacks shall be constructed of nickle silver or brass rod in accordance with QQ-B-626 composition 22.

3.5.8 Drop-leaf door. The drop-leaf door shall be constructed of stainless steel conforming to class 302 or 304, condition A (annealed) of QQ-S-766.

3.5.9 Door gasket. The door gasket shall be fabricated from silicone rubber extrusion conforming to ZZ-R-765 and shall be capable of withstanding and remaining functional at a temperature of plus 475° Fahrenheit. The silicone rubber door gasket shall be constructed of four sections to facilitate disassembly and cleaning.

3.5.10 Oven rack and handle. Each type oven shall have a food rack and handle constructed in accordance with figure 3. The rack shall be designed so that 12 Air Force precooked frozen platters can be warmed simultaneously. The Air Force precooked frozen platter measures 8½ inches long, 6½ inches wide and 7/8 inch deep. The rack shall be easily removable from the heating chamber using the handle.

3.5.11 Joints and seams. Joints shall be kept to a minimum and all surfaces shall be smooth and even. All seams shall be filled and smooth. Materials used to close seams shall bond to the metal so that it will not crack or chip off. If joints are welded, the welded areas shall be ground smooth. Seams and joints should be closed to prevent fluids from entering the space between the inner and outer door panels and the space between the heating chamber and the outer shell.

3.5.12 Solder. All solder used in the interior of the heating chamber shall withstand a temperature of 475° F without melting. The solder shall not be toxic and shall conform to type I or II, group A of MIL-S-12204 or QQ-B-654. For surfaces not likely to come into contact with moist food, the use of any of the commercial solders will be satisfactory.

3.5.13 Welding. When welded seams are used, the weld areas and deposited weld material shall be as resistant to corrosion as the parent material and shall conform to MIL-W-8604.

3.5.14 Hardware. All hardware such as door hinges, latches and handles shall be corrosion-resistant, smooth finished, fabricated from solid material with integral or plated finish, designed for ease in cleaning, and secured to the oven in such a way that it can be replaced easily when broken or worn.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.

3.5.15 Electrical receptacle. The electrical receptacle through which power is supplied to each type oven shall conform to that specified on figure 4.

3.5.16 Handling. The ovens shall be designed to withstand strains, jars, vibrations, and any other conditions incidental to shipping, storage, installation, and normal service in the aircraft.

3.5.17 Insulation breakdown and dielectric strength. All wiring and components of the ovens shall withstand repeated insulation breakdown tests without arcing or any other evidence of damage. The test voltage shall be 1500 volts alternating current root mean square (VAC RMS) for 1 minute, or 1800 VAC RMS for 1 second, at commercial frequencies applied between isolated current carrying elements and the case. Test voltage for repeated applications may be reduced 25 percent.

3.5.18 Reliability. The oven shall have the reliability requirements specified below, which shall be demonstrated with a confidence level of 80 percent in accordance with Test Plan IV, Test Level A-1, of MIL-STD-781. Test Level A-1 shall be modified to have equipment on-off cycling as specified in 3.6.5. The oven shall have a minimum acceptable Mean Operating Time Between Failure (MTBF) of 230 hours.

3.5.19 Maintainability. The essential parts of the ovens shall be easily removed for repair or replacement. Adequate access shall be provided where necessary for this purpose. Special tools shall not be required.

3.6 Performance.

3.6.1 Functional requirements. The ovens shall operate satisfactorily as specified herein.

3.6.2 Oven temperature. A fully loaded oven shall operate as specified in 3.6.7 in the temperature range of 150° F to 400° F in continuous time selections from 0 to 60 minutes.

3.6.3 Oven dielectric strength. When an oven is operated, the electrical elements of the oven shall meet the dielectric strength requirements specified in 3.5.17.

3.6.4 Oven door endurance. After each oven door has been opened and slammed hard to close 500 times, there shall not be any evidence of damage to the doors nor deterioration in the performance of the latches.

3.6.5 Oven cycling. The oven shall be designed to meet the reliability requirements specified in 3.5.18 while being alternately heated to control temperature, maintained at this temperature for 20 minutes, and then cooled to within 15° F above ambient temperature with the fan operating. The oven, with the thermostat set at the required value, shall reconstitute 12 precooked frozen meals conforming to MIL-M-13966 in 20 minutes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

3.6.6 Electromagnetic interference. The oven shall conform to the electrical interference requirements of MIL-STD-461 for class II B equipment.

3.6.7 Oven. Each type oven shall be a forced-air type and capable of reconstituting 12 meals conforming to MIL-M-13966 in a maximum time of 20 minutes. The power consumption of each type oven shall not exceed 3250 watts. (3000 watts for heating elements and 250 watts for the fan motor and controls). The current carrying elements of the heaters shall be guarded against direct contact by personnel using the oven. Thermal overload devices shall protect the heater circuits. The oven shall permit continuous selection of temperature over a temperature range of 150° F to 400° F. The selected temperature shall be indicated on the temperature selector. A timer shall permit time selection from 0 to 60 minutes. An amber light which shall be "on" when power is applied to the heating elements shall indicate operation of the oven. The amber light shall be a bayonet type of bulb. The timer shall actuate a buzzer signal to indicate time for removal of meals and concurrently remove electrical power to the heating elements, but the fan shall not be turned off. The buzzer shall be turned off manually.

3.7 Part numbering of interchangeable parts. All parts having the same manufacturer's part numbers shall be functionally and dimensionally interchangeable. The item identification and part number requirements of MIL-D-1000 shall govern the manufacturer's part numbers and changes thereto.

3.8 Identification of product. Each oven shall be marked for identification in accordance with MIL-STD-130.

3.9 Workmanship. The oven shall be neatly finished and all burrs or rough edges shall be removed. Welds shall be sound, smooth and free from pits, fractures and burn through or fissures. Bolt holes shall be accurately punched or drilled and shall have burrs removed. Lockwashers shall be provided in accordance with standard commercial practice. Electrical wiring shall be provided with adequate slack to relieve strain, and the wiring shall not be abraded, poorly joined, or loose at terminals.

3.10 Safety. The oven shall be provided with safety features and devices for the protection of personnel and equipment. Parts which are hazardous to personnel shall be guarded. Equipment and components shall be selected and applied in a manner which is "fail safe" when possible. When not possible, equipment and personnel shall be separately protected against hazardous failures. Equipment shall be analyzed for category III and category IV hazards as defined by MIL-STD-882. Any hazard so identified shall be brought to the attention of the procuring agency with recommended action for satisfying safety requirements. Action order of precedence shall be as specified in MIL-STD-882, para 5.6.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of tests. The inspections and testing of the oven shall be classified as follows:

a. First article tests.
b. Quality conformance tests.

4.3 First article testing.

4.3.1 Test sample. The first article test sample shall consist of five complete ovens.

4.3.2 First article tests. The first article tests shall consist of all of the tests described under 4.6.

4.4 Quality conformance tests. Quality conformance tests shall consist of the individual tests of 4.4.1.

4.4.1 Individual tests. Each oven shall be subjected to the tests described in paragraphs 4.6.1, 4.6.2, 4.6.3.

4.4.1.1 Rejection and retest. When one or more items from a lot fail to meet the specification, acceptance of all items in the lot will be withheld until the extent and cause of failures are determined. The contractor shall explain fully to the Government representative the cause of failure and the action taken to preclude recurrence. After correction, all of the sampling tests shall be repeated.

4.4.1.2 Individual tests may continue. For production reasons, individual tests may be continued pending the investigation of a sampling test failure. But final acceptance of the entire lot shall not be made until it is determined that the lot meets all the requirements of this specification.

4.4.2 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all defects likely to be found and the method of correcting them.

4.5 Test conditions.

4.5.1 Atmospheric conditions. Unless otherwise specified herein all tests shall be made at an atmospheric pressure of 28 to 32 inches of mercury, at a temperature of 25° ±5° C, and at a relative humidity of 80 percent or less. Where tests are made with atmospheric pressure or temperature substantially different from these values, proper allowance shall be made for the change in instrument reading.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4.5.2 Test power. Unless otherwise specified herein, the electrical components shall be tested with 115 volt, 400 cycles per second alternating current, or 28 volt DC whichever is applicable. The tolerance for the voltage and the frequency (if applicable) shall be plus or minus 2 percent.

4.6 Test methods.

4.6.1 Examination of product. Each oven (including all functional components therein) shall be visually examined for compliance with requirements specified herein with respect to sanitation, workmanship, finish, binding of doors, dimensions, markings, and conformance to applicable drawings, and safety.

4.6.2 Oven operation. The temperature selector of the oven shall be positioned at 150° F, 225° F, 300° F, and 400° F. Stabilized oven temperature shall be determined and recorded for each of the four positions. In addition, the following information shall be determined and recorded:

a. Time required for oven to reach stabilized temperature.
b. Extent of temperature stratification with the fan operating and the oven fully loaded.
c. External surface temperatures.
d. Electrical power consumption, transient and steady state.
e. Actuation of warning buzzer and oven temperature during buzzing.
f. Safety inspection and tests to determine compliance with 3.10.

4.6.3 Oven dielectric strength. The electrical elements of the oven shall be tested for compliance with the dielectric strength requirements specified in 3.5.18.

4.6.4 Oven door endurance. One of the sample oven doors shall be opened and slammed shut 500 times. At the completion of the test there shall be no evidence of damage to the doors nor deterioration in the performance of the latch.

4.6.5 Reliability testing. The five sample ovens shall be tested in accordance with Test Plan IV, Test Level A-1, of MIL-STD-781 to demonstrate the reliability requirements of 3.5.18. Test Level A-1 of MIL-STD-781 shall be modified to have equipment on-off cycling as specified in 3.6.5. The ovens shall be alternately heated to control temperature, maintained at this temperature for 20 minutes and then cooled to within 15° F above ambient temperature with the fan operating. The thermostats shall be set at the value required to heat 12 frozen precooked meals conforming to MIL-M-13966 within 20 minutes. The actual temperature control point shall be recorded before and after each test cycle. In the event of failure to pass the reliability test, the procuring activity shall be notified of the circumstances surrounding the failure. A relevant failure shall be defined as any malfunction which prevents the oven from performing its required operation and which requires the replacement of an oven component.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4.6.6 Electromagnetic interference tests. The oven shall be tested for compliance with 3.6.6 in accordance with table II of MIL-STD-461.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each oven shall be preserved in accordance with method III of MIL-P-116 and shall be packaged in a box conforming to type CF, class weather-resistant, variety DW of PPP-B-636. Utilize PPP-F-320 die-cut fiberboard pads to block ovens within container. Laminate pads to required thickness to ensure that hardware such as handles and knobs are clear of container walls.

5.1.2 Level C. Level C packaging shall be in accordance with manufacturer's standard commercial practice.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Ovens preserved and packaged as specified in 5.1.1 shall be packed within exterior shipping containers conforming to type CF, class weather-resistant, variety DW of PPP-B-636.

5.2.2 Level B. Ovens preserved and packaged as specified in 5.1.1 shall be packed within exterior shipping containers conforming to type CF, class domestic, variety DW of PPP-B-636.

5.2.3 Level C. Ovens shall be packed in a manner that will afford adequate protection against corrosion, deterioration and physical damage and shall conform to applicable carrier rules and regulations.

5.3 Palletization. When specified, ovens preserved and packaged as specified in 5.1.1 shall be palletized in accordance with MIL-STD-147 in lieu of shipping containers of 5.2.1 and 5.2.2.

6. NOTES

6.1 Intended use. The oven covered by this specification is intended for use in the air transportable buffet-lavatory used on C-141 transport aircraft to fulfill the food, drink, lavatory and sanitation requirements of 132 passengers during an 18 hour period.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. If first article is required.
c. Level of packaging and packing.
d. Type oven required.
e. When palletizing is required (see 5.3).

Custodian:
Air Force - 84

Preparing Activity:
Air Force - 84

Project Number:
7310-F482

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1426 REPLACES NAVSHIPS FORM 4863 WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

Warner Robins ALC (MMSS)
Robins AFB GA 31098

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.