MIL-T-83965A(USAF)
22 Sep 82
SUPERSEDING
MIL-T-83965(USAF)
11 January 1972

MILITARY SPECIFICATION

TRUCK, FIRE-FIGHTING, A/S32P-10, FORCIBLE ENTRY

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a gasoline-engine-driven, four-wheel drive, forcible entry fire truck designated A/S32P-10, which has a minimum gross vehicle weight (GVW) of 10,000 pounds. Vehicle described in this specification is assembled from standard commercial components and is supplied complete with standard commercial tools and equipment.

2. APPLICABLE DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications and Standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, for a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

GGG-H-86	Hammers, Hand, and Maul
GGG-S-121	Screwdrivers and Screw Holders (Starters)
W-B-131	Battery, Storage, Vehicular, Ignition, Lighting and Starting
GGG-S-291	Shears, Metal Cutting, Bench and Hand
GGG-C-313	Chisels, Hand; Cape, Diamond Point, Fuller, Cold, Rivet Buster, Round Nose, Side Cutting, Splitting and Butt
GGG-S-326	Shovels, Scoops, Spades, Snow Pushers, and Telegraph Spoons
F-F-351	Filter and Filter Elements, Fluid, Pressure: Lubricating Oil, Bypass and Full Flow
GGG-P-471	Pliers, Nipers, and Tweezers
GG-G-951	Goggles and Spectacles, All Plastic, Industrial
T-R-605	Rope; Manila and Sisal

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: HQ AFLC CASO/LODSAC, Federal Center, Battle Creek, MI 49016 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 4210

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:48Z
Check the source to verify that this is the currentversion before use.

GGG-W-651	Wrenches, Pipe Wrench and Basin Wrench
GG-B-675	Breathing Apparatus, Self-Contrained
GGG-A-926	Ax, Single Bit, Double Bit, Pick Head, and Mattock Head

MILITARY

MIL-G-613	Grapnels, Marine, Trip Wire and Crash Truck
MIL-B-12841	Basic Issue Items for Military Vehicles, Carriages and Equipment; Preparation for Shipment and Storage of
MIL-W-83420	Wire Rope, Flexible, For Aircraft Control

STANDARDS

FEDERAL

FED-STD-595	Colors

MILITARY

MIL-STD-1178	Standard Safety Devices for Administrative Automotive Vehicles
MIL-STD-1223	Administrative Wheeled Vehicles Treatment, Painting, Undercoating, Identification Marking, Data Plates and Warranty Notice Standards

DRAWINGS

Ordnance Corps

A7142038	Pin, Safety

Army

7722352	Radio Receptacle Assembly

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents form a part of this specification to the extent specified herein.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Environmental Protection Agency

Control of Air Pollution from New Motor Vehicles and New Motor Vehicle Engines

(Application for copies should reference "Code of Federal Regulations 40 CFR and the Federal Register" and should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

Department of Transportation

Federal Motor Vehicle Safety Standards
Motor Carrier Safety Regulation

(Application for copies should be addressed to the Department of Transportation, Federal Highway Administration, Washington, D. C. 20591.)

SOCIETY OF AUTOMOTIVE ENGINEERS, INC. (SAE)
SAE Standards and Recommended Practices.

J245	- Engine Rating Code-Spark Ignition.
J537	- Storage Batteries.
J551	- Measurement of Electromagnetic Radiation From a Motor Vehicle or Other Internal-Combustion Powered Device (Excluding Aircraft) (20-1000 MHz).
J552	- External Electromagnetic Radiation Suppressors.
J560	- Seven Conductor Electrical Connector for Truck Trailer Jumper Cable.

(Application for copies should be addressed to the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA. 15096.)

STATE OF CALIFORNIA
California Vehicle Code, Section 27160.

(Application for copies should be addressed to the Department of Motor Vehicles, 2570 24th Street, Sacramento, California 95809.)

The Tire and Rim Association, Inc.

Yearbook

(Application for copies should be addressed to the Tire and Rim Association, Inc., 3200 W. Market Street, Akron, Ohio 44313.)

Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the reference cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Preproduction. This specification makes provisions for preproduction testing.

3.2 Standard vehicle and accessories. Except as specified in 3.2.1 through 3.2.1.9, vehicle, components, assemblies, and accessories to be delivered under the contract shall be standard or optional items, which meet or exceed the requirements of this specification. All chassis items shall be as represented in the chassis manufacturer's technical data, and special bodies or mounted equipment shall be as represented in the body and equipment manufacturer's technical data. Technical data shall be limited to specifications and technical material, identical to that furnished to the authorized company representatives for selection of vehicle models and components, and shall be on file in the engineering offices

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

of the procuring activity, prior to delivery of the items. As the automotive vehicle, components, assemblies, and accessories to be procured hereunder are standard or optional commercial products; for the purpose of this procurement they shall be construed as "commercial automotive products," and they shall comply with all Federal Motor Vehicle Safety Standards applicable on the date of manufacture to non-military, non-export motor vehicle products.

3.2.1 Additional requirements. In addition to standard vehicle and components specified in 3.2, vehicle shall be furnished with the other equipment as specified herein.

3.2.1.1 Painting and marking. Treatment, painting, identification marking, data plates and warranty notice shall be in accordance with MIL-STD-1223 as specified by the procuring activity for the appropriate service (see 6.2)

3.2.1.2 Undercoating. Unless otherwise specified, vehicle shall be undercoated in accordance with MIL-STD-1223.

3.2.1.3 Heavy-duty cooling system. A heavy-duty cooling system shall be furnished that shall maintain coolant at a temperature below the boiling point, with vehicle loaded to rated GVW and operated continuously for one hour with air conditioner operating in an ambient air temperature of not less than 125` F.

3.2.1.4 Oil filter. Oil filter shall be manufacturer's standard full-flow type, or by-pass type with filter element conforming to F-F-351.

3.2.1.5 Rearview mirrors. The reflecting surface of each outside rearview mirror specified in 3.5.22(b) shall be not less than 50 square inches in area. Western type truck mirrors or equal shall be furnished.

3.2.1.6 Towing devices. Unless otherwise specified (see 6.2), towing devices (see 3.2.1.6.1) shall be furnished on vehicle.

3.2.1.6.1 Location of towing devices. Not less than two hooks, loops or pins and properly installed for towing the vehicle shall be furnished. Also a one frame and rear step bumper mounted, 2-inch by 2-inch, socket type receiver trailer hitch capable of supporting a tongue weight of 1,000 pounds and of pulling a 10,000 pound vehicle shall be furnished.

3.2.1.7 Drive hubs. Unless interaxle compensating devices between front and rear axles are furnished, (See 3.5.5), the vehicle shall be equipped with drive hubs manual or automatic for disengaging the front wheels from the power train.

3.2.1.8 Federal Motor Vehicle Standards. Vehicle and furnished accessories shall comply with all Federal Motor Vehicle Safety Standards in effect on the date of manufacture.

3.2.1.9 Safety devices. Vehicle shall be equipped with safety devices conforming to MIL-STD-1178, 1178/3 and 1178/4. When identical of like safety features are instituted by Federal Motor Vehicle Safety Standards, they shall take precedence over the safety standard(s) in MIL-STD-1178.

3.2.1.10 Sound level. The exterior sound level produced by the vehicle shall not exceed the noise limits established by the California Vehicle Code,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

Section 27160. The interior sound level shall conform to Federal Motor Carrier Safety Regulation 393.94.

3.3 Vehicle weight, rating and dimensions.

3.3.1 Curb weight. Curb weight shall include weight of chassis and cab, with all attachments, accessories, and equipment; body; and full complement of fuel, lubricants and coolant.

3.3.2 Gross vehicle weight. Gross vehicle weight (GVW) shall consist of curb weight, operator (weight computed at 175 pounds), 175 pounds of payload in rear seat, and a payload, distributed evenly over the vehicle load area, to provide not less than the specified GVW. The difference in tire loading shall not exceed 150 pounds between any two tires under above conditions of loading on ground level. The tire ground pressure shall not exceed 35 pounds per square inch (psi) based upon the gross contact area of the tire at zero penetration, with not more than 26 psi as a design objective.

3.3.3 Rating. Component and vehicular rating shall not be raised to meet the requirements of this specification.

3.3.4 Cab to axle dimensions. Minimum cab to axle dimensions shall be 56 inches.

3.4 Performance. Truck fully loaded to required GVW shall be able to:

3.4.1 Maintain speed of not less than 70 miles per hour (MPH) on dry, level concrete, for a distance of one mile.

3.4.2 Ascend an 8 percent dry concrete grade at a speed of 60 MPH.

3.4.3 Accelerate from 0 to a speed of 65 MPH, in a maximum of 30 seconds on level, concrete road.

3.4.4 Operate on side slopes, right and left, up to 20 percent and longitudinal slopes, up and down, to 30 percent.

3.4.5 Service brake shall control and hold vehicle on a 35 percent grade. Under all conditions of loading, service brakes shall stop vehicle, from a speed of 20 mph, in not more than 30 feet from the point at which movement of the brake pedal begins. Deceleration and stopping distance shall be demonstrated on dry, hard, approximately level road surface that is free from loose material.

3.5 Vehicle and chassis components.

3.5.1 Engine. The engine shall be a liquid cooled, internal combustion, four-stroke cycle gasoline type with not less than eight cylinders and shall have not less than 400 cubic inches displacement. The engine when operating at manufacturer's recommended governed speed with regular grade fuel shall produce a minimum net horsepower of 185 HP and a minimum net torque of 305 lb-ft.

3.5.1.1 Air pollution control. Unless otherwise specified (see 6.2), vehicles destined for the 50 states, the District of Columbia, Puerto Rico and all US Territories except the Canal Zone shall comply with the Federal Government

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the currentversion before use.

Environmental Protection Agency Regulations governing Control of Air Pollution from New Motor Vehicles and New Motor Vehicle Engines in effect on the date of manufacture. Vehicles shall also comply with all the 50 state regulations governing air pollution control in effect on the date of manufacture.

3.5.1.2 Winterization. When specified (see 6.2), coolant, engine, oil, and battery heaters shall be provided. Heaters shall operate on 110-volt ac,and shall be wired through a junction block to a single, three pronged (male), weatherproof, slave receptacle for receiving external power and grounding vehicle. A three-wire connecting cable, 25 feet long and of adequate line capacity to supply power for all heater units simultaneously, shall be furnished. Connecting cable shall include matching, female connector at the vehicle end and a standard, weatherproof, three pringed (two power plus one ground) male connector at the other end. Electrical apparatus shall conform to Federal Motor Carrier Safety Regulation 393.77(c)(7). Electrical insulation, of connecting cable, shall withstand normal operating stresses in low ambient air temperatures (down to minus 40° F) without cracking or loss of dielectric capacity. All heater lead wires shall be installed without interfering with vehicle component operation, and without loose, excess wire. A carrier for the connecting cable shall be mounted within the cab or engine compartment and shall provide positive cable retention during vehicle operation. Heaters shall be furnished as follows:

a. Coolant heater, 1500-watt minimum rating, shall be installed in the engine block or lower, coolant, inlet hose. A coolant-circulating pump, driven by a 110-volt ac motor, shall be provided. Engine thermostat with an operating range of 170° to 180° F shall be installed.

b. Immersion type engine-oil heater 300-watt minimum rating with 170° to 180° thermostat, shall be installed in oil pan through any convenient opening.

c. Battery heater shall have a capacity adequate to maintain the battery electrolyte at a temperature of not less than 10° F during vehicle exposure in ambient air temperatures as low as minus 40° F and shall embody a thermostat to limit the temperature of the electrolyte to not more than 80° F.

3.5.2 Electrical system. Electrical systems shall be in accordance with Federal Motor Carrier Safety Regulations 393.27 through 393.31 and 393.33.

3.5.2.1 Ignition switch. Unless otherwise specified (see 6.2), ignition switch key shall be permanently installed so it cannot be removed or a keyless switch shall be installed.

3.5.2.2 Ignition system. Ignition system of 12-volt dc potential shall be furnished. Unless otherwise specified (see 6.2), alternator of not less than 105 ampere rated capacity and which provides not less than 30-ampere dc output at normal engine idle speed shall be furnished. When an inverter type 24 volt system is furnished (see 3.5.2.5.1), alternator of not less than 105 ampere rated capacity shall be furnished. Distributor shall be dust and moisture proof.

3.5.2.3 Standard Battery. Unless otherwise specified (see 6.2), battery furnished shall be 12-volt potential with capacity of not less than 50 ampere hours at a 20-hour rate. When an inverter type 24 volt system is furnished (see 3.5.2.5.1), battery furnished shall be 12-volt potential with capacity

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

of not less than 70 ampere hours at a 20-hour rate.

3.5.2.3.1 Special battery, associated components. The following battery and components described shall be furnished when specified (see 6.2). A 12-volt dc type with a capacity of not less than 70 ampere hours at a 20-hour rate. A cab dash-mounted battery on-off disconnect switch with an auxiliary circuit to disconnect the field circuit of the alternator shall be furnished and installed at a convenient location. A battery charging, two wire receptacle shall be furnished and connected to the battery for use with an external 12-volt dc 20 ampere output battery charger. Receptacle wiring to the battery shall be designed to prevent power from being drawn from the battery at the receptacle. A matching two-wire plug for the two wire receptacle shall also be furnished.

3.5.2.4 Lighting. All vehicle lights, reflectors, and wiring shall be as specified herein and shall conform to Motor Carrier Safety Regulation 393.11 (when basic vehicle width exclusive of accessories does not exceed 80 inches), 393.12 (when vehicle exceeds 80 inches in width), 393.19, 393.20, 393.22 through 393.26(d), 393.27 through 393.31, and 393.33. Lights and reflectors shall not be mounted on vertical surfaces of rub rails or mounted on vehicle bumpers or in any manner to increase vehicle width. Backup lights shall be furnished. A special adjustable aircraft type light for reading maps, instructions, etc. shall be furnished and located near the dome light so it can be used by either the front or rear passenger. The light shall not impair the driver's vision.

3.5.2.4.1 Turn signals. Turn signal operating unit shall be self-cancelling type with visible and audible flash indicator.

3.5.2.5 Auxiliary 24 volt system with radio outlet. When specified (see 6.2), an auxiliary 24 volt system with a shielded wiring harness and radio outlet shall be furnished. The receptacle shall conform to Drawing 7722352, and shall be marked with pressure sensitive tape "24 VOLT RADIO OUTLET". The receptacle shall be located on the side opposite the driver on the instrument panel in the cab. The shielded wiring harness shall be connected to the receptacle and the 24 volt system. The system output capacity shall be not less than 25 amperes. Either an inverter type (see 3.5.2.5.1) or an alternator type system (see 3.5.2.5.2) shall be furnished.

3.5.2.5.1 Inverter type 24 volt system. The 12 to 24 volt inverter(s) shall operate from 12 volt battery (see 3.5.2.3).

3.5.2.5.2 Alternator type 24 volt system. The system shall be separate from the 12 volt vehicle lighting and ignition system and shall include:

a. Nominal 24 volt alternator with not less than 25 ampere rated capacity and capable of providing not less than 7 ampere dc output at normal engine idle speed.

b. Two 12 volt batteries with a combined capacity of at least 40 ampere hours at a 20-hour rate or one 24 volt battery with at least 20 ampere hours capacity at a 20-hour rate.

c. Voltage regulating device.

d. An ammeter, mounted on the instrument panel.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the currentversion before use.

3.5.2.6 Horn. Manufacturer's standard electric horn shall be furnished.

3.5.2.7 Radio interference suppression. Vehicle shall be suppressed to limit electromagnetic radiation in accordance with SAE J551. Suppressors used shall confirm to SAE J552.

3.5.3 Air cleaner. An air cleaner shall be furnished. When equipped with an oil-bath type, oil capacity shall be not less than 1 pint.

3.5.4 Exhaust system. Exhaust system shall conform to Motor Carrier Safety Regulation 393.83.

3.5.5 Transmission and transfer case. An automatic two and four wheel drive transmission shall be furnished. Input torque capacity of transmission shall be at least equal to the maximum torque delivered by the engine. The transmission shall have not less than three forward speeds and one reverse speed. Transmission shall provide for the maximum ease of shifting. The transfer case shall be of the two-speed type. Controls shall be provided for both two and four-wheel drive. A no spin rear axel shall be furnished.

3.5.6 Drive line components. Drive line components shall be adequate to transmit the maximum delivered torque of the engine, as developed through the maximum gear train reduction.

3.5.7 Steering. Power steering shall be furnished.

3.5.8 Frame. Chassis frame shall be manufacturer's standard for the type vehicle covered by this specification.

3.5.9 Suspensions. Vehicle shall be equipped with suspension system, with component having a rated capacity at least equal to the load imposed on each member, measured at the ground, with vehicle loaded to specified GVW. When suspension is rated at the spring pads, unsprung weight shall be deducted. Vehicle shall be equipped with hydraulic, double-acting shock absorbers on the front and rear wheels. When specified (see 6.2) heavy-duty springs, front and rear, shall be furnished. Heavy-duty is defined as having a rated capacity equal to the load imposed, plus at least 10 percent, with vehicle loaded to specified GVW.

3.5.10 Axles. Axle ratings shall be at least equal to the load imposed on each axle, measured at the ground, with vehicle loaded to specified GVW.

3.5.11 Wheels, rims, tires, and tubes. Unless otherwise specified (see 6.2), vehicle shall be equipped with single front and rear wheels. Rim size shall be the same for all tires on the vehicle. Rim and tire ratings shall conform to Tire and Rim Association recommendations, for the type and size of tires furnished.

3.5.11.1 Tires. Tires shall be tube or tubeless type with non-directional mud and snow tread. Manufacturer's current size of tires conforming to specified requirements may be furnished. Tires shall be of a domestic make. Tires shall have a rated capacity at least equal to the load imposed on each tire, measured at each wheel, at the ground, with the vehicle loaded to specified GVW.

3.5.11.2 Inner tubes. When tube-type tires are furnished, inner tubes shall be of proper size for tires furnished. When mounted on other than drop

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

center rims, tire flaps shall be installed.

3.5.11.3 Spare wheel assembly. Unless otherwise specified (see 6.2), a spare wheel or rim mounted on a carrier shall be furnished and installed in a readily accessible location. Carrier design shall enable removal and installation of spare wheel assembly using only the tools specifiedc in 3.5.17.

3.5.11.3.1 Spare tire. Unless otherwise specified (see 6.2), an inflated spare tire mounted on spare wheel or rim shall be furnished. The tire shall be the same size, tread design, and ply rating as tires on vehicle.

3.5.12 Brakes Brakes shall conform to Motor Carrier Safety Regulations 393.40 through 393.42, and 393.45 through 393.48 and as specified herein. Vehicles shall be equipped with vacuum-assisted hydraulic brakes.

3.5.13 Cab. A four door cab of all metal construction shall be furnished. Cab doors shall be equipped with locks, operable from inside the cab through mechanical linkage, and with at least the curbside door equipped with external, key-operated lock. Windows shall be of safety glass. Cab shall be furnished with a full width upholstered front seat with a back and one jump-seat in the rear behind the front passenger seat (see Fig 1.). A minimum of 30 inches, measured horizontally, shall exist between the front of the back of the rear seat and the back of the front seat with the front seat adjusted to the extreme forward position. Three pairs of lap type seat belts shall be furnished and installed for use in the front seat and one lap type seat belt for use in the rear seat. A cabinet shall be provided behind the front seat for storing a minimum of 10 books which are 14 inches high, 12 inches deep and three inches thick. Steps shall be coated with anti-slip material or be anti-slip treat plate. Gas and brake pedals shall be designed for operation by a person wearing large boots normally worn by fire fighters.

3.5.14 Body. The body shall be a utility body mounted on the chassis and shall have weathertight compartments with bottoms flush and level with or slightly above the bottom of the doors and doors shall be double paneled, located and sized for easy storage and removal of stowed equipment (See Fig. 1). A half tray shall be installed in the rear compartment. A full width tray shall be installed at the top of the front compartment of the mounted body and a bottle rack for three (3) each MSA air bottles shall be installed behind the bookcase in the cab rear seat area (See Fig. 1). Compartments shall not be equipped with key locks; however, lever or button type latches shall be furnished. Either type shall be operable with a heavy gloved hand. All compartments shall be marked or labeled to show stored items. Rear doors of the mounted body shall have automatic door holders to hold doors in the open position. Each compartment shall contain a light which is turned on when the door is opened. A master on-off power switch for energizing these lights shall be located on the cab dashboard. Each compartment shall be as shown in Fig. 1., and shall have louvers for ventilation of the cabinet space. The front cabinet shall have a reinforced sliding type shelf which shall be as close to ground level as possible and can slide out to either side for storage of heavy portable equipment. Construction of the body shall be high strength aluminum and shall, at minimum, be as follows: Frame members, supports, doors, tops, bottoms and sides shall be 0.125 inches thick; backs and shelves shall be 0.125 inches thick; formed channels shall be 0.250 inches thick or extrusions of equal strength; tread plate where used as a walking plate shall be 3003 type aluminum or equal, 0.250 inches thick. The upper work platform shall be aluminum plate open expanded type stair tread for sure-footing heavy boots

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

and shall be designed to support the weight of five persons weighing 175 pounds each. It shall be flush with the sides of the cabinets and sides of the cab. The space beneath the upper work platform shall allow storage of three of the type ladders described in para 3.5.33p, one pike pole described in para 3.5.33e and three full length folding litters described in para 3.5.33g in a weather tight enclosure. The ladders, pike pole and litters shall be firmly secured in place to prevent them from coming loose and/or creating undesirable noise and they shall be capable of being easily and quickly stored and/or removed. A safe means shall be furnished for ascending to and descending from the upper work platform.

3.5.15 Windshield wipers and washers. Vehicle shall be equipped with multispeed electrically operated windshield wipers with windshield washers.

3.5.16 Bumpers. Front bumper and rear bumper shall be provided on the truck.

3.5.17 Tools. Unless otherwise specified (see 6.2), each vehicle shall be furnished with at least a jack, jack handle and wheel-nut wrench to replace mounted tire assembly with spare assembly. The jack at its closed height shall fit under axle, or other satisfactory lift point, near any wheel with the tire flat. The jack, without blocking, shall be capable of raising any wheel of loaded vehicle to a height adequate to allow removal and replacement of wheel and tire assembly.

3.5.18 Heater and defroster. A heavy duty hot water heater shall be provided. Heater shall have fresh air intakes. Discharge outlets shall be provided to direct heated air to floor and to defroster system. Heater shall be complete with blower and with mounted controls. Heater shall be capable of maintaining cab temperature of 40° F at floor level and defrosting system shall be capable of preventing frost or fog on at least 80% of all transparent areas (with three occupants in cab) with outside ambient temperature of -40° F.

3.5.19 Cab air conditioner. The cab air conditioner, when specified (see 6.2), shall be a heavy duty type and shall have sufficient capacity to maintain the car interior temperature at 90° F or lower when the outside ambient temperature is 125° F. The air conditioning installation shall have sufficient capacity to perform the specified cooling in less than 15 minutes of operation.

3.5.20 Controls and operating mechanism. All controls and operating mechanisms shall be located for left-hand drive. Controls shall be complete and conveniently operable by the driver. Lever controls shall be designed and located to permit easy entrance and exit of operator to and from driver's compartment. Instruments and controls shall be identified as to their function and installed in a manner to facilitate removal and servicing. Instruments shall be panel mounted.

3.5.21 Identification of fill openings. All fill openings shall be labeled, i.e. oil, water, fuel, hydraulic reservoir.

3.5.22 Accessories and equipment. Chassis equipment shall be complete with all accessories furnished as standard equipment by the manufacturer. The following minimum equipment shall be furnished:

a. All the items described in paragraphs 3.5.23 through 3.5.27, 3.5.30 through 3.5.32c and 3.5.33a through w, unless otherwise indicated

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.

(see 6.2)
b. Outside rearview mirror on both sides
c. Ammeter or charging indicator
d. Fuel gage
e. Oil pressure gage or indicator
f. Engine temperature gage or indicator
g. Speedometer with recording odometer
h. Ash receptacle
i. Cigar lighter
j. Dual sunvisors
k. Front door mounted armrest on driver's side
l. Driver's compartment ventilator other than window

3.5.23 Winch. A 12 volt Ramsey Winch Co., 8,000 pound model No. DCB-200 winch assembly or equal shall be provided on the front of vehicle. Winch shall be furnished with one hundred and fifty feet of 5/16 inch diameter, 7X19 aircraft cable, preformed steel core, galvanized, in accordance with MIL-W-83420, and an extra heavy duty clevis hook shall be installed at the end of the cable for quickly attaching or removing the grapnel assembly specified in paragraph 3.5.31. Winch line pull rating on the bare drum, and the nominal breaking strength of the wire rope, chain and hook, shall be not less than 8000 lbs. Winch shall also be furnished with a grapnel hook in accordance with MIL-G-613, Type IV, Size 2; except that chain and ring do not apply. Winch shall be suitable for hoisting as well as for assisting truck to negotiate difficult terrain. Winch shall have forward and reverse drum-drive and a drum clutch to permit free spooling of the cable. Winch shall be equipped with a four-way roller guide.

3.5.24 Spotlights. Install two spotlights, Unity Mfg Co., 225 (200,000 cp) or equal on front of vehicle, two lights, one Unity Mfg Co., No. AG12v (75,000 cp) or equal and one Unity Mfg Co., No AG12V (1,100 cp) or equal on rear of vehicle, and two 500 watt telescopic quartz lights. Light towers to be mounted as shown in Fig. 1. The two rear lights shall be corner mounted. Spotlights shall be mounted so that they are not a safety hazard or do not interfere with the operation of the vehicle or vehicle components. Two warning beaken lights shall be mounted on the top and on rear of upper platform (See Fig. 1). Two clearance lights shall be installed on sides near top of upper platform (See Fig. 1). All of the above lights shall operate off the vehicle electrical system and shall have circuit breakers.

3.5.25 Light bar. A Federal Model 11 Twin Beacon Ray Visibar or equal shall be mounted on the vehicle as shown on Figure 1.

3.5.26 Electronic siren. A Federal Model PA-20 and Speaker Model CP-25 or equal shall be mounted on the visibar as shown on Figure 1. A matching microphone shall be furnished for use with the mounted unit.

3.5.27 Instruction plate. An instruction plate or plates giving instructions on shifting pattern, winch operation, and transfer case operation shall be mounted on the dash panel.

3.5.28 Center of gravity. The center of gravity shall be determined and marked on the vehicle in the proper location. It shall not be more than 40 inches above ground level.

3.5.29 Vehicle color. Unless otherwise specified (See para 6.2), the exter-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

ior of the vehicle shall be painted with DuPont Imron Polyurethane paint color no. 7744UR (lime yellow) or with another equal type paint. All chromium plated and aluminum tread plates shall not be painted except for the front bumper and wheels which shall be painted black. Painting to be done as specified by the paint manufacturer. The interior shall be chassis manufacturer's standard color black or brown.

3.5.30 Axes. One Fireman Axe, with pick point, steel head, GGG-A-926, Type II, not less than 6 pounds, shall be stored and securely mounted in the left storage compartment above left rear wheel (see Figure 1). Chrome plated blade cover and brackets shall be provided. Rubberized pick point cover to be provided and be permanently attached in storage area.

3.5.31 Grapnel assembly. A grapnel assembly in accordance with MIL-G-613, Type IV, Size 2 (except chain and ring are not required) shall be furnished for use with the winch described in 3.5.23. It shall be stored in the front right compartment.

3.5.32 Stored equipment. The following equipment shall be stored and mounted as shown on Figure 1. The equipment shall be securable to the vehicle with quick release type clamps or straps. The release mechanisms shall be capable of being operated by a heavy gloved hand.

a. Two each Mine Safety Appliance Co. Model Number 401 or equal pressure Demand Type Self-Contained Compressed Air Breathing Apparatus.

b. Two each portable, automatic charging type battery powered electric lanterns complete with the automatic charging unit and mounting brackets. The lights shall be stored and located behind the front seat.

c. Power saw. One each, Paratech, Inc No 800288 K1200 14 inch or equal Rescue Saw and Kit. Saw and accessory items shall be mounted in the truck compartment, kit container box is required.

d. Compartment. The equipment in the rear cab compartment shall be fastened to prevent equipment from sliding forward or to the left (endangering personnel) and from sliding to the rear or to the right (damaging vehicle glass windows, etc.).

3.5.33 Body mounted equipment. The following equipment shall be capable of being mounted in the appropriate compartments of the body as shown on Figure 1, except for the portable electric generator (see 3.5.33d) shall be stored on the left side of rollout tray (see 3.5.14). The equipment shall be securable to the vehicle with quick release type clamps or straps. The release mechanism shall be capable of being operated by a heavy gloved hand.

a. Two each outdoor iodine quartz flood lights, with lens protectors, Stonco Mfg. Co. or equal, 500 watt, lumens capacity, using General Electric quartz bulb Nr. Q-500T3/CL/6 or equal. Connections shall be as specified in (b) below.

b. Two each, 50 foot lengths of heavy duty oil-resistant, waterproof 3-wire conductor, size Nr. 12, 600 volt rated, having twist-lock connectors with rubber boots for water tight connections. Twist locks shall be in accordance with NEMA configuration LG-15, 15 Amp 3 wire type.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.

c. One "Y" connector of sufficient capacity to connect 50 foot conductors to the portable generator. Connections shall be as specified in (b) above.

d. One gasoline engine driven 4000 watt, 115 volt, 60 cycle, portable alternating current generator, Homelite Model No. E4000 or equal.

e. One pike pole, 6 foot long, with fiberglass handle.

f. One short handle shovel per Fed Spec GGG-S-326, Type IV, Class A.

g. One full length folding litter.

h. Two each 75 foot length, 3/4 inch diameter, manila rope, per Fed Spec T-R-605, Type M, Class 1.

i. Cutter tube and hose, one each, Aircraft Tools Inc. part number AT501C or equal.

j. Tool kit, one each, equipped with the following tools:

(1) Hammer, Hand, Ball Peen, 1-1/4 Pound, per Fed Spec GGG-H-86, Type II, Class 1, Style A.

(2) Wrench, Pipe, per Fed Spec GGG-W-651, Type VI, Size 14 inch, except the angle shall be 90° and handle shall be aluminum.

(3) Shears, Metal Cutting, Hand Combination, per Fed Spec GGG-S-291, Steel Type II, Class 3, Style B, 7 Inch Nominal Size.

(4) Pliers, Lineman's, per Fed Spec GGG-P-471, Type IX, Class 1, Style B, 8 Inch Nominal Size.

(5) Pliers, Slip Joint, per Fed Spec GGG-P-471, Type II, Class 1, Style A, 10 inch Nominal Size.

(6) Screwdriver, per Fed Spec GGG-S-121, Type I, Class 5, Style 1, Design A, Shape a or b, 8 Inch Nominal Size.

(7) Screwdriver, per Fed Spec GGG-S-121, Type I, Class 5, Style 1, Design A, Shape a or b, 6 Inch Nominal Size.

(8) Screwdriver, per Fed Spec GGG-S-121, Type 1, Class 5, Style 1, Design A, Shape a or b, 4 Inch Nominal Size.

(9) Wrench Set, Knife Type, Socket Head, Snap-On Tool Co., Number AW5K or equal.

(10) Wrench Set, Knife Type, Socket Head (two each) Snap-On Tool Co., Number AW9K or equal.

(11) Screwdriver, Cross Tip, Straight, per Fed Spec GGG-S-121, Type VI, Class 2, Style 1 or 2, Nominal Size 4 inches (Reed and Prince).

(12) Screwdriver, Cross Tip, Straight, per Fed Spec GGG-S-121, Type VI, Class 2, Style 1 or 2, Nominal Size 3 Inches (Reed and Prince).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

(13) Screwdriver, Cross Tip, Straight, per Fed Spec GGG-S-121, Type VI, Class 1, Style 1 or 2, Nominal Size 4 Inches (Phillips).

(14) Chisel, Cold, Flat, 3/4 Inch Edge, per Fed Spec GGG-C-313, Type IV, Class 1.

k. One insulated cutter, H. K. Porter, Inc., Model Number 1, Tool Number 190M or equal - 20,000 volt, 3/8" rated capacity.

l. Three each Pry-Axe, Inc., pry-axe forcible entry tool or equal with instruction manual and leather sheath.

m. Three each, Chicago Regulation Truckman's Belt, W. S. Darlet and Co., Number H992 or equal.

n. Three each, standard industrial goggles, per Fed Spec GG-G-531.

o. Two each electric blowers for cooling aircraft hot brakes. Super Vacuum Manufacturing Co., Inc., Model P164SE or equal.

p. One "Fresno" model no. 701-14 extension-type ladder, or one Duo-Safety Aluminum type 1000-A fire ladder or equal.

q. Unless otherwise specified (See 6.2), furnish one each cartridge operated (cold weather) hand portable, dry chemical fire extinguishers with an Underwriters Laboratory rating of at least 80-B:C. Agent shall be "Purple-K". Extinguishers shall be Ansul Co. Model K-30-E-AF or equal.

r. Unless otherwise specified (See 6.2), furnish two each hand portable, 15 pound Halon 1211 fire extinguishers with an Underwriters Laboratory rating of at least 2-A:2-B:C.

s. Unless otherwise specified (See 6.2), furnish one cartridge operated (cold weather) hand portable, dry chemical fire extinguisher for metal fires; Underwriters Laboratory rating for 6 pounds Magnesium chips. Extinguisher shall be Ansul Co. Model MX-30-D-AF or equal.

t. Plug, conical, six each, 8 inch length by 2 inch diameter base, hardwood material.

u. Plug, conical, six each, 8 inch length by 2 inch diameter base, oil resistance, hard rubber material.

v. Pin, safety, 12 each, in accordance with A7142038. Plugs and safety pins as required in t, u, and v, shall be mounted in brackets on the inside of a compartment door of the utility body.

w. Two Harness cutter Stebco, Inc., part number RN2 or equal. The cutter shall be stowed and secured in storage area above right wheel.

3.5.34 Location of equipment. Final location of furnished equipment shall be determined jointly by the contractor and WR-ALC/MMIRAB during first article evaluation.

3.6 Miscellaneous.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

3.6.1 Gas tanks. Mounted powered equipment shall have a cap with a hand operated screw type vent for preventing gasoline spillage within the vehicle.

3.6.2 Screw threads and fittings. All vehicles, components and accessories shall be equipped with screw threads and fittings based on United States Standards; Metric type threads and fittings, except for spark plugs and headlight adjusters, are not acceptable.

3.6.3 Servicing and adjusting. Prior to acceptance of the vehicle by the Government inspector, contractor shall service and adjust the vehicle for operational use including at least the following: focusing of lights; adjustment of the engine, electrical and brake system; filling and charging of the battery; alinement of front wheels; inflation of all tires; complete lubrication of chassis, engine, and running gear, with grades of lubricants recommended for the ambient air temperature at the delivery point; servicing of cooling system with a solution of ethylene glycol and water in equal parts by volume; and servicing of windshield washer reservoir with water and appropriate additives. When left-dip headlights are specified, headlights shall be adjusted for driving on left side of road.

3.6.4 Shipment of stowed equipment. The equipment described in paragraphs 3.5.30,. 3.5.32a, 3.5.32b, 3.5.32c and 3.5.33a through 3.5.33w and furnished for each truck shall be packed in a separate container(s). This container(s) should be stored on the truck during shipment.

3.6.5 Workmanship. Defective components or parts and assemblies which have been repaired or modified to overcome deficiencies shall not be furnished.

3.7 Recycled material. Recycled and recovered raw materials should be used to the maximum extent possible in lieu of virgin raw materials as long as these materials do not jeopardize the intended use and fully comply with all contract requirements. Materials used shall be free from defects which would affect the performance or maintainability of individual components of the overall assembly.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection shall be classified as follows:

a. Preproduction inspection

b. Quality conformance inspection

4.2.1 Preproduction inspection. Preproduction inspection shall be applied to the preproduction sample submitted in accordance with 3.1. Failure of the preproduction sample to pass the examination or one or more preproduction tests shall be cause for rejection. Preproduction inspection shall consist of the

ZZ-H-561, Grade B, Type I, with six inch NSFHT long handle female couplers on one end and six inch NSFHT long handle male couplers on the opposite end.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4.2.2 Quality conformance inspection. Quality conformance inspection shall be applied to each item prior to being offered for acceptance under the contract. Failure of the machine to pass the examination or one or more tests shall be cause for rejection. Quality conformance inspection shall consist of the following:

a. Examination (4.3)

b. Inspection of preservation, packaging, packing and marking for shipment and storage (4.5).

4.2.3 Preparation for test. All items submitted for tests shall be properly prepared by the contractor for operation. All items of equipment shall be in correct adjustment, lubricated, and serviced for immediate operation. The tests shall be conducted after the equipment has been run-in in accordance with the manufacturer's recommendations.

4.3 Examination. The truck and equipment shall be examined for design, construction, materials, components, electric equipment, and workmanship to determine compliance with the requirements of this specification. Welding shall be uniform and free of such defects as cracks or tears, shrinkage cavities, inclusions, porosity, undercuts, incomplete fusion, flakes or bursts, folds, laps or seams, laminations or old shuts, blisters, scabs or pits as defined in the American Welding Society handbooks. Any deviations from these requirements shall be cause for rejection.

4.4 Tests.

4.4.1 Center of gravity. Determine the center of gravity of the vehicle, with all equipment installed and after servicing with fuel, lubricating oil, and coolant.

4.4.2 Load distribution. The vehicle shall be loaded to the gross vehicle weight. The wheel loadings shall be determined by weighing the load on each wheel and axle separately. Variations from specification requirements shall be cause for rejections.

4.4.3 Determination of ground pressure. The tires shall be inflated to the pressure which is recommended for cross-country and hard surface operation. Ground pressure in excess of this specification shall be cause for rejection.

4.4.4 Slope operation test. The critical angles (both right and left, rear and forward) shall be determined before operation on side slopes. The vehicle shall be loaded for this test. These angles may be determined under static conditions through calculations or by hoisting or jacking of the vehicle. Slope maneuvers shall be made upon courses prepared for testing maximum climb of 30 percent and for testing side slope operation to 20 percent. Failure to meet requirements of the specification shall be cause for rejection.

4.4.5 Performance test. The vehicle shall be loaded to gross vehicle weight. Performance of the vehicle in accordance with the requirements of 3.4 shall be determined. Failure to meet the requirements of the specification shall be cause for rejection. A manufacturer's certificate of compliance is acceptable with the understanding that the contractor warrants the vehicle to perform as required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

4.4.6 Road and cross-country tests. The vehicle shall be loaded to gross vehicle weight. The vehicle shall be operated over improved roads for not less than 500 miles and over cross-country terrain for not less than 10 miles. The vehicle shall be checked for misalignment and damage throughout the tests. Malfunctions and damage to the vehicle or mounted equipment shall be cause for rejection.

4.4.7 Electromagnetic interference. Contractor shall furnish evidence that the truck was suppressed against electromagnetic interference in accordance with para 3.5.2.7. A manufacturer's certification of compliance is acceptable with the understanding that the contractor warrants the vehicle to perform as required.

4.4.8 Gasoline powered equipment. Gasoline powered equipment shall be operated for 15 minutes under load. The 4000 watt generator shall be operated with both smoke injectors (electric fans, see 3.5.33o) and both flood lights (see 3.5.33a) plugged into the generator four electric outlets. During the tests any malfunction or over heating shall be cause for rejection. Items shall be plugged into the generator at 5 second intervals.

4.5 Inspection of preservation, packaging, packing and marking for shipment and storage. Inspection of preservation, packaging, packing and marking for shipment and storage shall be in accordance with the contract requirements.

5. PACKAGING.

5.1 Preparation for delivery shall be in accordance with the contract requirements and for stowed equipment in accordance with MIL-B-12841.

5.2 Marking. Marking for shipment shall be in accordance with the contract requirements and for stowed equipment in accordance with MIL-B-12841.

6. NOTES

6.1 Intended use. The A/S32P-10 truck covered by this specification is intended for use in accomplishing forcible entry and rescue of personnel entrapped in damaged aircraft. The truck has a combination of extinguishers for the combatting of incipient aircraft fires.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Identification of appropriate service for painting and marking (See 3.2.1.1).

c. Concealed marking, if required (See 3.2.1.1).

d. Manufacturer's standard name plate only, if required (See 3.2.1.1).

e. Rustproofing, if required (see 3.2.1.2).

f. If vehicle underbody and undercarriage are not to be undercoated (See 3.2.1.2).

g. If compliance with the Federal Government and all the state air pollu-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

tion control regulation is not required for vehicles (See 3.5.1.1).

h. Towing devices and trailer hitch shall be furnished (See 3.2.1.6).

i. Power plant heaters, if required (See 3.5.1.2).

j. A key operated ignition switch with two removable keys shall be furnished (See 3.5.2.1).

k. Alternator rated capacity shall be 50 amperes minimum (See 3.5.2.2).

l. The type battery and other components described in para 3.5.2.3.1 shall be furnished (See 3.5.2.3).

m. Auxiliary 24 volt system with radio outlet, if required (See 3.5.2.5).

n. Heavy-duty springs, if required (See 3.5.9).

o. Vehicle shall be equipped with single wheels in front and dual wheels in rear (See 3.5.11).

p. If spare wheel and carrier is not required (See 3.5.11.3).

q. If spare tire is not required (See 3.5.11.3.1).

r. If tools are not required (See 3.5.17).

s. Air conditioning when required (See 3.5.19).

t. Truck shall not be painted as specified herein, but as specified elsewhere in the contract (See 3.5.29).

u. Fire extinguishers specified in paragraphs 3.5.33q, r, and s shall not be furnished.

v. Only the items described in paragraph 3.5.23 through 3.5.27 shall be furnished (see 3.5.22a). Quick release type clamps or straps shall be furnished for all applicable equipment required to be furnished and for all the equipment described herein even if not required to be furnished.

Custodian:
Air Force - 99

Preparing Activity:
Air Force-99

Project No 4210-F145

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

1. Utility Body (see 3.5.14)
2. Breathing apparatus (see 3.5.32d)
3. Tool Kit (see 3.5.33j)
4. Cutter (see 3.5.33k)
5. Pry-axe (see 3.5.331)
6. Truckman belt (see 3.5.33m)
7. Manila rope (see 3.5.33h)
8. Goggles (see 3.5.33n)
9. Winch & grapnel hook (see 3.5.23)
10. Breathing apparatus (see 3.5.32a)
11. Three spare air bottles (see 3.5.14)
12. Harness cutter (see 3.5.33w)
13. Ladder (see 3.5.33p)
14. Power Saw (see 3.5.32c)
15. Bookcase (see 3.5.13)
16. Tube cutter (see 3.5.33i)
17. Pike pole (see 3.5.33e)
18. Folding litter (see 3.5.33g)
19. Shovel (see 3.5.33f)
20. Portable generator (see 3.5.33d)
21. Extension cord (see 3.5.33b)
22. Portable floodlight (see 3.5.33a)
23. Speaker (see 3.5.26)
24. Safety pins (see 3.5.33v)
25. Gasoline engine blower (see 3.5.33o)
26. Conical Hardwood Plugs (see 3.5.33t)
27. Telescoping floodlight (see 3.5.24)
28. Roolout Tray (see 3.5.14)
29. Conical Robber Plugs (see 3.5.33u)
30. Rear spotlight (see 3.5.24)
31. Cab spotlight (see 3.5.24)
32. Portable lantern & recharger (see 3.5.32b)
33. Twin beacon visibar (see 3.5.25)
34. Clearance light (see 3.5.24)
35. Rear shelf (see 3.5.14)
36. Warning beacon light (see 3.5.24)
37. Fire extinguishers (see 3.5.33s)
38. Fire extinguishers (see 3.5.33q)
39. Fire extinguishers (see 3.5.33r)
40. Rear ladder to top platform (see 3.5.14)
41. Map light (see 3.5.2.4)
42. Front compartment shelf (see 3.5.14)
43. Fireman axe (see 3.5.30)

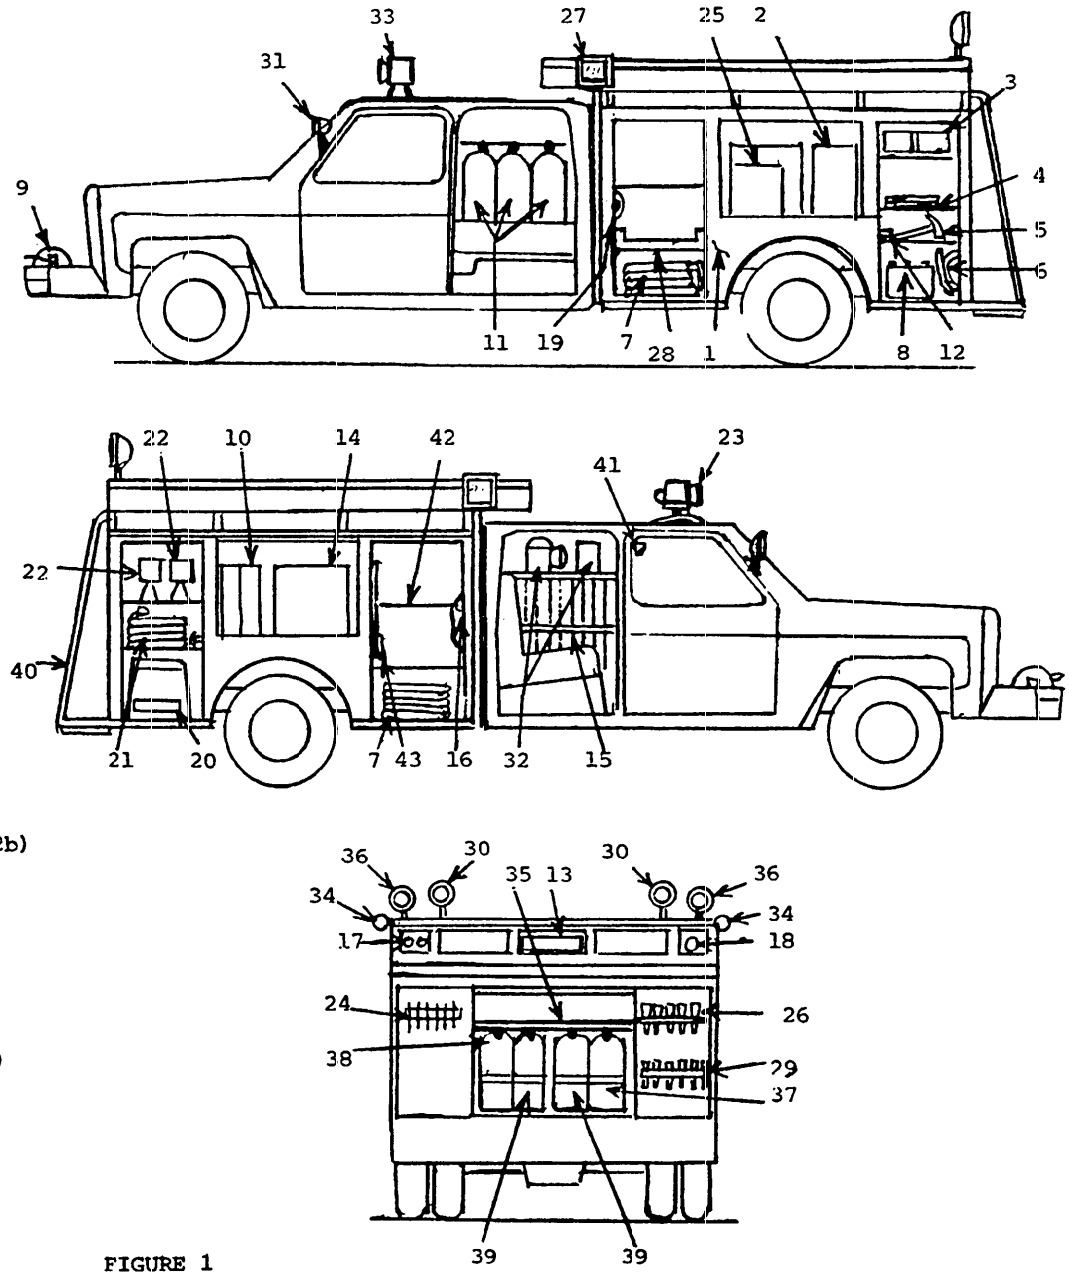


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-T-83965A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:48Z
Check the source to verify that this is the current version before use.