
MIL-C-55302/108A
31 May 1979
Superseding
MIL-C-55302/108
1 August 1975

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, PRINTED WIRING BOARD GENERAL PURPOSE MALE ADAPTER, CONTACT SPACING (.100) TYPE C

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

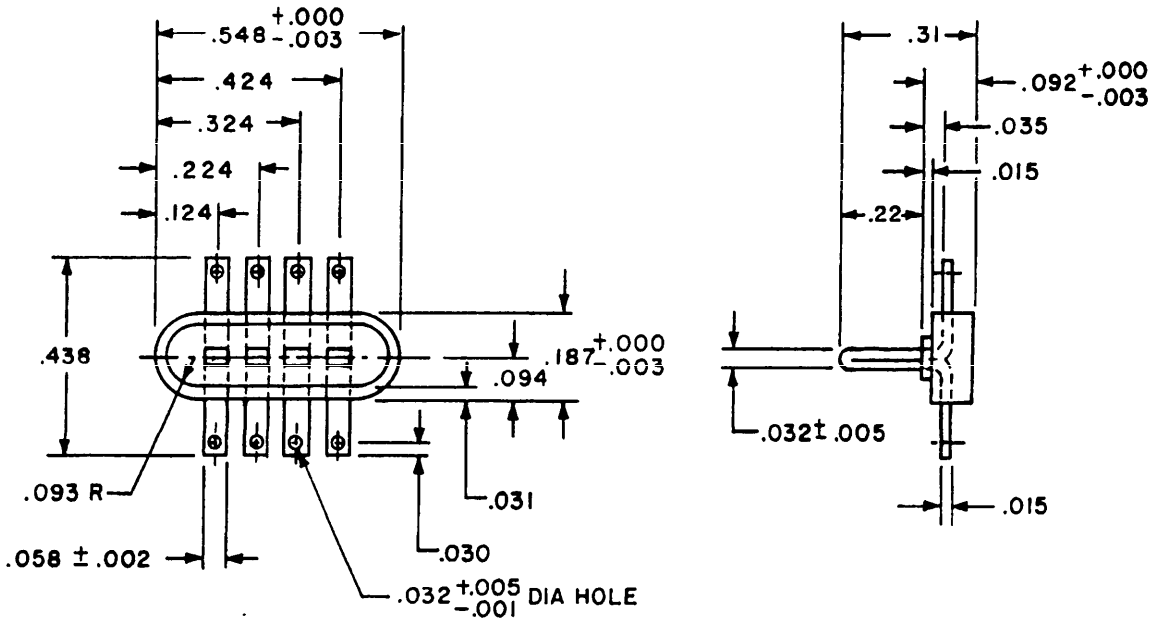

(A) DENOTES CHANGES

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:50Z
Check the source to verify that this is the current version before use.

INCHES	mm	INCHES	mm	INCHES	mm
.001	.03	.032	.81	.187	4.75
.002	.05	.035	.90	.224	5.69
.003	.08	.058	1.47	.310	7.87
.005	.13	.092	2.34	.324	8.23
.010	.25	.093	2.36	.424	10.77
.015	.38	.094	2.39	.438	11.13
.030	.76	.100	2.54	.548	13.92
.031	.79	.124	3.15		

REQUIREMENTS:

1. Connectors are intended for use with MIL-P-7788 or MIL-P-83335 Information Panels. They may be used with either printed circuit board or embedded wiring type panels.

2. Materials:

Contact: Male.

(A) Beryllium copper #25 alloy per QQ-C-533 Cond. A, Heat Treat: per MIL-H-7199 (Rockwell 15N-76.5) Finish: Gold Plate .00005 inch per MIL-C-45204 Type I, Grade C or D, Class 1 over a nickle underplating. The nickle shall be plated in accordance with QQ-N-290, Class 1, Grade B.

Housing: Plug.

-1 Plastic, Methacrylate in accordance with L-P-380.

(A) -2 Plastic, Polyvinylide Fluoride in accordance with MIL-P-46122, Type I, Grade E.

3. Contact current rating: 3.0 ampere max.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:50Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.


2. Unless otherwise specified, tolerance is ± .010.

3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

4. Qualification Testing: In addition to the applicable requirements of MIL-C-55302 the male plug contacts shall be tested for deformation. The contacts shall withstand a force of 5 lbs. applied at right angles to the contact surface without permanent deformation.

5. The government has a royalty-free license under U.S. Patent No. 3,649,953 dated March 14, 1972 entitled "Self-Locating Electrical Connector for large planar surfaces" for the benefit of manufacture of this connector either for the government or for use in equipment to be delivered to the government.

6. Example of part number:

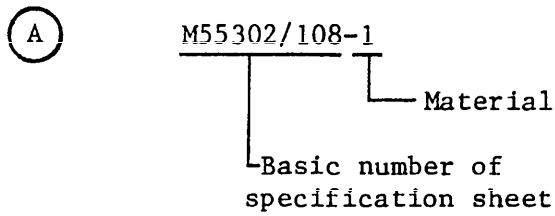

Custodians:
Army - AV
Navy - AS
Air Force - 17

Review Activities:
Army - MI
Air Force - 99, 11

Preparing Activity
Navy - AS
(Project No. 5935-3111)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:50Z
Check the source to verify that this is the current version before use.