
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, BAYONET COUPLING, UMBILICAL RECEPTACLE, JAM NUT MOUNTING, RFI SHIELDED, CRIMP CONTACT, CLASS E

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-81582.

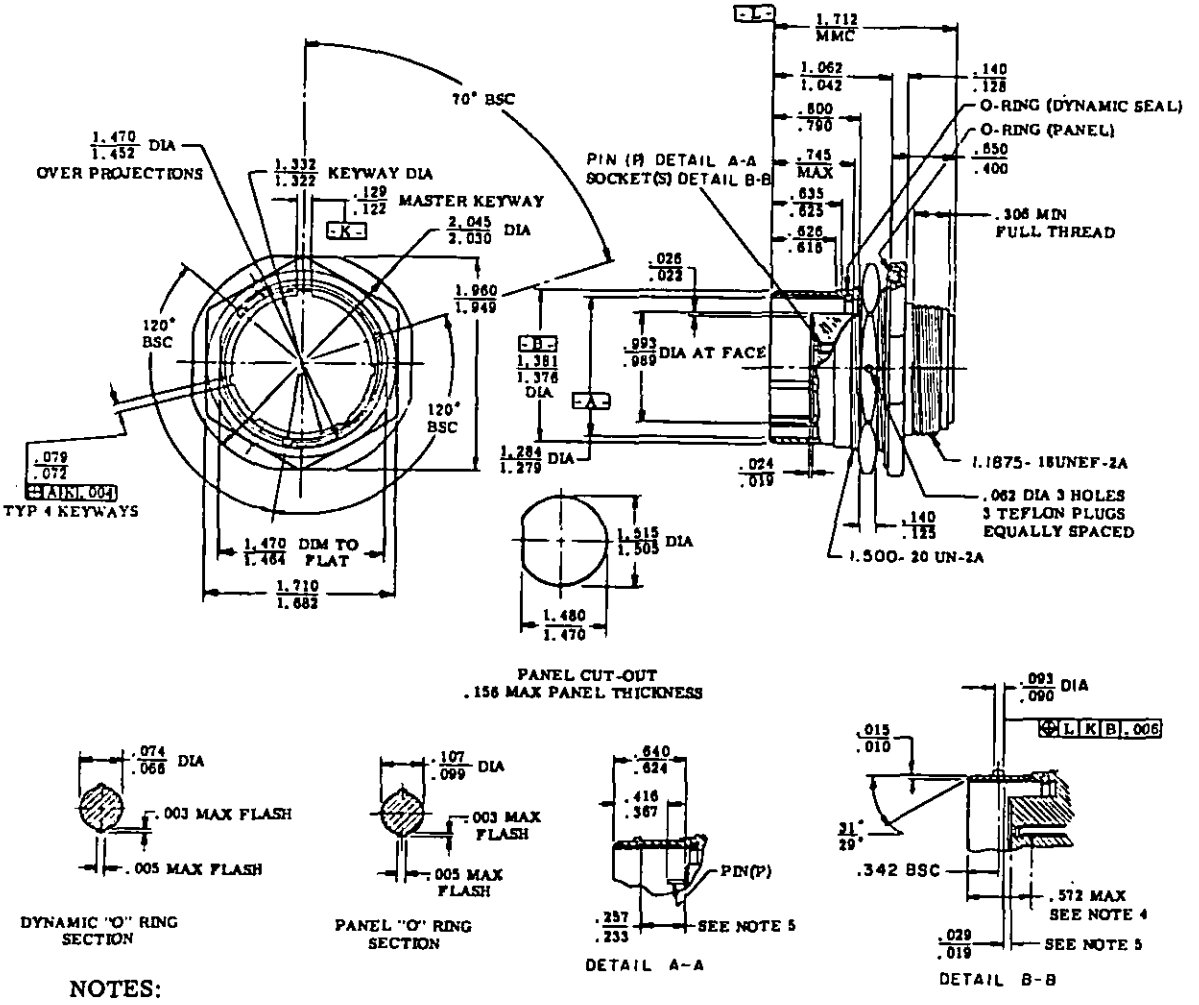


NOTES:

1. Unless otherwise specified, dimensions in inches, tolerances: decimals ±.010, angles ±1/2°.
2. Dimensions shown apply after plating.
3. Normal mating keyway location shown.
4. Distance from front of shell to the point at which a gage pin, having the same basic diameter as the mating contact with a square end, engages the socket contact spring.
5. Distance from back of bayonet pin to face of insert.
6. Shell size 22.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:45Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.074	1.88	.306	7.77	.745	18.92	1.452	36.88
.004	.10	.079	2.01	.342	8.70	.790	20.07	1.464	37.19
.005	.13	.090	2.29			.800	20.32	1.470	37.34
.006	.15	.093	2.36	.367	9.32	.989	25.12	1.480	37.59
.010	.25	.099	2.51	.400	10.16	.993	25.22	1.500	38.10
.015	.38	.107	2.72	.416	10.57	1.042	26.47	1.505	38.23
.019	.48	.122	3.10	.572	14.53	1.062	26.97	1.515	38.48
.022	.56	.125	3.18	.616	15.65	1.1875	30.16	1.682	42.72
.024	.61	.128	3.25	.624	15.85	1.279	32.49	1.710	43.43
.026	.66	.129	3.28	.625	15.88	1.284	32.61	1.712	43.48
.029	.74	.140	3.56	.626	15.90	1.322	33.58	1.949	49.50
.062	1.57	.156	3.96	.635	16.13	1.332	33.83	1.960	49.78
.066	1.68	.233	5.92	.640	16.26	1.376	34.95	2.030	51.56
.072	1.83	.257	6.53	.650	16.51	1.381	35.08	2.045	51.94

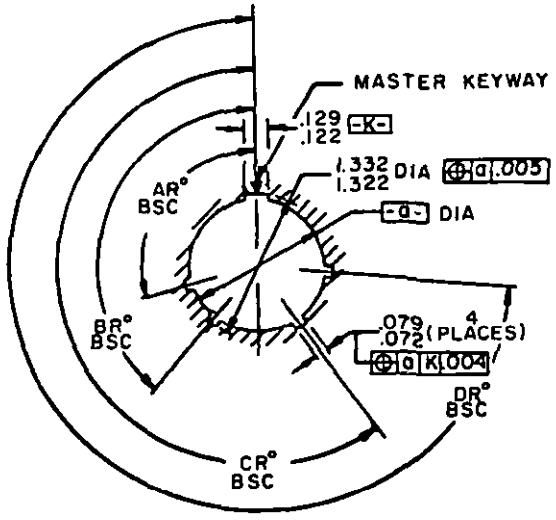

KEYWAY POSITIONS
RECEPTACLE TYPE SHELL
SHELL SIZE 22
FRONT FACE VIEW

Key and keyway position number	AR°, AP° Basic	BR°, BP° Basic	CR°, CP° Basic	DR°, DP° Basic
A (normal)	105	140	215	265
B	18	149	192	259
C	92	152	222	342
D	84	152	204	334
E	24	135	199	240
F	98	152	268	330

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Insert arrangements: Shall be as specified in MIL-STD-1672.

Service rating: I.

Socket contacts: Socket contacts shall conform to MS24255.

Pin contacts: Pin contacts shall conform to MS24254.

Weight: The weight, including contacts, mounting nut and O-rings, shall not exceed 0.31 pound.

Connectors: All requirements of MIL-C-81582 for connectors shall apply, except as follows:
Shell material: Shall be corrosion resisting steel per QQ-S-764, Type 303 SE.
Finish: The shell finish shall be cadmium plate per QQ-P-416, Type II, Class 3. The resultant finish shall be clear to light iridescent. A preliminary plating of silver shall not be used.
Dielectric material: Rigid dielectric material shall be glass filled moldable epoxy on socket contact connectors.
Contact retention: The contact retention test shall be done without rear accessories, and minimum axial loads shall be 20 pounds for size 20 contacts and 30 pounds for size 12 contacts.
Lubricating oil: Aircraft engine lubricating oil conforming to MIL-L-27502 shall be used in the fluid immersion test in lieu of MIL-L-23699 lubricating oil.
Fluid immersion test: During qualification testing, the front insert of sample number four connectors only shall be subjected to the fluid immersion test using JP-5 fuel in accordance with MIL-J-5624.

Mating connector: See MIL-C-81582/2.

Insertion and extraction tools: See MS24256.

Grommet sealing plugs: See MS27186-1.


Cable support: See MS27291.

Right angle conduit adapter: See MS27557-7.

Closed right angle cable support: See MS27558-7.

Right angle cable support: See MS27559-7.

Part number M81582/1E03SA is the same as M81582/1E3-SA1 of previous revisions.

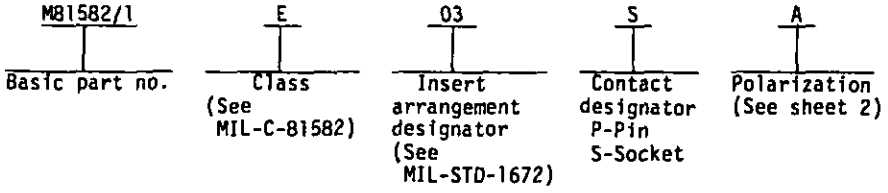

Custodians:
Army - EL
Navy - AS
Air Force - 80

Review activities:
Army - MU
Navy - EC
Air Force - 11, 15, 80
DSA - ES

User activity:
Navy - SH

Preparing activity:
Navy - AS

Agent:
DSA - ES

(Project 5935-1953-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:45Z
Check the source to verify that this is the current version before use.