MILITARY SPECIFICATION

RAIN REPELLENT FLUID APPLICATION SYSTEM AIRCRAFT WINDSHIELD

This amendment forms a part of Military Specification MIL-R-81589(AS) dated 27 August 1968 and has been approved by the Naval Air Systems Command, Department of the Navy.

Add: Figure 1
Figure 2
Figure 3 and Figure 4
Figure 5

Preparing Activity:
Navy - AS
Project No. 1680-N207

FSC-1680

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:45Z
Check the source to verify that this is the current version before use.

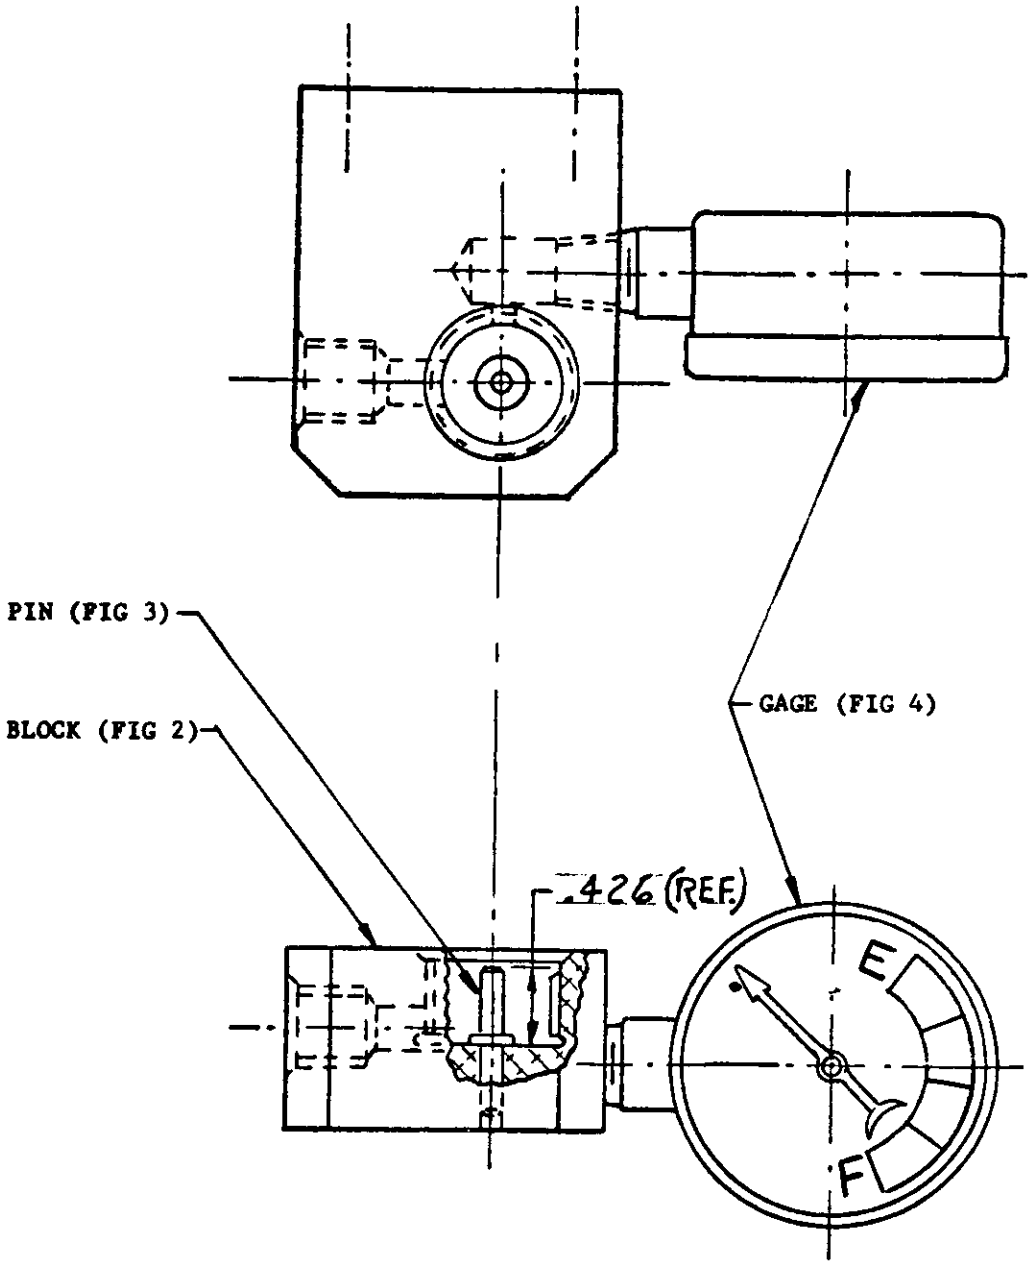


FIGURE 1. CONTAINER ADAPTER BLOCK ASSY.
(LEFT HAND SHOWN, RIGHT HAND OPPOSITE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:45Z
Check the source to verify that this is the current version before use.

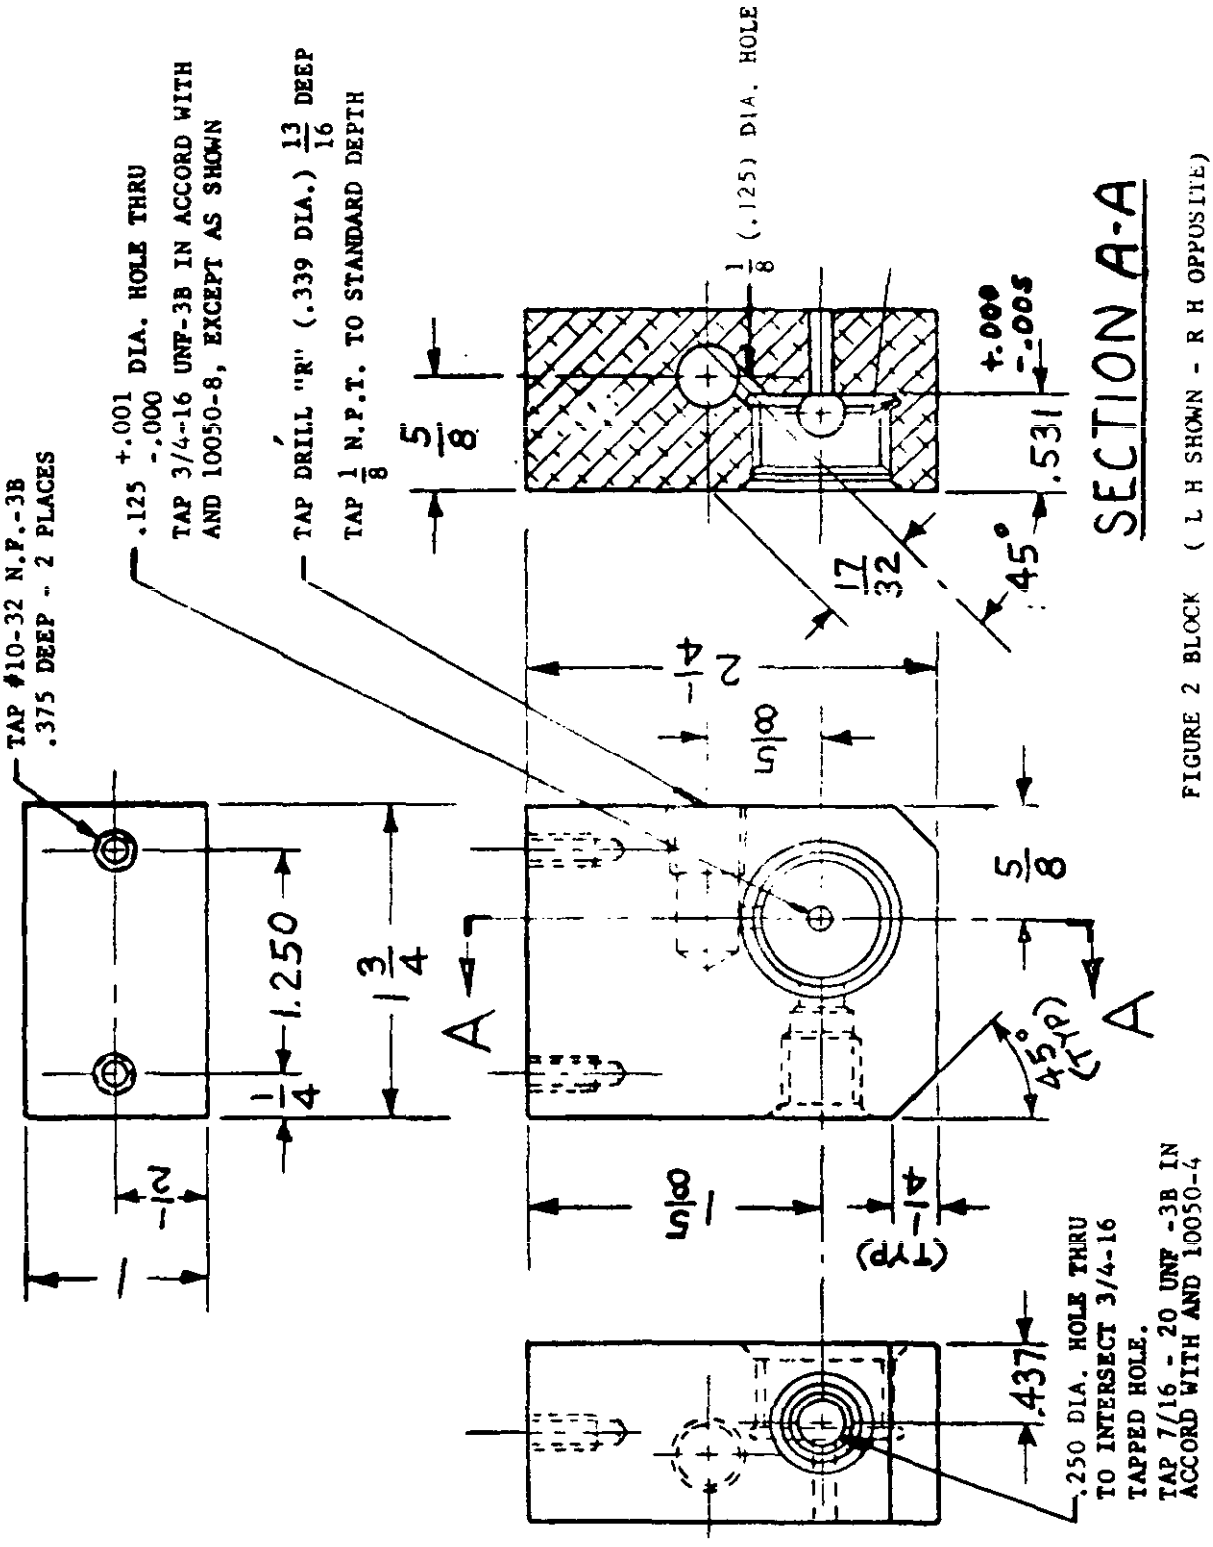


FIGURE 2 BLOCK (L H SHOWN - R H OPPOSITE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:45Z
Check the source to verify that this is the current version before use.

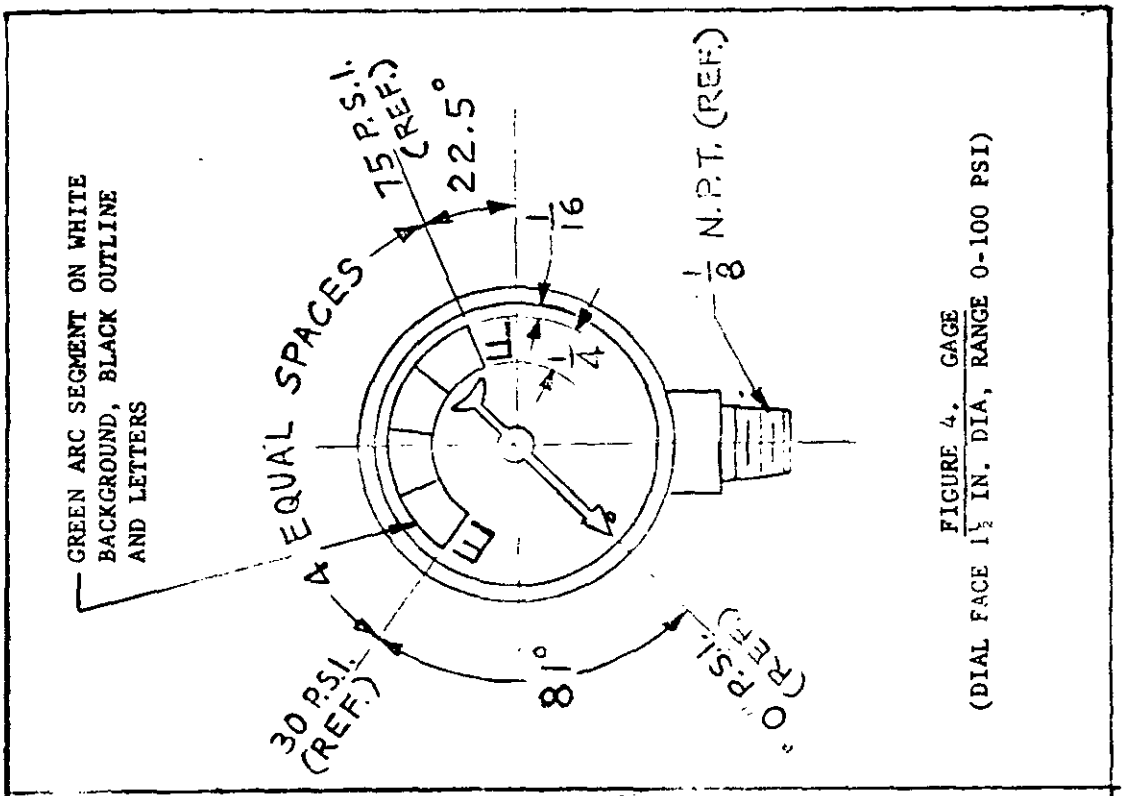


FIGURE 4. GAGE
(DIAL FACE 1½ IN. DIA, RANGE 0-100 PSI)


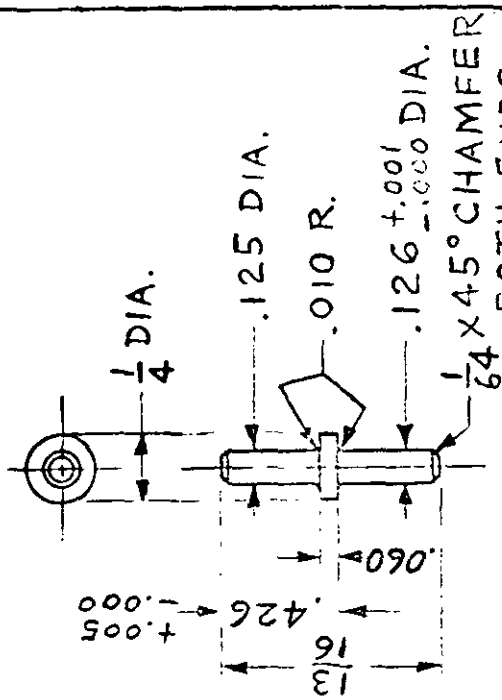


FIGURE 3. PIN
(STAINLESS STEEL)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:45Z
Check the source to verify that this is the current version before use.

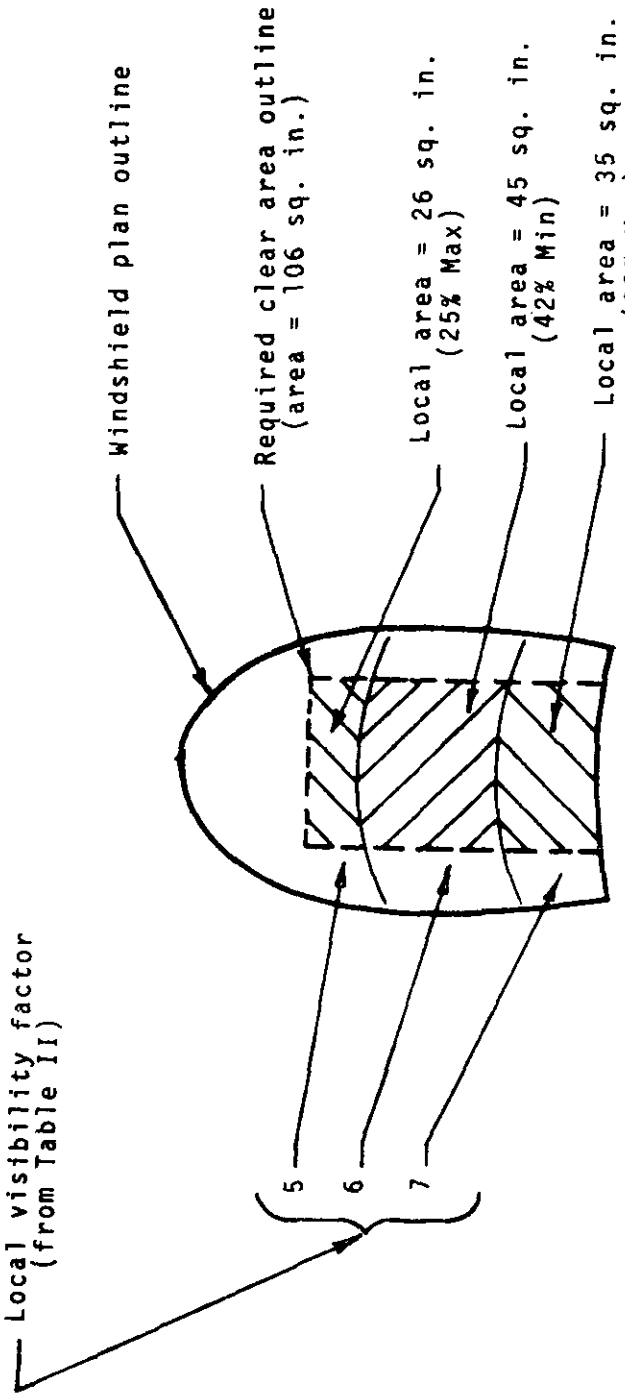

$$\text{Visibility index} = \frac{5x26 + 6x45 + 7x35}{26 + 45 + 35} = \frac{645}{106} = 6.1$$

Figure 5. Sample Visibility Index Computation

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969- 341-517/A-4667

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:45Z
Check the source to verify that this is the current version before use.