INCH-POUND


MIL-C-123/19
9 March 1990

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED WITH STANDOFFS, STYLE CKS05S

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-123.

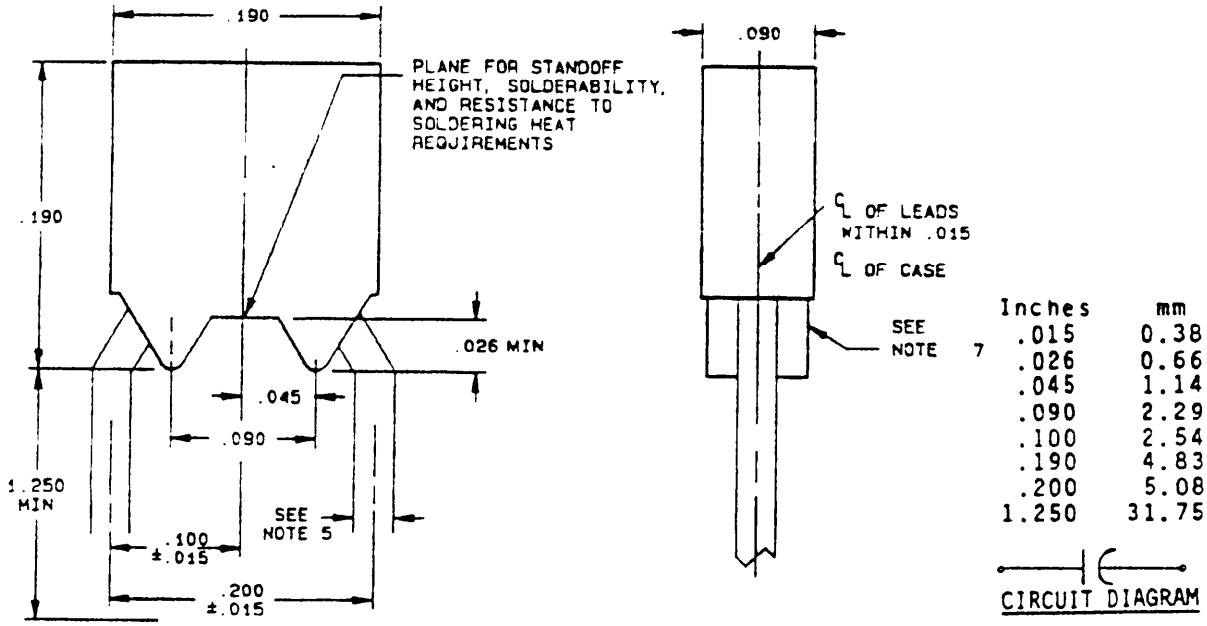

Inches	mm
.015	0.38
.026	0.66
.045	1.14
.090	2.29
.100	2.54
.190	4.83
.200	5.08
1.250	31.75

CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Lead length may be a minimum of .625 (15.88 mm) for use in tape and reel automatic insertion equipment, when specified.
5. Lead diameter shall be .023 (0.58 mm) to .029 (0.74 mm).
6. Standoffs shall be of triangular shape so that the standoff will provide line contact with the surface upon which the capacitor is mounted.
7. Thickness of the standoffs shall be .075 (1.90 mm) to the body thickness.
8. Insulating coating shall not extend more than .010 (0.25 mm) along lead wires.
9. At the option of the user, this capacitor style may be furnished as a replacement for style CKS05 (MIL-C-123/1) of the same capacitance, capacitance tolerance, characteristic, and rated voltage.

FIGURE 1. Style CKS05S capacitors.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-16T05:15Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS05S characteristics.

Part number 1/	Capacitance (pF)	Capacitance tolerance	Voltage-temperature limits	Rated voltage (V dc)
M123A19BPC4R7-C	4.7	CD	BP	100
M123A19BPC5R1-C	5.1	"	"	"
M123A19BPC5R6-C	5.6	"	"	"
M123A19BPC6R2-C	6.2	"	"	"
M123A19BPC6R8-C	6.8	"	"	"
M123A19BPC7R5-C	7.5	"	"	"
M123A19BPC8R2-C	8.2	"	"	"
M123A19BPC9R1-C	9.1	"	"	"
M123A19BPC100-C	10	CJK	"	"
M123A19BPC110-C	11	"	"	"
M123A19BPC120-C	12	"	"	"
M123A19BPC130-C	13	"	"	"
M123A19BPC150-C	15	"	"	"
M123A19BPC160-C	16	"	"	"
M123A19BPC180-C	18	"	"	"
M123A19BPC200-C	20	"	"	"
M123A19BPC220-C	22	"	"	"
M123A19BPC240-C	24	"	"	"
M123A19BPC270-C	27	FJK	"	"
M123A19BPC300-C	30	"	"	"
M123A19BPC330-C	33	"	"	"
M123A19BPC360-C	36	"	"	"
M123A19BPC390-C	39	"	"	"
M123A19BPC430-C	43	"	"	"
M123A19BPC470-C	47	"	"	"
M123A19BPC510-C	51	"	"	"
M123A19BPC560-C	56	"	"	"
M123A19BPC620-C	62	"	"	"
M123A19BPC680-C	68	"	"	"
M123A19BPC750-C	75	"	"	"
M123A19BPC820-C	82	"	"	"
M123A19BPC910-C	91	"	"	"
M123A19BPC101-C	100	"	"	"
M123A19BPC111-C	110	"	"	"
M123A19BPC121-C	120	"	"	"
M123A19BPC131-C	130	"	"	"
M123A19BPC151-C	150	"	"	"
M123A19BPC161-C	160	"	"	"
M123A19BPC181-C	180	"	"	"
M123A19BPC201-C	200	"	"	"
M123A19BPC221-C	220	"	"	"
M123A19BPC241-C	240	"	"	"
M123A19BPB271-C	270	"	"	50
M123A19BPB301-C	300	"	"	"
M123A19BPB331-C	330	"	"	"
M123A19BPB361-C	360	"	"	"
M123A19BPB391-C	390	"	"	"
M123A19BPB431-C	430	"	"	"
M123A19BPB471-C	470	"	"	"
M123A19BPB511-C	510	"	"	"
M123A19BPB561-C	560	"	"	"
M123A19BPB621-C	620	"	"	"

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:15Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS05S characteristics - Continued.

Part number 1/	Capacitance (pF)	Capacitance tolerance	Voltage-temperature limits	Rated voltage (V dc)
M123A19BPB681-C	680	FJK	BP	50
M123A19BPB751-C	750	"	"	"
M123A19BPB821-C	820	"	"	"
M123A19BPB911-C	910	"	"	"
M123A19BPB102-C	1000	"	"	"
M123A19BPB112-C	1100	"	"	"
M123A19BPB122-C	1200	"	"	"
M123A19BPB132-C	1300	"	"	"
M123A19BPB152-C	1500	"	"	"
M123A19BPB162-C	1600	"	"	"
M123A19BPB182-C	1800	"	"	"
M123A19BPB202-C	2000	"	"	"
M123A19BPB222-C	2200	"	"	"
M123A19BPB242-C	2400	"	"	"
M123A19BPB272-C	2700	"	"	"
M123A19BXC271KC	270	K	BX	100
M123A19BXC331KC	330	"	"	"
M123A19BXC391KC	390	"	"	"
M123A19BXC471KC	470	"	"	"
M123A19BXC561KC	560	"	"	"
M123A19BXC681KC	680	"	"	"
M123A19BXC821KC	820	"	"	"
M123A19BXC102KC	1000	"	"	"
M123A19BXC122KC	1200	"	"	"
M123A19BXC152KC	1500	"	"	"
M123A19BXC182KC	1800	"	"	"
M123A19BXC222KC	2200	"	"	"
M123A19BXC272KC	2700	"	"	"
M123A19BXC332KC	3300	"	"	"
M123A19BXC392KC	3900	"	"	"
M123A19BXC472KC	4700	"	"	"
M123A19BXB562KC	5600	"	"	50
M123A19BXB682KC	6800	"	"	"
M123A19BXB822KC	8200	"	"	"
M123A19BXB103KC	10000	"	"	"

1/ The complete part number shall include a symbol to indicate capacitance tolerance, as applicable.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Molded or preform.

Lead wire: Type C of MIL-C-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 1.

Source: https://assist.dla.mil -- Downloaded: 202610-16T05:15Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 85
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-1649-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:15Z
Check the source to verify that this is the current version before use.