
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED WITH STANDOFFS, STYLE CKS06S

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-123.

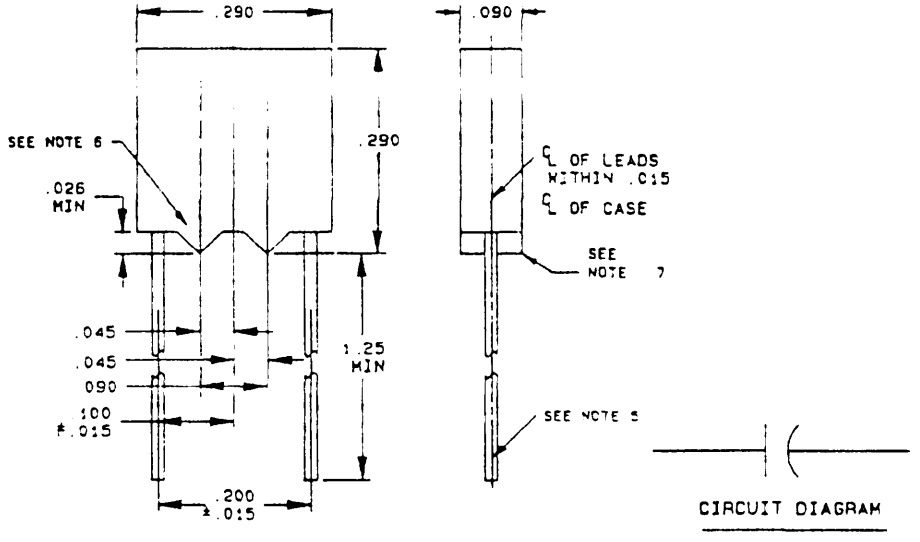

Inches	mm
.015	0.38
.026	0.66
.045	1.14
.090	2.29
.100	2.54
.200	5.08
.290	7.37
1.25	31.8

CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Lead length may be a minimum of .625 (15.88 mm) for use in tape and reel automatic insertion equipment, when specified.
5. Lead diameter shall be .023 (0.58 mm) to .029 (0.74 mm).
6. Standoffs shall be of triangular shape so that the standoff will provide line contact with the surface upon which the capacitor is mounted. The shape of the triangle is optional.
7. Thickness of the standoffs shall be .075 (1.90 mm) to the body thickness.
8. Insulating coating shall not extend more than .010 (0.25 mm) along lead wires.
9. At the option of the user, this capacitor style may be furnished as a replacement for style CKS06 (MIL-C-123/2) of the same capacitance, capacitance tolerance, characteristic, and rated voltage.

FIGURE 1. Style CKS06S capacitors.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20261O-16T05:15Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS06S characteristics.

Part number 1/	Capacitance (pF)	Capacitance tolerance	Voltage-temperature limits	Rated voltage (V dc)
M123A20BPC271-C	270	FJK	BP	100
M123A20BPC301-C	300	"	"	"
M123A20BPC331-C	330	"	"	"
M123A20BPC361-C	360	"	"	"
M123A20BPC391-C	390	"	"	"
M123A20BPC431-C	430	"	"	"
M123A20BPC471-C	470	"	"	"
M123A20BPC511-C	510	"	"	"
M123A20BPC561-C	560	"	"	"
M123A20BPC621-C	620	"	"	"
M123A20BPC681-C	680	"	"	"
M123A20BPC751-C	750	"	"	"
M123A20BPC821-C	820	"	"	"
M123A20BPC911-C	910	"	"	"
M123A20BPC102-C	1000	"	"	"
M123A20BPC112-C	1100	"	"	"
M123A20BPC122-C	1200	"	"	"
M123A20BPC132-C	1300	"	"	"
M123A20BPC152-C	1500	"	"	"
M123A20BPC162-C	1600	"	"	"
M123A20BPC182-C	1800	"	"	"
M123A20BPC202-C	2000	"	"	"
M123A20BPC222-C	2200	"	"	"
M123A20BPC242-C	2400	"	"	"
M123A20BPB272-C	2700	"	"	50
M123A20BPB302-C	3000	"	"	"
M123A20BPB332-C	3300	"	"	"
M123A20BPB362-C	3600	"	"	"
M123A20BPB392-C	3900	"	"	"
M123A20BPB432-C	4300	"	"	"
M123A20BPB472-C	4700	"	"	"
M123A20BXC562KC	5600	K	BX	100
M123A20BXC682KC	6800	"	"	"
M123A20BXC822KC	8200	"	"	"
M123A20BXC103KC	10000	"	"	"
M123A20BXC123KC	12000	"	"	"
M123A20BXC153KC	15000	"	"	"
M123A20BXC183KC	18000	"	"	"
M123A20BXC223KC	22000	"	"	"
M123A20BXC273KC	27000	"	"	"
M123A20BXC333KC	33000	"	"	"
M123A20BXC393KC	39000	"	"	"
M123A20BXC473KC	47000	"	"	"
M123A20BXC563KC	56000	"	"	"
M123A20BXC683KC	68000	"	"	"
M123A20BXC823KC	82000	"	"	"
M123A20BXC104KC	100000	"	"	"

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:15Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS06S characteristics - Continued.

Part number 1/	Capacitance (pF)	Capacitance tolerance	Voltage-temperature limits	Rated voltage (V dc)
M123A20BXB563KC	56000	K	BX	50
M123A20BXB683KC	68000	"	"	"
M123A20BXB823KC	82000	"	"	"
M123A20BXB104KC	100000	"	"	"
M123A20BXB124KC	120000	"	"	"
M123A20BXB154KC	150000	"	"	"
M123A20BXB184KC	180000	"	"	"
M123A20BXB224KC	220000	"	"	"
M123A20BXB274KC	270000	"	"	"
M123A20BXB334KC	330000	"	"	"
M123A20BXB394KC	390000	"	"	"
M123A20BXB474KC	470000	"	"	"

1/ The complete part number will include a symbol to indicate capacitance tolerance, as applicable.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Molded or preform.

Lead wire: Type C of MIL-C-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 2.

CONCLUDING MATERIAL

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 85
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-1649-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:15Z
Check the source to verify that this is the current version before use.

...issue of the Department of Defense ... specified herein, copies of these documents shall be those listed in the