
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, NONLEADED, STYLE CKS53

This specification sheet is approved for use by the George C. Marshall Space Flight Center, National Aeronautics and Space Administration, and is available for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-123(NA).

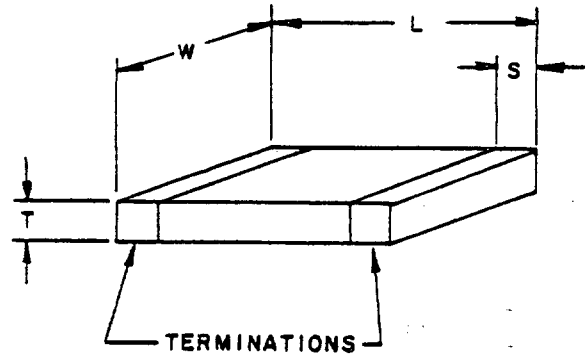

INCHES	MM
.010	.25
.015	.38
.020	.51
.065	1.65
.080	2.03
.180	4.57

Dimensions				
		T		
L ±.015	W ±.015	Min.	Max.	S ±.010
.180	.080	.020	.065	.020

NOTE: Dimensions are in inches.



CIRCUIT DIAGRAM

FIGURE 1. Style CKS53 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:13Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS53 characteristics.

Part number 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts, dc
M123A12BPB301--	300	FJK	BP	50
M123A12BPB331--	330			
M123A12BPB361--	360			
M123A12BPB391--	390			
M123A12BPB431--	430			
M123A12BPB471--	470			
M123A12BPB511--	510			
M123A12BPB561--	560			
M123A12BPB621--	620			
M123A12BPB681--	680			
M123A12BPB751--	750			
M123A12BPB821--	820			
M123A12BPB911--	910			
M123A12BPB102--	1000			
M123A12BXB562K-	5600	K	BX	
M123A12BXB682K-	6800			
M123A12BXB822K-	8200			
M123A12BXB103K-	10000			
M123A12BXB123K-	12000			
M123A12BXB153K-	15000			
M123A12BXB183K-	18000			
M123A12BXB223K-	22000			
M123A12BXB273K-	27000			
M123A12BXB333K-	33000			
M123A12BXB473K-	47000			
M123A12BXB563K-	56000			
M123A12BXB683K-	68000			
M123A12BXB823K-	82000			
M123A12BXB104K-	100000			

1/ The complete part number will include additional symbol(s) to indicate capacitance tolerance and termination, as applicable.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Multi-layer, unencapsulated, monolithic ceramic.

Termination: M, N, R or S.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55° to +125°C.

Voltage rating: 50 volts, dc.

Marking: In accordance with MIL-C-123(NA).

Custodian:
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 11, 19
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-K353-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* — Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* — Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* — Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:13Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 4966 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Commander
Defense Logistics Agency
DESC-ESD
Dayton OH 45444

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:13Z
Check the source to verify that this is the current version before use.