
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, NONLEADED, STYLE CKS54

This specification sheet is approved for use by the George C. Marshall Space Flight Center, National Aeronautics and Space Administration, and is available for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-123(NA).

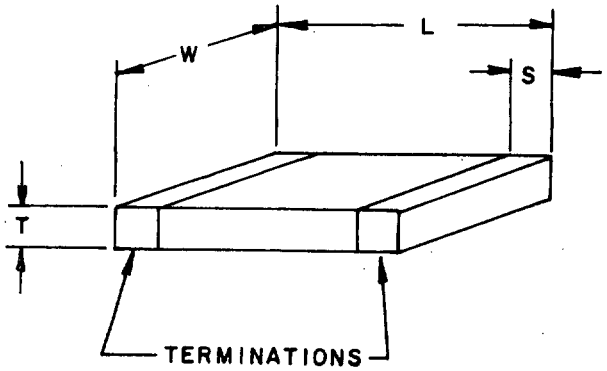

Dimensions				
		T		
L ±.015	W ±.015	Min.	Max.	S ±.010
.220	.250	.020	.070	.020

INCHES	MM
.010	.25
.015	.38
.020	.51
.070	1.78
.220	5.59
.250	6.35

NOTE: Dimensions are in inches.



CIRCUIT DIAGRAM

FIGURE 1. Style CKS54 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:13Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS54 characteristics.

Part number 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts, dc
M123A13BPB112--	1100	F JK	BP	50
M123A13BPB122--	1200			
M123A13BPB132--	1300			
M123A13BPB152--	1500			
M123A13BPB162--	1600			
M123A13BPB182--	1800			
M123A13BPB202--	2000			
M123A13BPB222--	2200			
M123A13BPB242--	2400			
M123A13BPB272--	2700			
M123A13BPB302--	3000			
M123A13BPB332--	3300			
M123A13BPB362--	3600			
M123A13BPB392--	3900			
M123A13BPB432--	4300			
M123A13BPB472--	4700			
M123A13BPB512--	5100			
M123A13BPB562--	5600			
M123A13BPB622--	6200			
M123A13BPB682--	6800			
M123A13BPB752--	7500			
M123A13BPB822--	8200			
M123A13BPB912--	9100			
M123A13BPB103--	10000			
M123A13BXB124K-	120000	K	BX	
M123A13BXB154K-	150000			
M123A13BXB184K-	180000			
M123A13BXB224K-	220000			
M123A13BXB274K-	270000			
M123A13BXB334K-	330000			
M123A13BXB394K-	390000			
M123A13BXB474K-	470000			

1/ The complete part number will include additional symbol(s) to indicate capacitance tolerance and termination, as applicable.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Multi-layer, unencapsulated, monolithic ceramic.

Termination: M, N, R or S.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55° to +125°C.

Voltage rating: 50 volts, dc.

Marking: In accordance with MIL-C-123(NA).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:13Z
Check the source to verify that this is the current version before use.

Custodian:
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 11, 19
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-K353-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:13Z
Check the source to verify that this is the current version before use.