NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


INCH-POUND
MIL-PRF-123/13B(NA)
28 September 1994
SUPERSEDING
MIL-C-123/13A(NA)
27 August 1990

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, NONLEADED, STYLE CKS54

This specification sheet is approved by the Goddard Space Flight Center, National Aeronautics and Space Administration, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-123.

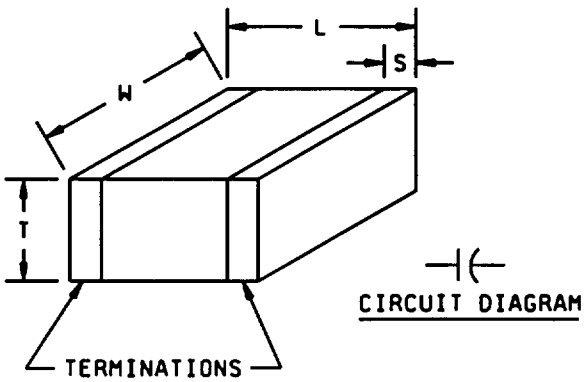

L	W	T		S
±.015	±.015	Min	Max	±.010
.220	.250	.020	.070	.020

Inches	mm
.010	0.25
.015	0.38
.020	0.51
.070	1.78
.220	5.59
.250	6.35

NOTES:
1. Dimensions are in inches.
2. Dimensions and tolerances are for bare chips. For solder coated terminations, add .025 inch (0.64 mm) to the positive length tolerance and .015 inch to the positive width and thickness tolerances.

FIGURE 1. Style CKS54 capacitors.

(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Multilayer, unencapsulated, monolithic ceramic.

(B) Termination: In accordance with MIL-C-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Rated voltage: 50 volts, dc.

Marking: In accordance with MIL-C-123.

TABLE I. Style CKS54 characteristics.

Part or Identifying 1/ Number (PIN)	Capacitance	Capacitance tolerance	Voltage-temperature limits
	pF		
M123A13BPB112--	1100	FJK	BP
M123A13BPB122--	1200	"	"
M123A13BPB132--	1300	"	"
M123A13BPB152--	1500	"	"
M123A13BPB162--	1600	"	"
M123A13BPB182--	1800	"	"
M123A13BPB202--	2000	"	"
M123A13BPB222--	2200	"	"
M123A13BPB242--	2400	"	"
M123A13BPB272--	2700	"	"
M123A13BPB302--	3000	"	"
M123A13BPB332--	3300	"	"
M123A13BPB362--	3600	"	"
M123A13BPB392--	3900	"	"
M123A13BPB432--	4300	"	"
M123A13BPB472--	4700	"	"
M123A13BPB512--	5100	"	"
M123A13BPB562--	5600	"	"
M123A13BPB622--	6200	"	"
M123A13BPB682--	6800	"	"
M123A13BPB752--	7500	"	"
M123A13BPB822--	8200	"	"
M123A13BPB912--	9100	"	"
M123A13BPB103--	10,000	"	"
M123A13BXB124K-	120,000	K	BX
M123A13BXB154K-	150,000	"	"
M123A13BXB184K-	180,000	"	"
M123A13BXB224K-	220,000	"	"
M123A13BXB274K-	270,000	"	"
M123A13BXB334K-	330,000	"	"
M123A13BXB394K-	390,000	"	"
M123A13BXB474K-	470,000	"	"

1/ The complete PIN will include additional symbol(s) to indicate capacitance tolerance and termination, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:13Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 19
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-K483)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:13Z
Check the source to verify that this is the current version before use.