INCH-POUND
MIL-PRF-123/17
21 November 1989

NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS23

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-123.

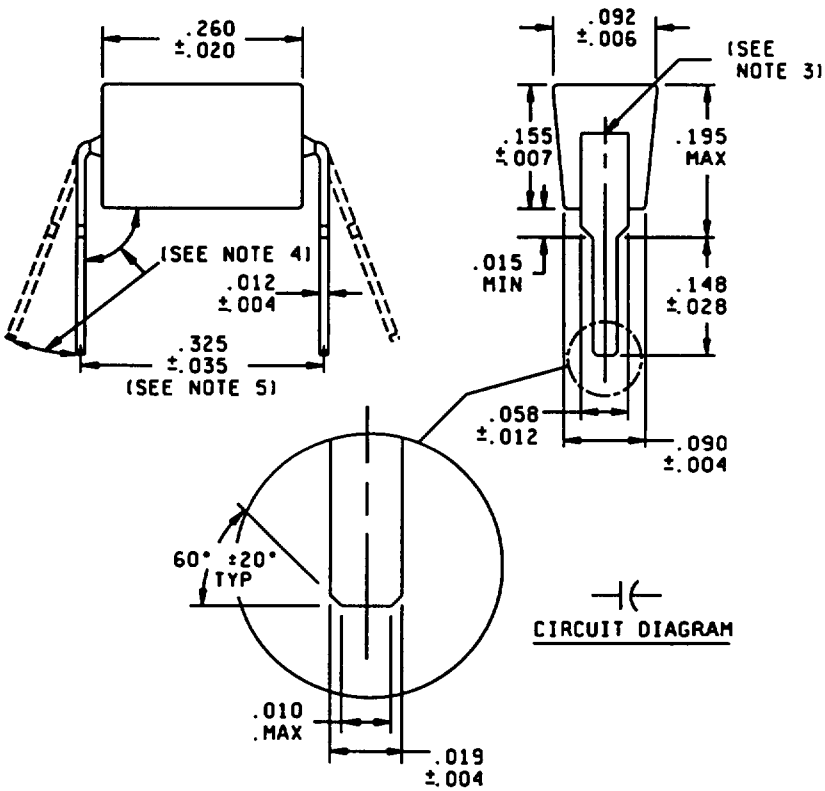


FIGURE 1. Style CKS23 capacitors.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:14Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.004	0.10	.035	0.89
.006	0.15	.058	1.47
.007	0.18	.090	2.29
.010	0.25	.092	2.34
.012	0.30	.148	3.76
.015	0.38	.155	3.94
.019	0.48	.195	4.95
.020	0.51	.260	6.60
.028	0.71	.325	8.26

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Leads shall be centered within ±.005 (0.13 mm).
4. The angle shall be 95° +10°, -5°.
5. The distance between the centers of the mounting holes will be .300 ±.010 inch (7.62 ±0.25 mm).
6. Nonconductive material shall not extend beyond .030 inch (0.76 mm) from the edge of the capacitor body.

FIGURE 1. Style CKS23 capacitors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:14Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS23 characteristics.

Part number 1/	Capacitance (pF)	Capacitance tolerance	Voltage-temperature limits	Rated voltage (V dc)
M123A17BPD561-C	560	F,J,K	BP	200
M123A17BPD681-C	680	"	"	"
M123A17BPD821-C	820	"	"	"
M123A17BPD102-C	1000	"	"	"
M123A17BPD122-C	1200	"	"	"
M123A17BPC272-C	2700	"	"	100
M123A17BPC332-C	3300	"	"	100
M123A17BPB472-C	4700	"	"	50
M123A17BPB562-C	5600	"	"	"
M123A17BPB682-C	6800	"	"	"
M123A17BPB822-C	8200	"	"	"
M123A17BPB103-C	10000	"	"	"
M123A17BXD102-C	1000	K,M	BX	200
M123A17BXD122KC	1200	K	"	"
M123A17BXD152-C	1500	K,M	"	"
M123A17BXD182KC	1800	K	"	"
M123A17BXD222-C	2200	K,M	"	"
M123A17BXD272KC	2700	K	"	"
M123A17BXD332-C	3300	K,M	"	"
M123A17BXD392KC	3900	K	"	"
M123A17BPD472-C	4700	K,M	"	"
M123A17BXD562KC	5600	K	"	"
M123A17BXD682-C	6800	K,M	"	"
M123A17BXD822KC	8200	K	"	"
M123A17BXD103-C	10000	K,M	"	"
M123A17BXC123KC	12000	K	"	100
M123A17BXC153-C	15000	K,M	"	"
M123A17BXC183KC	18000	K	"	"
M123A17BXC223-C	22000	K,M	"	"
M123A17BXC273KC	27000	K	"	"
M123A17BXC333-C	33000	K,M	"	"
M123A17BXC393KC	39000	K	"	"
M123A17BXC473-C	47000	K,M	"	"
M123A17BXC563KC	56000	K	"	"
M123A17BXC683-C	68000	K,M	"	"
M123A17BXC823KC	82000	K	"	"
M123A17BXC104-C	100000	K,M	"	"
M123A17BXB124KC	120000	K	"	50
M123A17BXB154-C	150000	K,M	"	"
M123A17BXB184KC	180000	K	"	"
M123A17BXB224-C	220000	K,M	"	"

1/ The complete part number shall include a symbol to indicate capacitance tolerance, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Molded plastic encapsulated.

Lead wire: Type C of MIL-C-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Voltage rating: See table I.

Pre-encapsulation terminal strength: In accordance with MIL-C-123.

Marking: In accordance with MIL-C-123, example 6.

CONCLUDING MATERIAL

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 85
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-1626-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:14Z
Check the source to verify that this is the current version before use.