INCH-POUND
MIL-PRF-123/18
21 November 1989

NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS24

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-123.

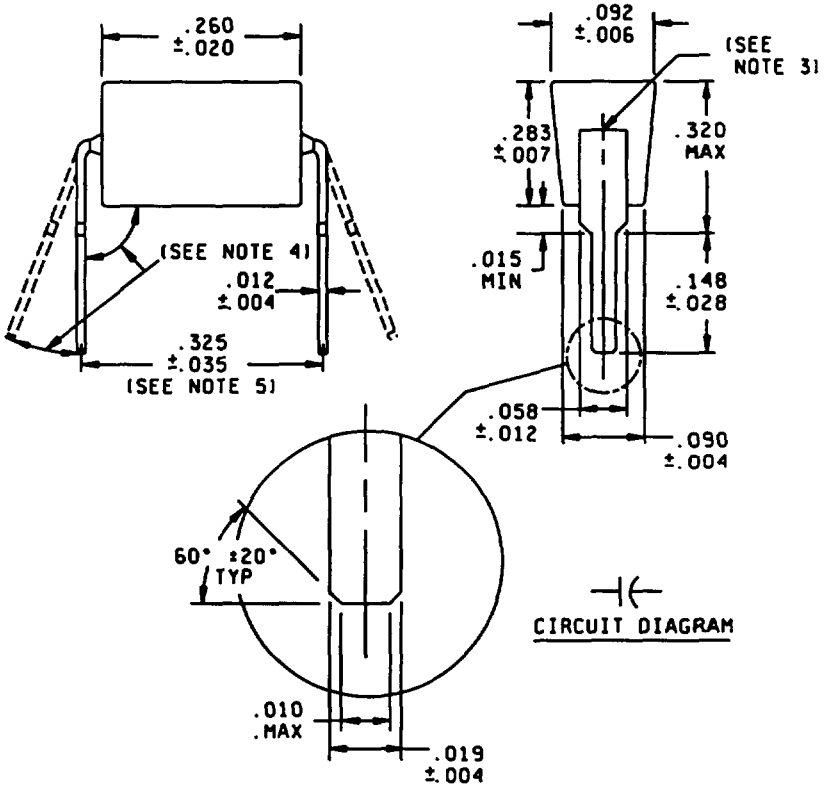


FIGURE 1. Style CKS24 capacitors.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:15Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.004	0.10	.035	0.89
.006	0.15	.058	1.47
.007	0.18	.090	2.29
.010	0.25	.092	2.34
.012	0.30	.148	3.76
.015	0.38	.260	6.60
.019	0.48	.283	7.19
.020	0.51	.320	8.13
.028	0.71	.325	8.26

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Leads shall be centered within ±.005 (0.13 mm).
4. The angle shall be 95° +10°, -5°.
5. The distance between the centers of the mounting holes will be .300 ±.010 inch (7.62 ±0.25 mm).
6. Nonconductive material shall not extend beyond .030 inch (0.76 mm) from the edge of the capacitor body.

FIGURE 1. Style CKS24 capacitors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:15Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS24 characteristics.

Part number 1/	Capacitance (pF)	Capacitance tolerance	Rated voltage (V dc)
M123A18BRC124KC	120000	K	100
M123A18BRC154-C	150000	K,M	100
M123A18BRB184KC	180000	K	50
M123A18BRB224-C	220000	K,M	"
M123A18BRB274KC	270000	K	"
M123A18BRB334-C	330000	K,M	"
M123A18BRB394KC	390000	K	"
M123A18BRB474-C	470000	K,M	"

1/ The complete part number shall include a symbol to indicate capacitance tolerance, as applicable.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Molded plastic encapsulated.

Lead wire: Type C of MIL-C-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Voltage-temperature limits: BR characteristic.

Voltage rating: See table I.

Pre-encapsulation terminal strength: In accordance with MIL-C-123.

Marking: In accordance with MIL-C-123, example 6.

CONCLUDING MATERIAL

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 85
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-1626-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:15Z
Check the source to verify that this is the current version before use.