INCH-POUND
MIL-PRF-123/18E
16 August 2024
SUPERSEDING
MIL-PRF-123/18D
30 June 2019

PERFORMANCE SPECIFICATION SHEET

CAPACITOR FIXED, CERAMIC DIELECTRIC (GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS24

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-123.

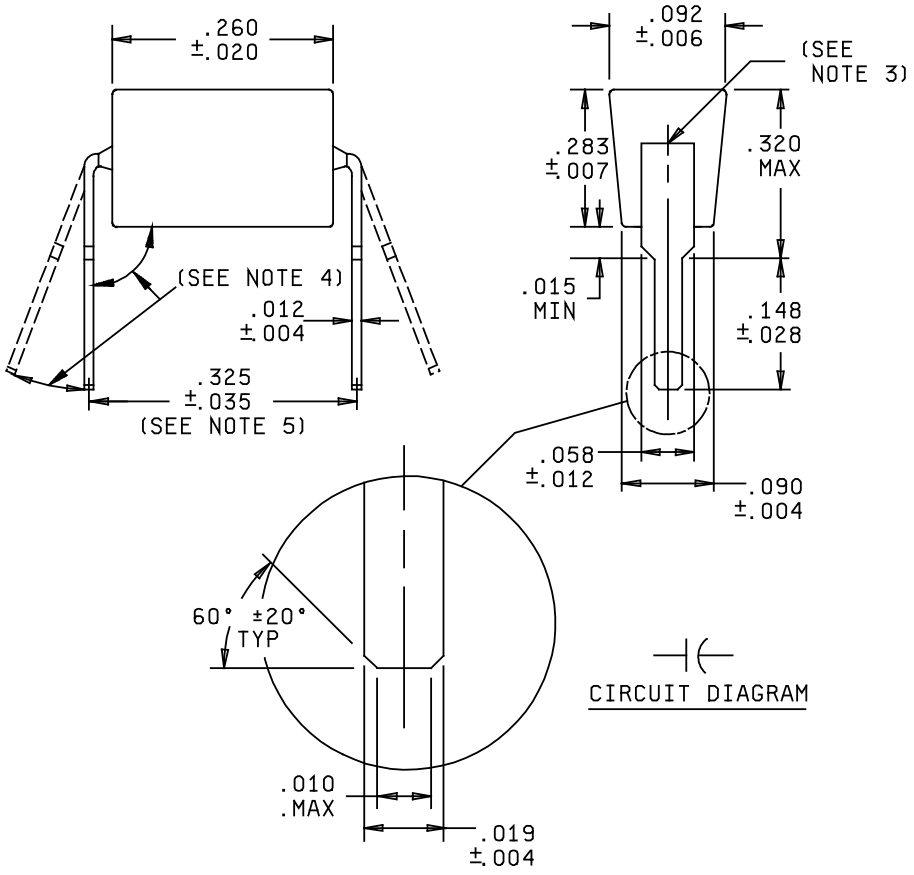


FIGURE 1. Style CKS24 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:14Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.004	0.10	.019	0.48	.092	2.34
.006	0.15	.020	0.51	.148	3.76
.007	0.18	.028	0.71	.260	6.60
.010	0.25	.035	0.89	.283	7.19
.012	0.30	.058	1.47	.320	8.13
.015	0.38	.090	2.29	.325	8.26

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for general information.
3. Leads shall be centered within ± .005 inch (0.13 mm).
4. The angle shall be 95° +10°, -5°.
5. The distance between the centers of the mounting holes will be .300 inch ± .010 inch (7.62 mm ± 0.25 mm).
6. Nonconductive material shall not extend beyond .030 inch (0.76 mm) from the edge of the capacitor body.

FIGURE 1. Style CKS24 capacitors - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Molded plastic, encapsulated.

Lead wire: Type C of MIL-PRF-123.

Capacitance value: See table I.

Capacitance tolerance: See table I (K = ± 10 percent; M = ± 20 percent).

Operating temperature: -55°C to +125°C.

Voltage-temperature limits: BR and BX in accordance with MIL-PRF-123.

Voltage rating: See table I.

Pre-encapsulation terminal strength: In accordance with MIL-PRF-123.

Marking: In accordance with MIL-PRF-123, example 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:14Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS24 characteristics.

Part or Identifying Number (PIN) 1/	Capacitance (pF)	Voltage-temperature limits	Capacitance tolerance	Rated voltage (V dc)
M123A18BRC124-C	120,000	BR	K, M	100
M123A18BRC154-C	150,000	BR	K, M	100
M123A18BRB184-C	180,000	BR	K, M	50
M123A18BRB224-C	220,000	BR	K, M	50
M123A18B-B274-C	270,000	BX, BR	K, M	50
M123A18B-B334-C	330,000	BX, BR	K, M	50
M123A18B-B394-C	390,000	BX, BR	K, M	50
M123A18B-B474-C	470,000	BX, BR	K, M	50
M123A18BXB564-C	560,000	BX	K, M	50
M123A18BXB684-C	680,000	BX	K, M	50
M123A18BXB824-C	820,000	BX	K, M	50
M123A18BXB105-C	1,000,000	BX	K, M	50

1/ The complete PIN will include additional letters to indicate voltage-temperature limits and capacitance tolerance, as applicable.

Changes from previous issue: The margins of this specification sheet are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Navy - EC
Air Force - 19
DLA - CC
Other - NA

Review activities:
Air Force – 85

Preparing activity:
DLA - CC

(Project 5910-2024-042)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:14Z
Check the source to verify that this is the current version before use.