INCH-POUND

MIL-PRF-123/21A
16 August 2005
SUPERSEDING
MIL-PRF-123/21
26 July 2005

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, NONLEADED, STYLE CKS55

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-123.

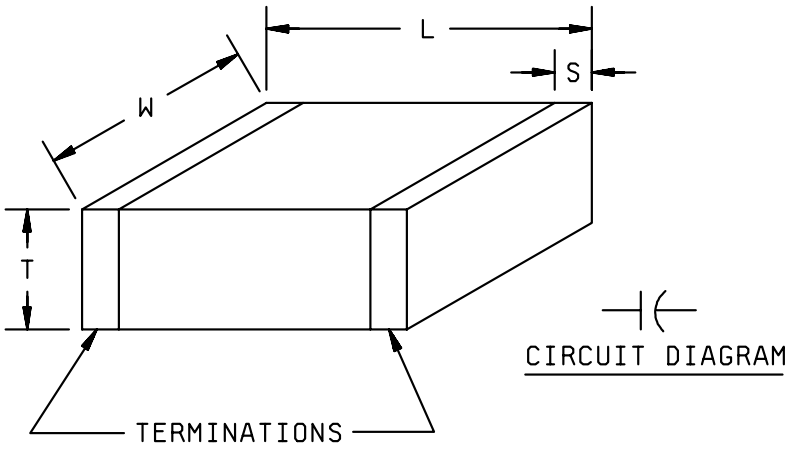

*

L ±.015	W ±.015	T		S ±.010
		Min	Max	
.120	.060	.020	.065	.020

Inches	mm
.008	0.20
.010	0.25
.020	0.51
.059	1.50
.063	1.60
.126	3.20

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions and tolerances are for bare chips. For solder coated terminations, add .025 inch (0.64 mm) to the positive length tolerance and .015 inch (0.38 mm) to the positive width and thickness tolerances.

* FIGURE 1. Style CKS55 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Multilayer, unencapsulated, monolithic ceramic.

Termination: In accordance with MIL-PRF-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Rated voltage: See table I.

Marking: In accordance with MIL-PRF-123.

TABLE I. Style CKS55 characteristics.

Part or Identifying Number (PIN) 1/	Capacitance pF	Capacitance tolerance	Rated temperature and voltage-temperature limits	Rated voltage V dc
M123A21BPC1R0B - -	1.0	B, C	BP	100
M123A21BPC1R1B - -	1.1	B, C	BP	100
M123A21BPC1R2B - -	1.2	B, C	BP	100
M123A21BPC1R3B - -	1.3	B, C	BP	100
M123A21BPC1R5B - -	1.5	B, C	BP	100
M123A21BPC1R6B - -	1.6	B, C	BP	100
M123A21BPC1R8B - -	1.8	B, C	BP	100
M123A21BPC2R0B - -	2.0	B, C	BP	100
M123A21BPC2R2B - -	2.2	B, C	BP	100
M123A21BPC2R4B - -	2.4	B, C	BP	100
M123A21BPC2R7B - -	2.7	B, C, D	BP	100
M123A21BPC3R0B - -	3.0	B, C, D	BP	100
M123A21BPC3R3B - -	3.3	B, C, D	BP	100
M123A21BPC3R6B - -	3.6	B, C, D	BP	100
M123A21BPC3R9B - -	3.9	B, C, D	BP	100
M123A21BPC4R3B - -	4.3	B, C, D	BP	100
M123A21BPC4R7B - -	4.7	B, C, D	BP	100
M123A21BPC5R1B - -	5.1	B, C, D	BP	100
M123A21BPC5R6B - -	5.6	B, C, D	BP	100
M123A21BPC6R2B - -	6.2	B, C, D	BP	100
M123A21BPC6R8B - -	6.8	B, C, D	BP	100
M123A21BPC7R5B - -	7.5	B, C, D	BP	100
M123A21BPC8R2B - -	8.2	B, C, D	BP	100
M123A21BPC9R1B - -	9.1	B, C, D	BP	100
M123A21BPC100B - -	10	F, J, K	BP	100
M123A21BPC110B - -	11	F, J, K	BP	100
M123A21BPC120B - -	12	F, J, K	BP	100
M123A21BPC130B - -	13	F, J, K	BP	100
M123A21BPC150B - -	15	F, J, K	BP	100
M123A21BPC160B - -	16	F, J, K	BP	100
M123A21BPC180B - -	18	F, J, K	BP	100
M123A21BPC200B - -	20	F, J, K	BP	100

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:15Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS55 characteristics - Continued.

PIN 1/	Capacitance pF	Capacitance tolerance	Rated temperature and voltage-temperature limits	Rated voltage V dc
M123A21BPC240B - -	24	F, J, K	BP	100
M123A21BPC270B - -	27	F, J, K	BP	100
M123A21BPC330B - -	33	F, J, K	BP	100
M123A21BPC360B - -	36	F, J, K	BP	100
M123A21BPC390B - -	39	F, J, K	BP	100
M123A21BPC430B - -	43	F, J, K	BP	100
M123A21BPC470B - -	47	F, J, K	BP	100
M123A21BPC510B - -	51	F, J, K	BP	100
M123A21BPC560B - -	56	F, J, K	BP	100
M123A21BPC620B - -	62	F, J, K	BP	100
M123A21BPC680B - -	68	F, J, K	BP	100
M123A21BPC750B - -	75	F, J, K	BP	100
M123A21BPC820B - -	82	F, J, K	BP	100
M123A21BPC910B - -	91	F, J, K	BP	100
M123A21BPC101B - -	100	F, J, K	BP	100
M123A21BPC111B - -	110	F, J, K	BP	100
M123A21BPC121B - -	120	F, J, K	BP	100
M123A21BPC131B - -	130	F, J, K	BP	100
M123A21BPC151B - -	150	F, J, K	BP	100
M123A21BPC161B - -	160	F, J, K	BP	100
M123A21BPC181B - -	180	F, J, K	BP	100
M123A21BPC201B - -	200	F, J, K	BP	100
M123A21BPC221B - -	220	F, J, K	BP	100
M123A21BPC241B - -	240	F, J, K	BP	100
M123A21BPC271B - -	270	F, J, K	BP	100
M123A21BPC301B - -	300	F, J, K	BP	100
M123A21BPC331B - -	330	F, J, K	BP	100
M123A21BPC361B - -	360	F, J, K	BP	100
M123A21BPC391B - -	390	F, J, K	BP	100
M123A21BPC431B - -	430	F, J, K	BP	100
M123A21BPC471B - -	470	F, J, K	BP	100
M123A21BPC511B - -	510	F, J, K	BP	100
M123A21BPC561B - -	560	F, J, K	BP	100
M123A21BPC621B - -	620	F, J, K	BP	100
M123A21BPC681B - -	680	F, J, K	BP	100
M123A21BPC751B - -	750	F, J, K	BP	100
M123A21BPC821B - -	820	F, J, K	BP	100
M123A21BPC911B - -	910	F, J, K	BP	100
M123A21BPC102B - -	1,000	F, J, K	BP	100
M123A21BPB112A - -	1,100	F, J, K	BP	50
M123A21BPC122A - -	1,200	F, J, K	BP	50
M123A21BPC132A - -	1,300	F, J, K	BP	50
M123A21BPC152A - -	1,500	F, J, K	BP	50
M123A21BPC162A - -	1,600	F, J, K	BP	50
M123A21BPB182A - -	1,800	F, J, K	BP	50
M123A21BPB202A - -	2,000	F, J, K	BP	50
M123A21BPB222A - -	2,200	F, J, K	BP	50
M123A21BXC472B - -	4,700	K, M	BX	100
M123A21BXC562B - -	5,600	K, M	BX	100
M123A21BXC682B - -	6,800	K, M	BX	100

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:15Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS55 characteristics - Continued.

PIN 1/	Capacitance pF	Capacitance tolerance	Rated temperature and voltage-temperature limits	Rated voltage V dc
M123A21BXC822B - -	8,200	K, M	BX	100
M123A21BXC103B - -	10,000	K, M	BX	100
M123A21BXC123B - -	12,000	K, M	BX	100
M123A21BXC153B - -	15,000	K, M	BX	100
M123A21BXB183A - -	18,000	K, M	BX	50
M123A21BXB223A - -	22,000	K, M	BX	50
M123A21BXB273A - -	27,000	K, M	BX	50
M123A21BXB333A - -	33,000	K, M	BX	50
M123A21BXB393A - -	39,000	K, M	BX	50

1/ The complete PIN will include additional letter(s) to indicate capacitance tolerance and termination, as applicable.

Changes from previous issue: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Navy - EC
Air Force - 19
DLA - CC
NASA - NA

Preparing activity:
DLA - CC

(Project 5910-2005-036)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:15Z
Check the source to verify that this is the current version before use.