INCH-POUND

MIL-PRF-123/22
26 July 2005

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC,
(TEMPERATURE STABLE AND GENERAL PURPOSE),
HIGH RELIABILITY, NONLEADED, STYLE CKS56

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-123.

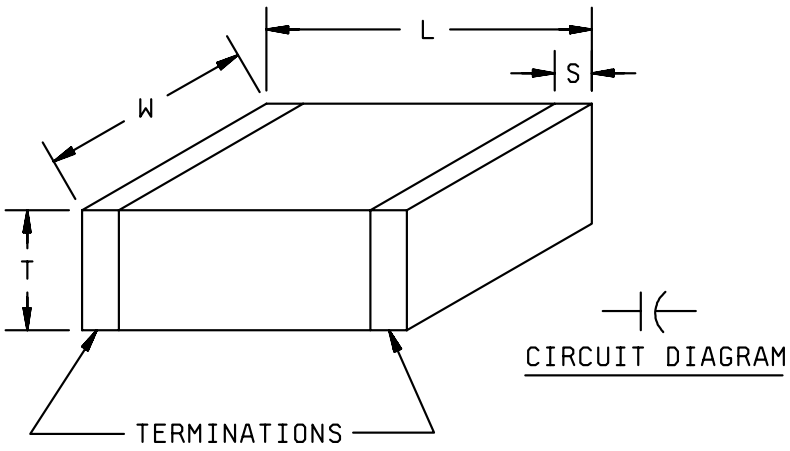

L ±.015	W ±.015	T		S ±.010
		Min	Max	
.180	.125	.022	.080	.020

Inches	mm
.010	0.25
.015	0.38
.020	0.51
.022	0.56
.080	2.03
.125	3.18
.180	4.57

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions and tolerances are for bare chips. For solder coated terminations, add .025 inch (0.64 mm) to the positive length tolerance and .015 inch (0.38 mm) to the positive width and thickness tolerances.

FIGURE 1. Style CKS56 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Multilayer, unencapsulated, monolithic ceramic.

Termination: In accordance with MIL-PRF-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Rated voltage: See table I.

Marking: In accordance with MIL-PRF-123.

TABLE I. Style CKS56 characteristics.

Part or Identifying Number (PIN) 1/	Capacitance pF	Capacitance tolerance	Rated temperature and voltage-temperature limits	Rated voltage V dc
M123A22BPC122B - -	1,200	F, J, K	BP	100
M123A22BPB222B - -	2,200	F, J, K	BP	100
M123A22BP242B - -	2,400	F, J, K	BP	100
M123A22BP272B - -	2,700	F, J, K	BP	100
M123A22BP302B - -	3,000	F, J, K	BP	100
M123A22BP332B - -	3,300	F, J, K	BP	100
M123A22BP362B - -	3,600	F, J, K	BP	100
M123A22BP392B - -	3,900	F, J, K	BP	100
M123A22BP432B - -	4,300	F, J, K	BP	100
M123A22BP472B - -	4,700	F, J, K	BP	100
M123A22BP512A - -	5,100	F, J, K	BP	50
M123A22BP562A - -	5,600	F, J, K	BP	50
M123A22BP622A - -	6,200	F, J, K	BP	50
M123A22BP682A - -	6,800	F, J, K	BP	50
M123A22BP752A - -	7,500	F, J, K	BP	50
M123A22BP822A - -	8,200	F, J, K	BP	50
M123A22BP912A - -	9,100	F, J, K	BP	50
M123A22BP103A - -	10,000	F, J, K	BP	50
M123A22BX273B - -	27,000	K, M	BX	100
M123A22BX333B - -	33,000	K, M	BX	100
M123A22BX393B - -	39,000	K, M	BX	100
M123A22BX473B - -	47,000	K, M	BX	100
M123A22BX563B - -	56,000	K, M	BX	100
M123A22BX104A - -	100,000	K, M	BX	50
M123A22BX124A - -	120,000	K, M	BX	50
M123A22BX154A - -	150,000	K, M	BX	50
M123A22BX184A - -	180,000	K, M	BX	50

1/ The complete PIN will include additional letter(s) to indicate capacitance tolerance and termination, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:16Z
Check the source to verify that this is the current version before use.

Custodians:
Navy - EC
Air Force - 19
DLA - CC
NASA - NA

Preparing activity:
DLA - CC

(Project 5910-2005-008)

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:16Z
Check the source to verify that this is the current version before use.