INCH-POUND

MIL-PRF-123/23
26 July 2005

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC,
(TEMPERATURE STABLE AND GENERAL PURPOSE),
HIGH RELIABILITY, NONLEADED, STYLE CKS57

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-123.

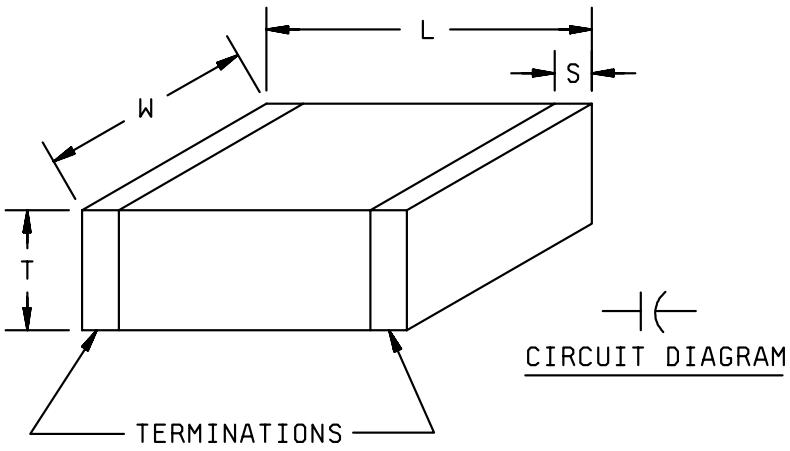

L ±.015	W ±.015	T		S ±.010
		Min	Max	
.180	.250	.020	.080	.020

Inches	mm
.010	0.25
.015	0.38
.020	0.51
.080	2.03
.180	4.57
.250	6.35

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions and tolerances are for bare chips. For solder coated terminations, add .025 inch (0.64 mm) to the positive length tolerance and .015 inch (0.38 mm) to the positive width and thickness tolerances.

FIGURE 1. Style CKS57 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Multilayer, unencapsulated, monolithic ceramic.

Termination: In accordance with MIL-PRF-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Rated voltage: See table I.

Marking: In accordance with MIL-PRF-123.

TABLE I. Style CKS57 characteristics.

Part or Identifying Number (PIN) 1/	Capacitance pF	Capacitance tolerance	Rated temperature and voltage-temperature limits	Rated voltage V dc
M123A23BPC472B - -	4,700	F, J, K	BP	100
M123A23BPC512B - -	5,100	F, J, K	BP	100
M123A23BPC562B - -	5,600	F, J, K	BP	100
M123A23BPC622B - -	6,200	F, J, K	BP	100
M123A23BPC682B - -	6,800	F, J, K	BP	100
M123A23BPC752B - -	7,500	F, J, K	BP	100
M123A23BPC822B - -	8,200	F, J, K	BP	100
M123A23BPC912B - -	9,100	F, J, K	BP	100
M123A23BPC103B - -	10,000	F, J, K	BP	100
M123A23BPB113A - -	11,000	F, J, K	BP	50
M123A23BPB123A - -	12,000	F, J, K	BP	50
M123A23BPB133A - -	13,000	F, J, K	BP	50
M123A23BPB153A - -	15,000	F, J, K	BP	50
M123A23BPB163A - -	16,000	F, J, K	BP	50
M123A23BPB183A - -	18,000	F, J, K	BP	50
M123A23BPB203A - -	20,000	F, J, K	BP	50
M123A23BPB223A - -	22,000	F, J, K	BP	50
M123A23BXC563B - -	56,000	K, M	BX	100
M123A23BXC683B - -	68,000	K, M	BX	100
M123A23BXC823B - -	82,000	K, M	BX	100
M123A23BXC104B - -	100,000	K, M	BX	100
M123A23BXC124B - -	120,000	K, M	BX	100
M123A23BXC154B - -	150,000	K, M	BX	100
M123A23BXB184A - -	180,000	K, M	BX	50
M123A23BXB224A - -	220,000	K, M	BX	50
M123A23BXB274A - -	270,000	K, M	BX	50
M123A23BXB334A - -	330,000	K, M	BX	50
M123A23BXB394A - -	390,000	K, M	BX	50
M123A23BXB474A - -	470,000	K, M	BX	50

1/ The complete PIN will include additional letter(s) to indicate capacitance tolerance and termination, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:16Z
Check the source to verify that this is the current version before use.

Custodians:
Navy - EC
Air Force - 19
DLA - CC
NASA - NA

Preparing activity:
DLA - CC

(Project 5910-2005-009)

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:16Z
Check the source to verify that this is the current version before use.