MIL-C-28754/10C
13 December 1982
SUPRSEDING
MIL-C-0028754/10B(EC)
15 June 1981
MIL-C-28754/10A
30 April 1979

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE IV, 40 PIN, CONTACT TAILS ON 0.050 CENTERS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28754.

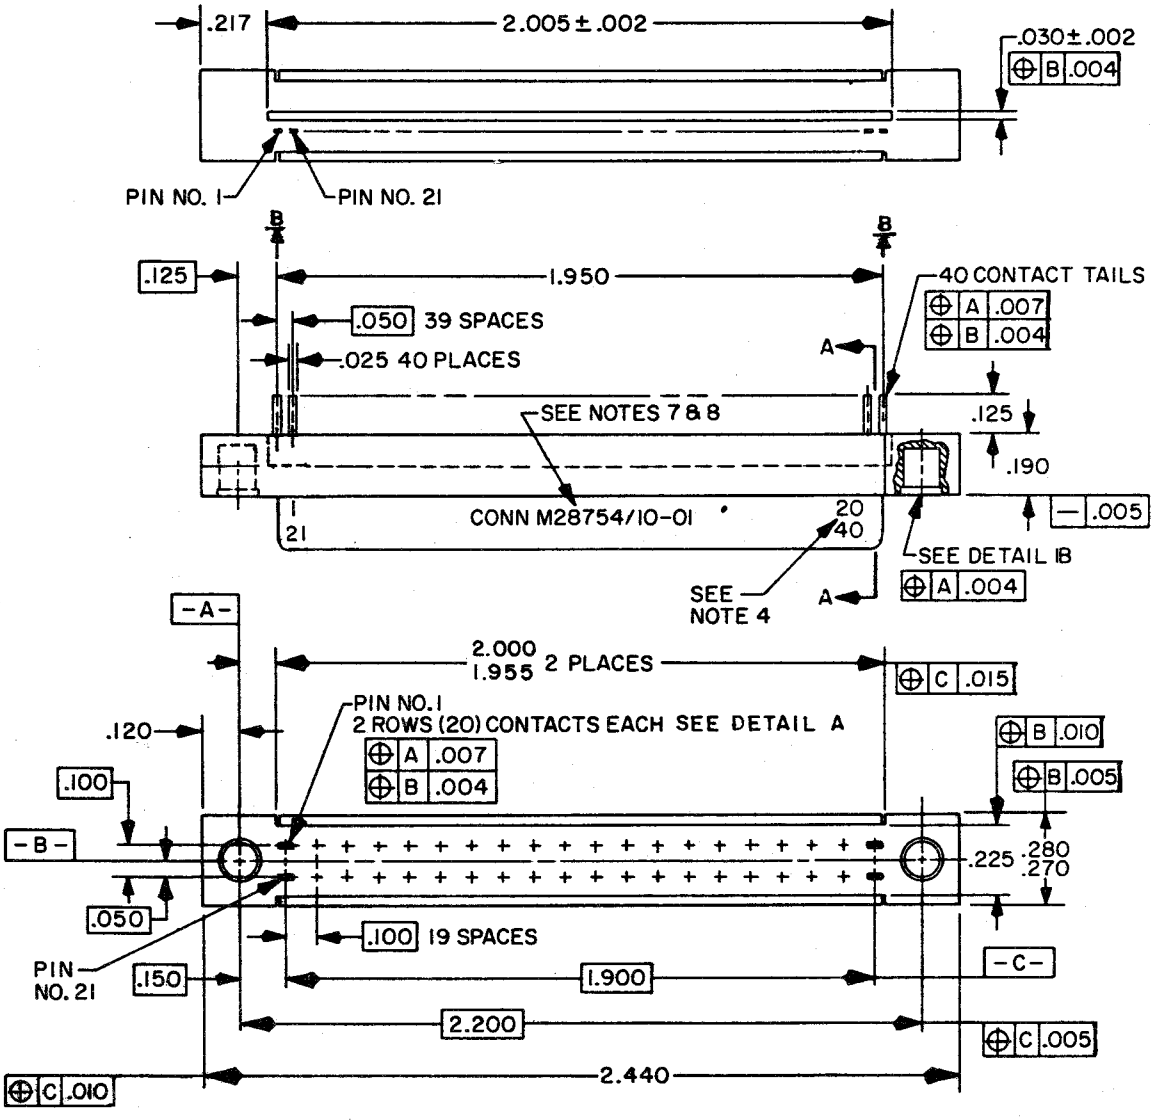


FIGURE 1. Dimensions and configurations (-01 and -03).

© denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

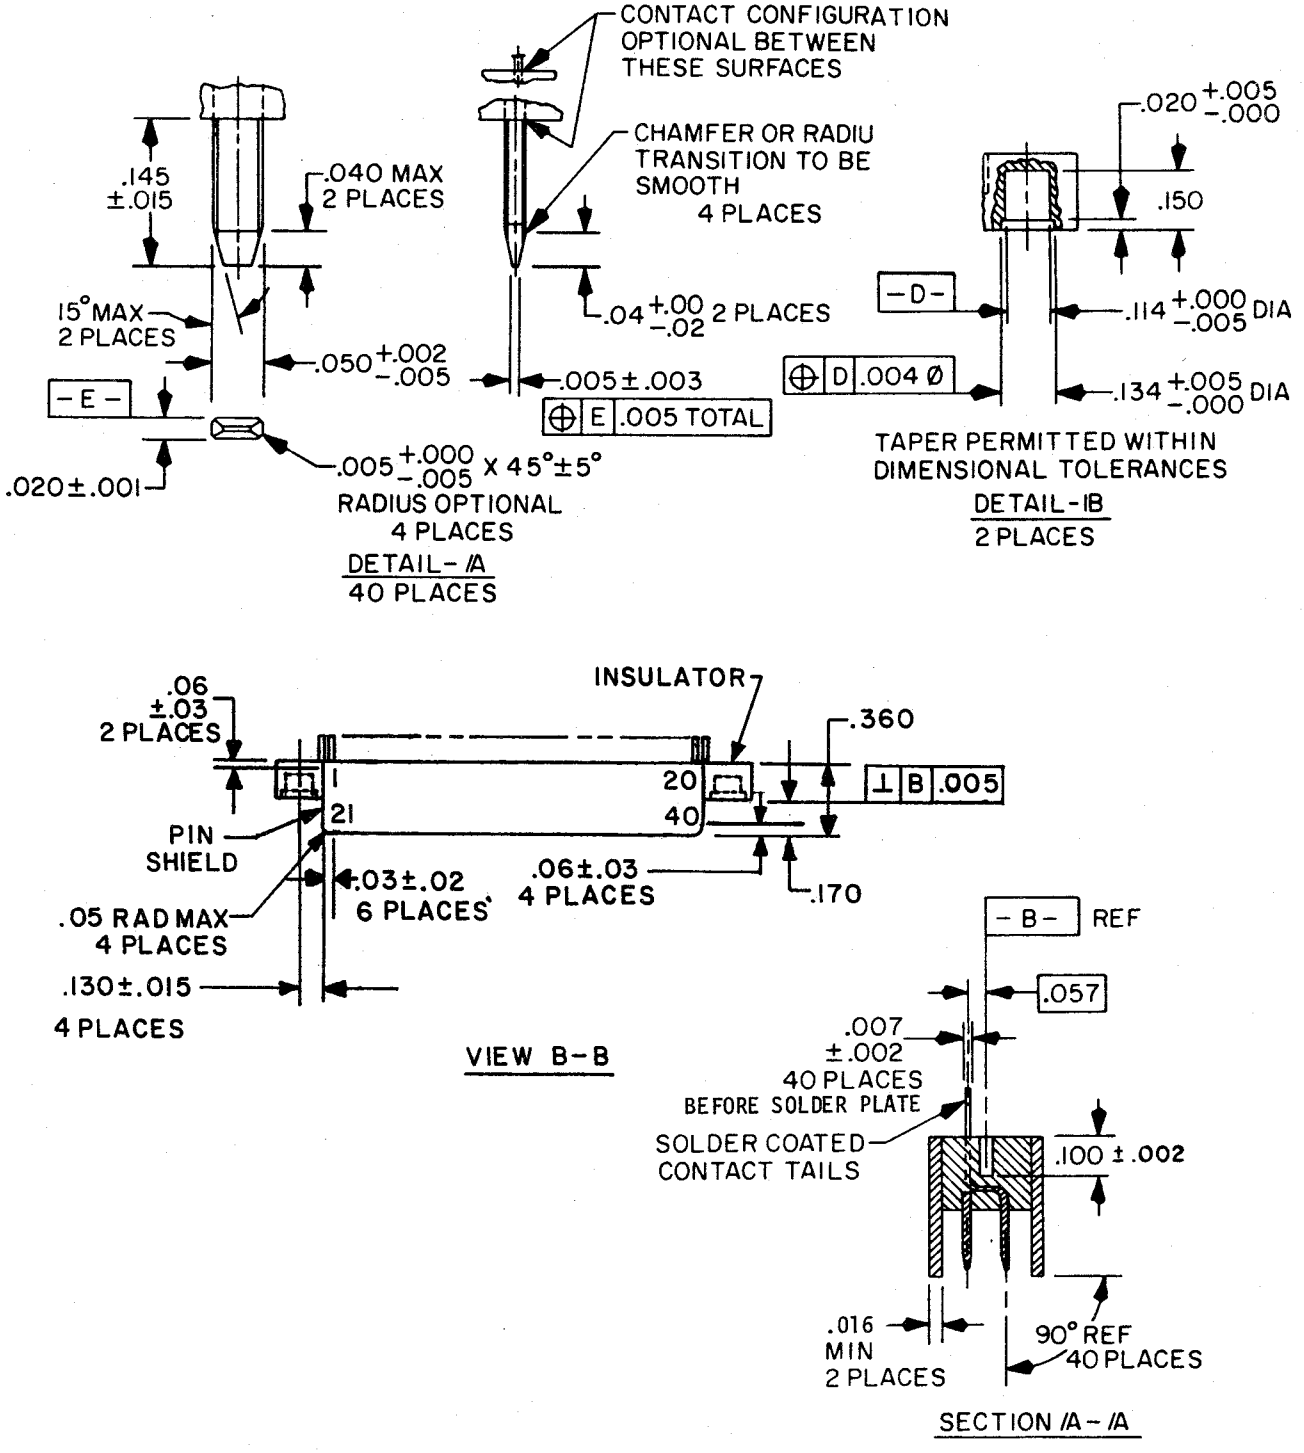


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T14:33Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
.000	.00	.050	1.27	.225	5.72
.001	.03	.057	1.45	.270	6.86
.002	.05	.06	1.5	.275	6.98
.003	.08	.060	1.52	.280	7.11
.004	.10	.100	2.54	.285	7.24
.005	.13	.114	2.90	.360	9.14
.007	.18	.120	3.05	1.900	48.26
.010	.25	.125	3.18	1.94	49.3
.01	.3	.134	3.40	1.950	49.53
.015	.38	.145	3.68	1.960	49.78
.020	.51	.150	3.81	2.005	50.93
.025	.64	.170	4.32	2.200	55.88
.030	.76	.190	4.83	2.440	61.98
.040	1.02	.217	5.51		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.
4. Contact numbers 1, 20, 21, and 40 shall be marked on pin shield in color contrasting characters .06 inch high.
5. The line referred to as -B- designates a plane passing through the axis of the two (2) .114 $^{+.000}_{-.005}$ inch diameter keying pin holes.
6. Flash around blade contacts not to exceed .010 inch from the surface of the insulator and shall be firmly attached.
7. Marking this area in color contrasting characters, .06 inch high.
8. The letters CONN are to be marked in color contrasting characters, .06 inch high and are to proceed the military part number but are not to be included in the part number.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T14:33Z
Check the source to verify that this is the current version before use.

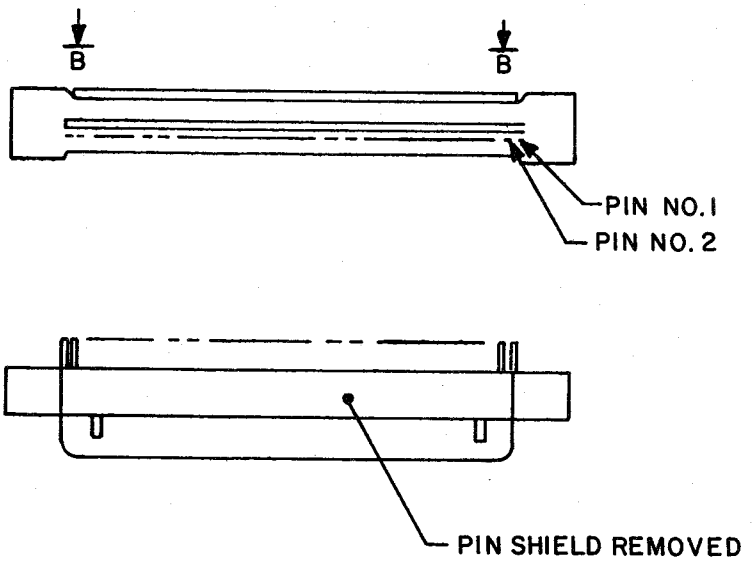


FIGURE 2. Dimensions and configurations (-02 and -04).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Contacts: See figure 1. Pins shall be brass, half hard, alloy 260, per QQ-B-613.

© Plating: Contact plating shall be per MIL-C-28754. Solder coated contact tails shall be tinned (see detail AA) with solder to a thickness of 0.0005 inch to 0.003 inch and solder shall cover tails. Solder used shall be in accordance with QQ-S-571, type Sn60, form B, type S. A noncorrosive flux may be used per MIL-F-14256, type RMA.

© Pin shields:

Dash numbers 01 and 02: Aluminum alloy 5052, H34, in accordance with QQ-A-250/8. Anodized black in accordance with MIL-A-8625, type II, class 2.

Dash numbers 03 and 04 (insulated): Aluminum alloy 5052, H34, in accordance with QQ-A-250/8. Anodized black in accordance with MIL-A-8625, type III, class 2.

Alternate material: Unclad epoxy glass laminate in accordance with MIL-P-13949, type GF.

Contact resistance: Voltage drop shall not exceed 20 millivolts.

Solderability: In accordance with MIL-C-28754.

Current rating: 3 amperes.

Temperature rating: -55°C to +105°C.

Voltage rating: 300 volts, ac (rms) at sea level.

Durability: Voltage drop shall not exceed 20 millivolts.

Marking: In accordance with MIL-C-28754, table I and figure 1.

Military part number: M28754/10- (dash number from table I).

Supersession data: This specification includes the requirements of drawing number 0102-663, code identification number 28687.

© TABLE I. Dash numbers and design characteristics.

Dash no.	Characteristics	Applicable connector assembly
01 1/	Two pin shields	M28754/7-03
02 1/	One pin shield	M28754/48-01
03	Two pin shields	M28754/7-05
04	One pin shield	M28754/48-02

1/ -01 and -02 Inactive for new design use -03 and -04.

CAUTION: The supersession information is valid as of the date of this revision. The QPL associated with this inactive for new design note will be maintained until acquisition of the product is no longer required.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T14:33Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3266-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.