MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, 40 PIN, RIGHT ANGLE (FOR SOLID OR DIP FRAME)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28754.

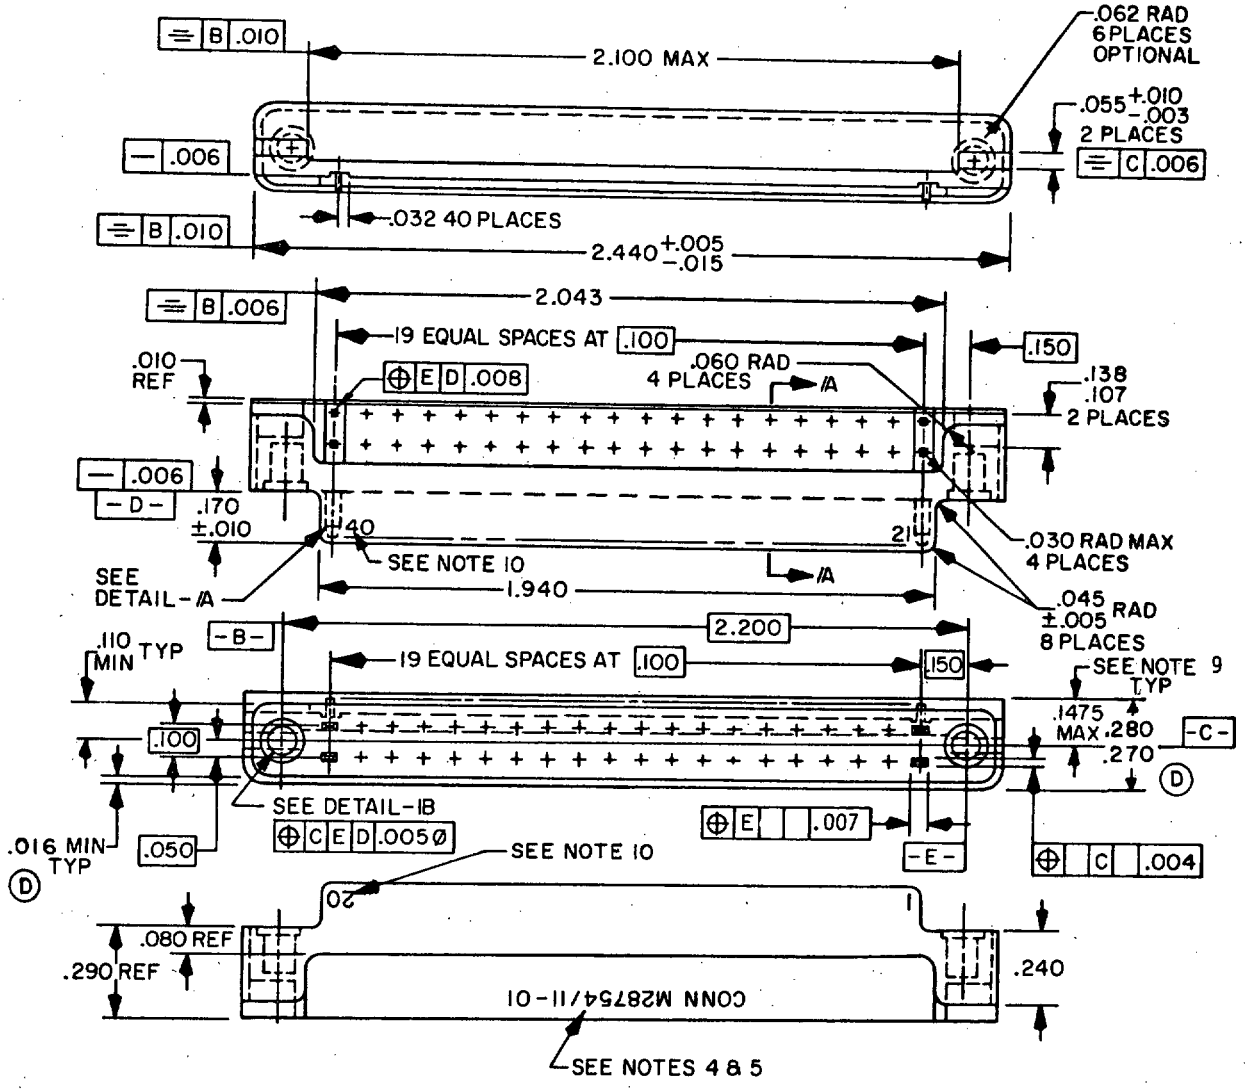


FIGURE 1. Dimensions and configurations.

Ⓓ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

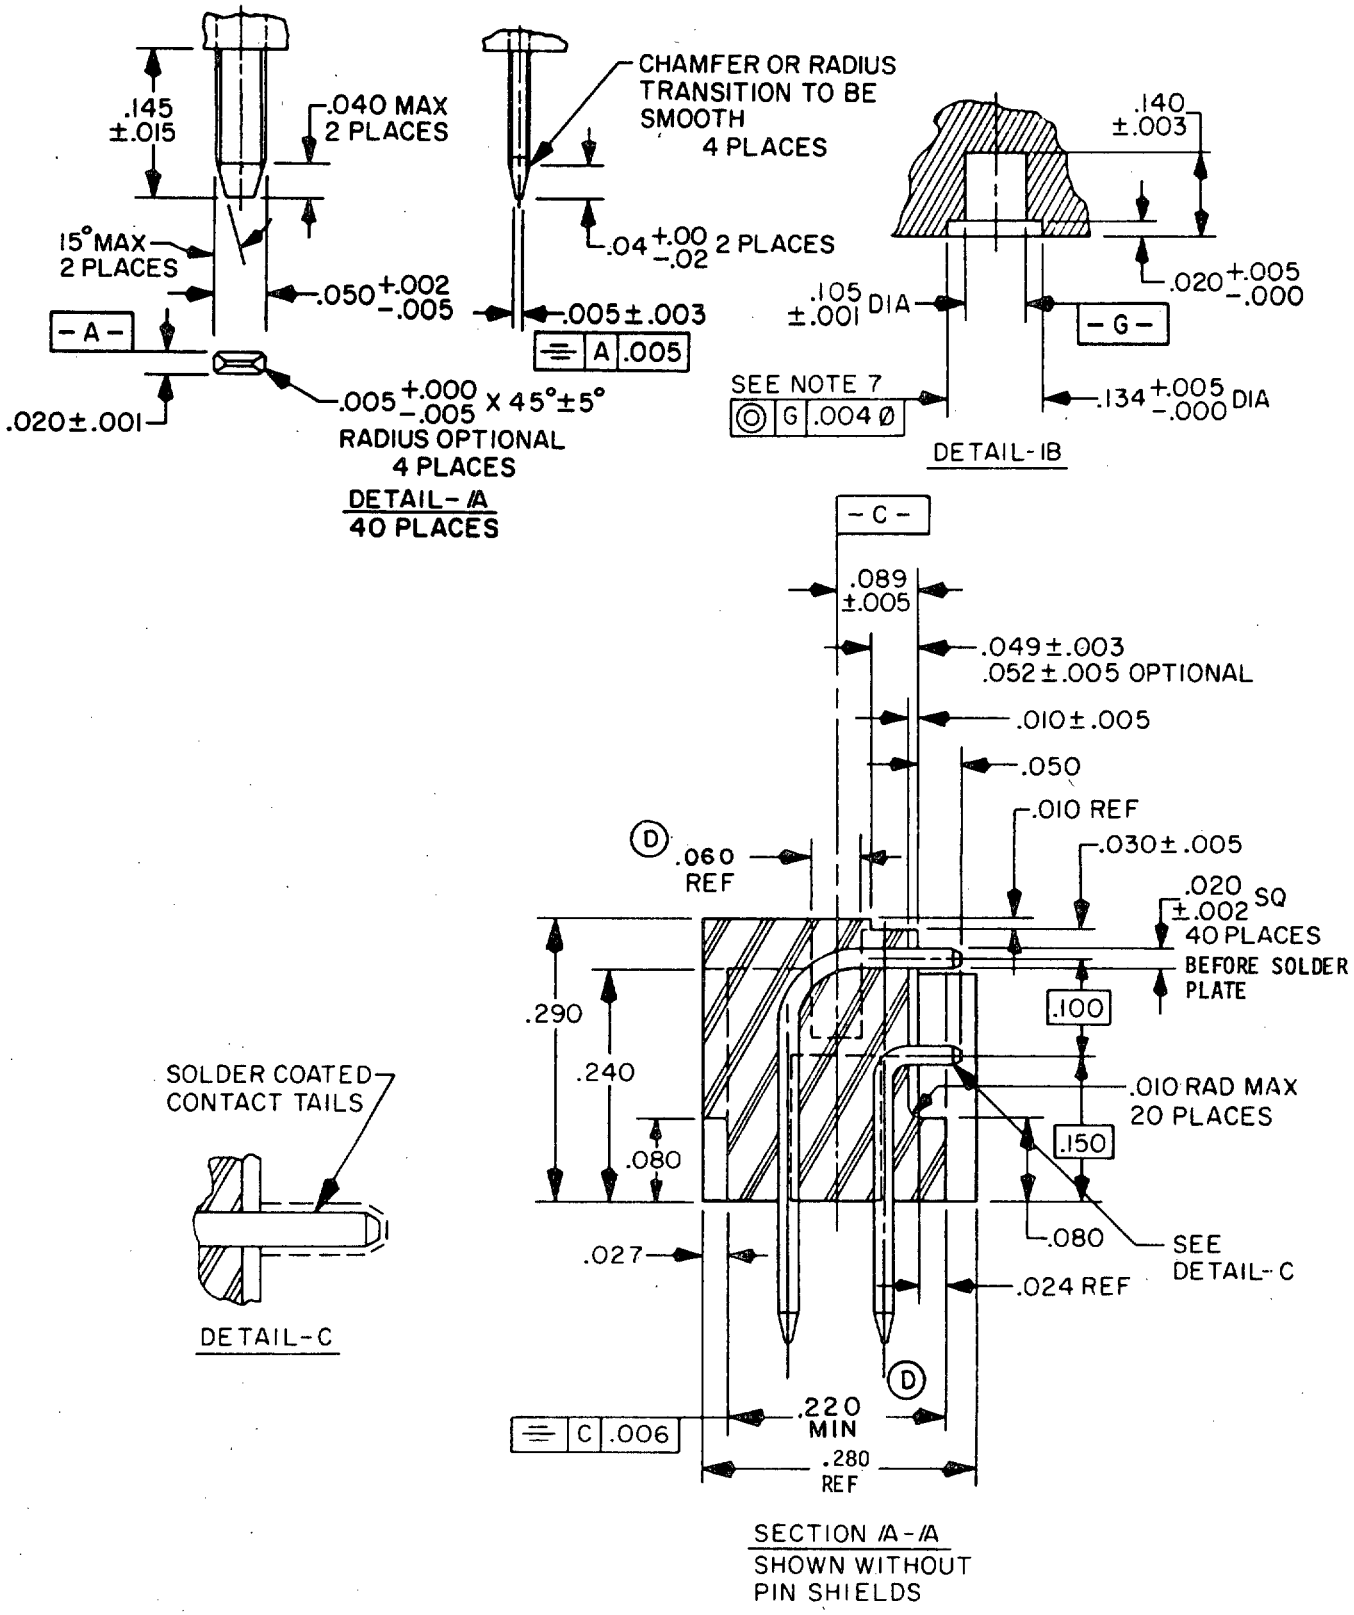


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.027	.69	.080	2.03	.170	4.32
.002	.05	.030	.76	.089	2.26	.220	5.59
.003	.08	.032	.81	.100	2.54	.230	5.84
.004	.10	.040	1.02	.105	2.67	.240	6.10
.005	.13	.045	1.14	.107	2.72	.270	6.86
.006	.15	.049	1.24	.110	2.79	.280	7.11
.008	.20	.050	1.27	.134	3.40	.290	7.37
.010	.25	.052	1.32	.138	3.51	1.940	49.28
.01	.3	.055	1.40	.140	3.56	2.043	51.89
.015	.38	.06	1.5	.145	3.68	2.100	53.34
.020	.51	.060	1.52	.1475	3.746	2.200	55.88
.024	.61	.062	1.57	.150	3.81	2.440	61.98

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 on three place decimals and ±.01 on two place decimals.
4. Marking this area in color contrasting characters, .06 inch high.
5. The letters CONN are to be marked in color contrasting characters, .06 inch high and are to proceed the military part number but are not to be included in the part number.
6. Flash around blade contacts not to exceed .010 from the body and shall be firmly attached.
7. Taper permitted within dimensional tolerances.
8. Datum C is established by a plane passing thru the center of the keying pin holes located by the 2.200 dimension.
9. The .1475 maximum indicates the maximum eccentricity allowed on either side of Datum "C" but not both.
10. Contact numbers 1, 20, 21, and 40 shall be marked on pin shield in color contrasting characters, .06 inch high.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Insulator: Diallyl phthalate, MIL-M-14, type SDG-F.

Contacts: See figure 1. Pins shall be brass, half hard, alloy 260, per QQ-B-613.

Ⓓ Plating: Contact plating shall be per MIL-C-28754. Solder coated contact tails shall be tinned (see detail C) with solder to a thickness of 0.0005 inch to 0.003 inch and solder shall cover tails. Solder used shall be in accordance with QQ-S-571, type Sn60, form B, type S. A noncorrosive flux may be used per MIL-F-14256, type RMA.

Ⓓ Pin shields:

Dash number 01: Aluminum alloy 5052, H38, H32, H34, in accordance with QQ-A-250/8. Anodized black in accordance with MIL-A-8625, type II, class 2.

Dash number 02 (insulated): Aluminum alloy 5052, H38, H32, H34, in accordance with QQ-A-250/8. Anodized black in accordance with MIL-A-8625, type III, class 2.

Alternate material: Unclad epoxy glass laminate in accordance with MIL-P-13949, type GF.

Contact resistance: Voltage drop shall not exceed 20 millivolts.

Current rating: 3 amperes.

Temperature rating: -55°C to +105°C.

Voltage rating: 300 volts, ac (rms) at sea level.

Durability: Voltage drop shall not exceed 20 millivolts.

Marking: In accordance with MIL-C-28754, table I and figure 1.

Military part number: M28754/11- (dash number from table I).

TABLE I. Dash numbers and applicable connector assembly.

Dash no.	Applicable connector assembly
01 1/	M28754/12-01, M28754/12-02, M28754/9-01
02	M28754/12-03, M28754/12-04, M28754/12-05 M28754/9-02

1/ Inactive for new design use -02.

CAUTION: The supersession information is valid as of the date of this revision. The QPL associated with this inactive for new design note will be maintained until acquisition of the product is no longer required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3266-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.