MIL-C-28754/11E
1 October 1990
SUPERSEDING
MIL-C-28754/11D
13 DECEMBER 1982

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, 40 CONTACT, RIGHT ANGLE (FOR SOLID OR DIP FRAME)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

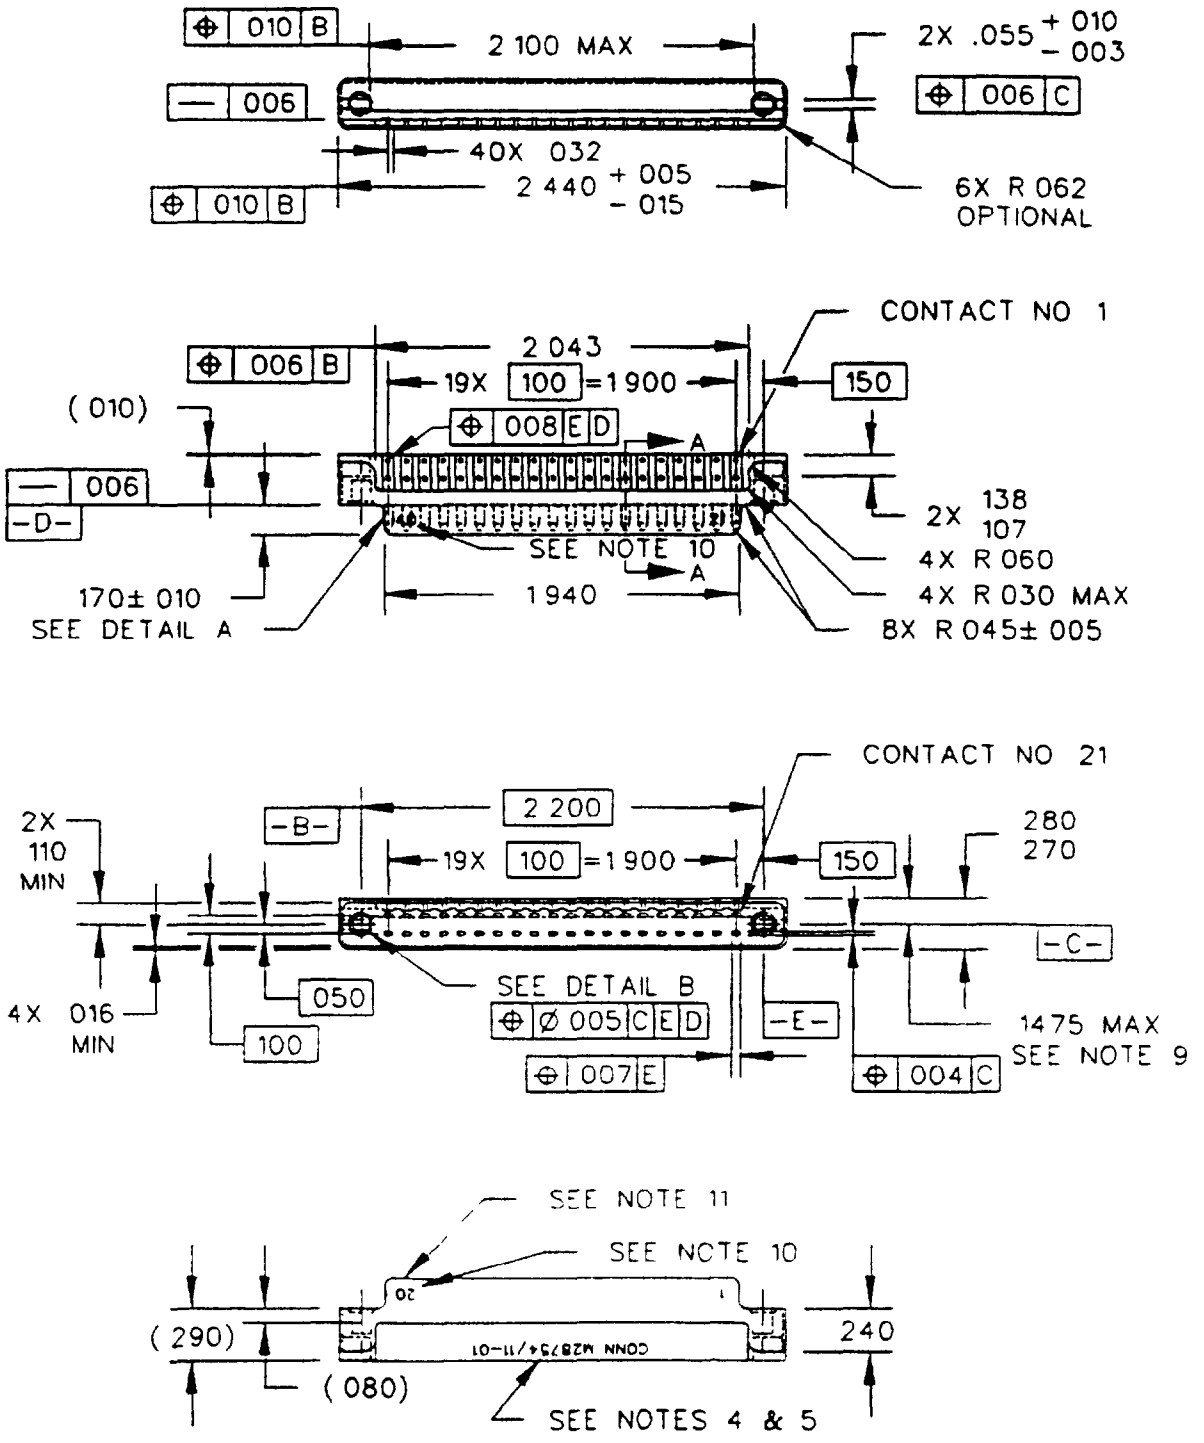


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

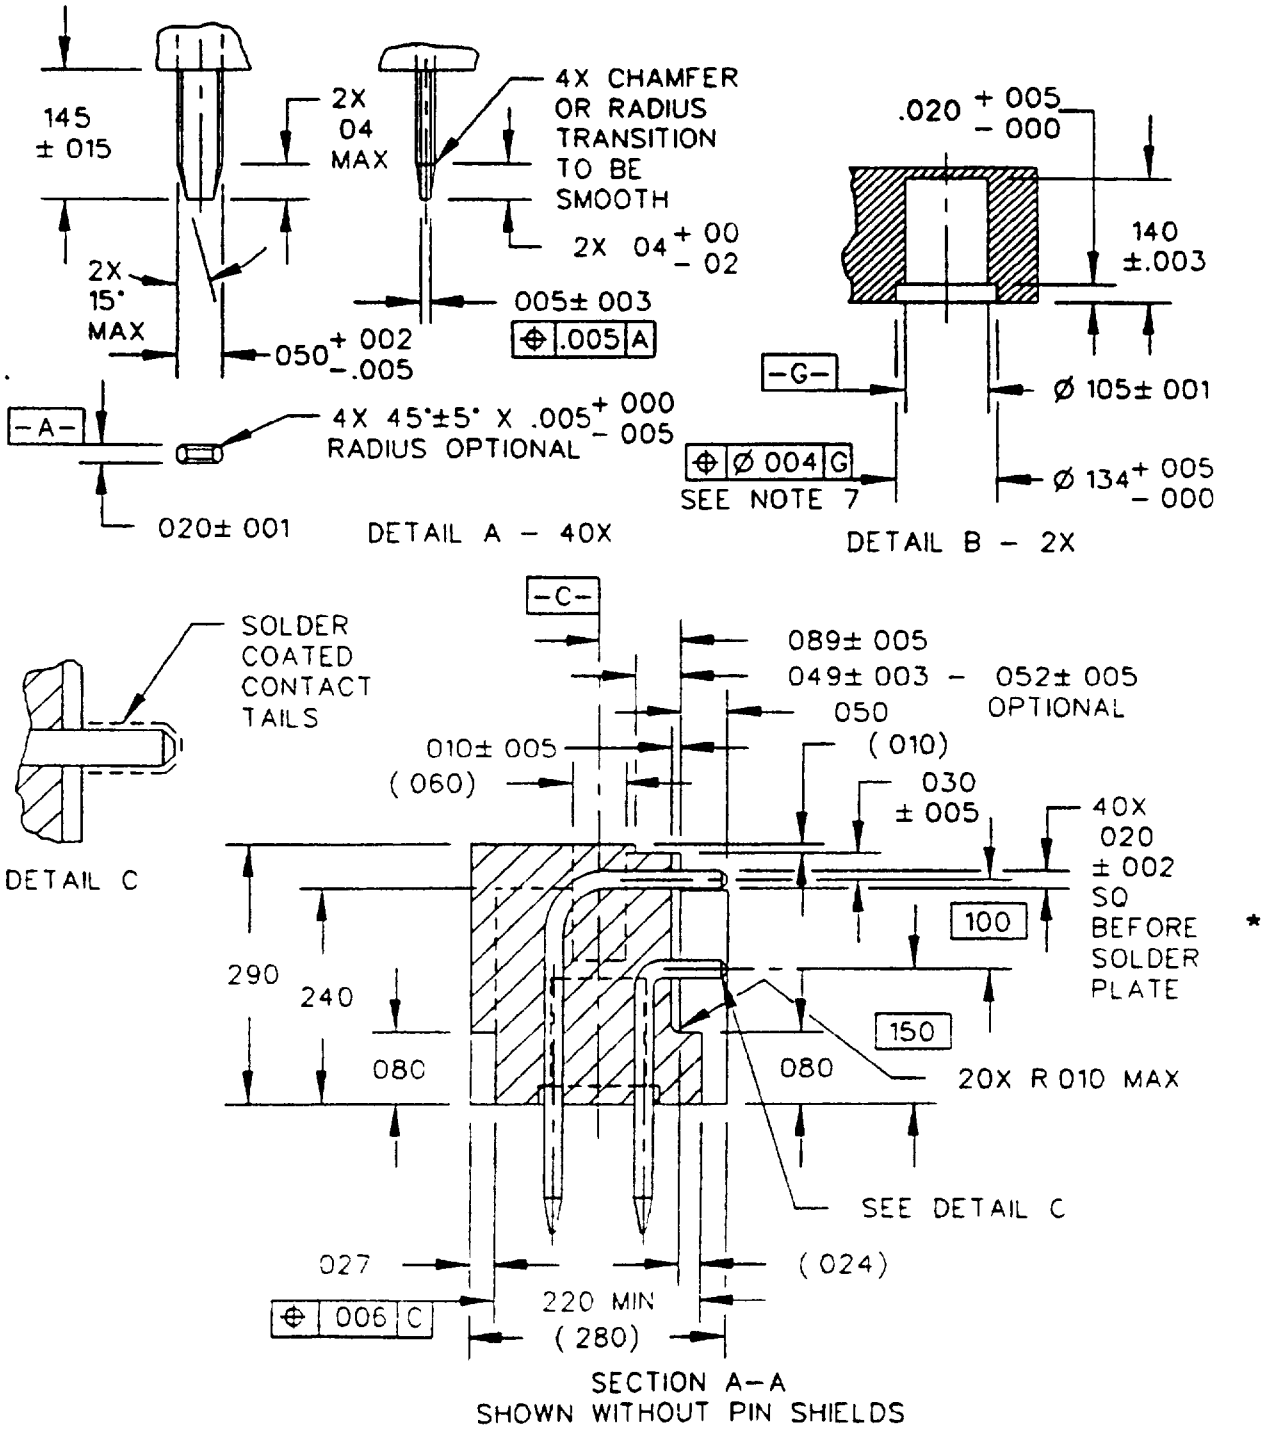


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
0.001	0.025	0.030	0.762	0.100	2.540	0.240	6.096
0.002	0.051	0.032	0.813	0.105	2.667	0.270	6.858
0.003	0.076	0.040	1.016	0.107	2.718	0.280	7.112
0.004	0.102	0.045	1.143	0.110	2.794	0.290	7.366
0.005	0.129	0.049	1.245	0.134	3.404	1.940	49.276
0.006	0.152	0.050	1.270	0.138	3.505	2.043	51.892
0.008	0.203	0.052	1.321	0.140	3.556	2.100	53.340
0.010	0.254	0.055	1.397	0.145	3.683	2.200	55.880
0.01	0.25	0.06	1.52	0.1475	3.7465	2.440	61.976
0.015	0.381	0.060	1.524	0.150	3.810		
0.020	0.508	0.062	1.575	0.170	4.318		
0.024	0.610	0.080	2.032	0.220	5.588		
0.027	0.686	0.089	2.261	0.230	5.842		

NOTES:

1. Dimensions are in inches.

2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.

3. Unless otherwise specified, tolerances are plus or minus 0.005 inch (0.125 mm) on three place decimals, plus or minus 0.01 inch (0.25 mm) on two place decimals and plus or minus 2° on angles.

4. Marking in this area shall be in color contrasting characters, 0.06 inch (1.52 mm) high.

5. The letters CONN are to be marked in color contrasting characters, 0.060 inch (1.52 mm) high and are to precede the military part number, but are not to be included in the part number.

6. The flash around the blade contacts is not to exceed 0.010 inch (0.254 mm) from the body and shall be firmly attached.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

7. Taper permitted within dimensional tolerances. For dash 03, the key pin hole is 0.095 plus or minus 0.001 inch (2.41 plus or minus 0.003 mm) diameter x 0.150 inch (3.81 mm) deep. *

8. Datum [-C-] is established by a plane passing thru the center of the keying pin holes located by the 2.200 dimension.

9. The 0.1475 maximum indicates the maximum eccentricity allowed on either side of Datum [-C-] but not both.

10. Contact numbers 1, 20, 21, and 40 shall be marked on the pin shield in color contrasting characters, 0.06 inch high.

11. For aluminum alloy, break all sharp corners and edges 0.004 plus or minus 0.001 R. *

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Insulator: Diallyl phthalate, MIL-M-14, type SDG-F.

Contacts: See figure 1. Contacts shall be brass, half hard, alloy 260, per QQ-B-613.

Plating: Contact plating shall be per MIL-C-28754. Solder coated contact tails shall be tinned (see detail C) with solder to a thickness of 0.0005 inch (0.013 mm) to 0.003 inch (0.08 mm) and solder shall cover tails. Solder used shall be in accordance with QQ-S-571, type Sn60, form B, type S. A noncorrosive flux may be used per MIL-F-14256, type RMA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

Pin shields:

Dash number 01: Aluminum alloy 5052, H38, H32, H34, in accordance with QQ-A-250/8. Anodized black in accordance with MIL-A-8625, type II, class 2.

Dash number 02 (insulated): Aluminum alloy 5052, H38, H32, H34, in accordance with QQ-A-250/8. Anodized black in accordance with MIL-A-8625, type III, class 2. Racking points shall be allowed and located at the manufacturer's option. The anodize shall not be required to be continuous at these points. *

Dash number 03 (insulated): Ultem shell, polyetherimide, type GLT-20F or 30F, molded thermoplastic, in accordance with MIL-M-24519 with diallyl phthalate body. *

Alternate material: Unclad epoxy glass laminate in accordance with MIL-P-13949, type GF.

Contact resistance: Voltage drop shall not exceed 20 millivolts.

Current rating: 3 amperes.

Solderability: In accordance with MIL-C-28754.

Temperature rating: Minus 55 to plus 105°C.

Voltage rating: 300 volts, ac (rms) at sea level.

Durability: Voltage drop shall not exceed 20 millivolts.

Marking: In accordance with MIL-C-28754, table I, and figure 1

Military part number: M28754/11- (dash number from table I).

Caution: The supersession information is valid as of the date of this revision. The QPL associated with this inactive for new design item will be maintained until acquisition of the product is no longer required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and applicable connector assembly.

Dash no	Applicable connector assembly
01 1/	M28754/12-01, M28754/12-02, M28754/9-01
02	M28754/09-02, M28754/12-03 through /12-05, M28754/78-01 through /78-10 *
03	M28754/09-04, M28754/12-06 through /12-08, M28754/78-11 through /78-20 *

NOTE:
1/ Inactive for new design; use -02.

Caution: The GLT-20F or GLT-30F may be susceptible to stress cracking when exposed to certain cleaning solvents. *

Qualifications testing: Perform the applicable tests as specified in MIL-C-28754 and the appendix thereto.

Extended qualifications: Qualification of M28754/11-01 and /11-02 extends qualifications to other products as specified in the appendix to MIL-C-28754.

Changes from previous issue: The margins of this specification sheet are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS

Agent:
NW

Preparing activity:
Navy - SH

(Project 5935-3770-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

ISTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems Enter in block 6 any remarks not related to a specific paragraph of the document If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 5523)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 5523)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-C-28754/11E	Connectors, Electrical, Modular, Type IV, 40 Contact, Right Angle (For Solid or Dip Frame)

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)* _____
b ADDRESS *(Street, City, State, ZIP Code)*	

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:33Z
Check this source to verify that this is the current version before use.