MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, SINGLE SPAN (FOR SOLID OR DIP FRAME)

This limited coordination military specification has been prepared by the Naval Electronic Systems Command based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-C-28754/12. It is subject to modification. However, pending its promulgation as a coordinated military specification, it may be used in procurement.

The complete requirements for procuring the connector assembly described herein shall consist of this document and the latest issue of Specification MIL-C-28754.


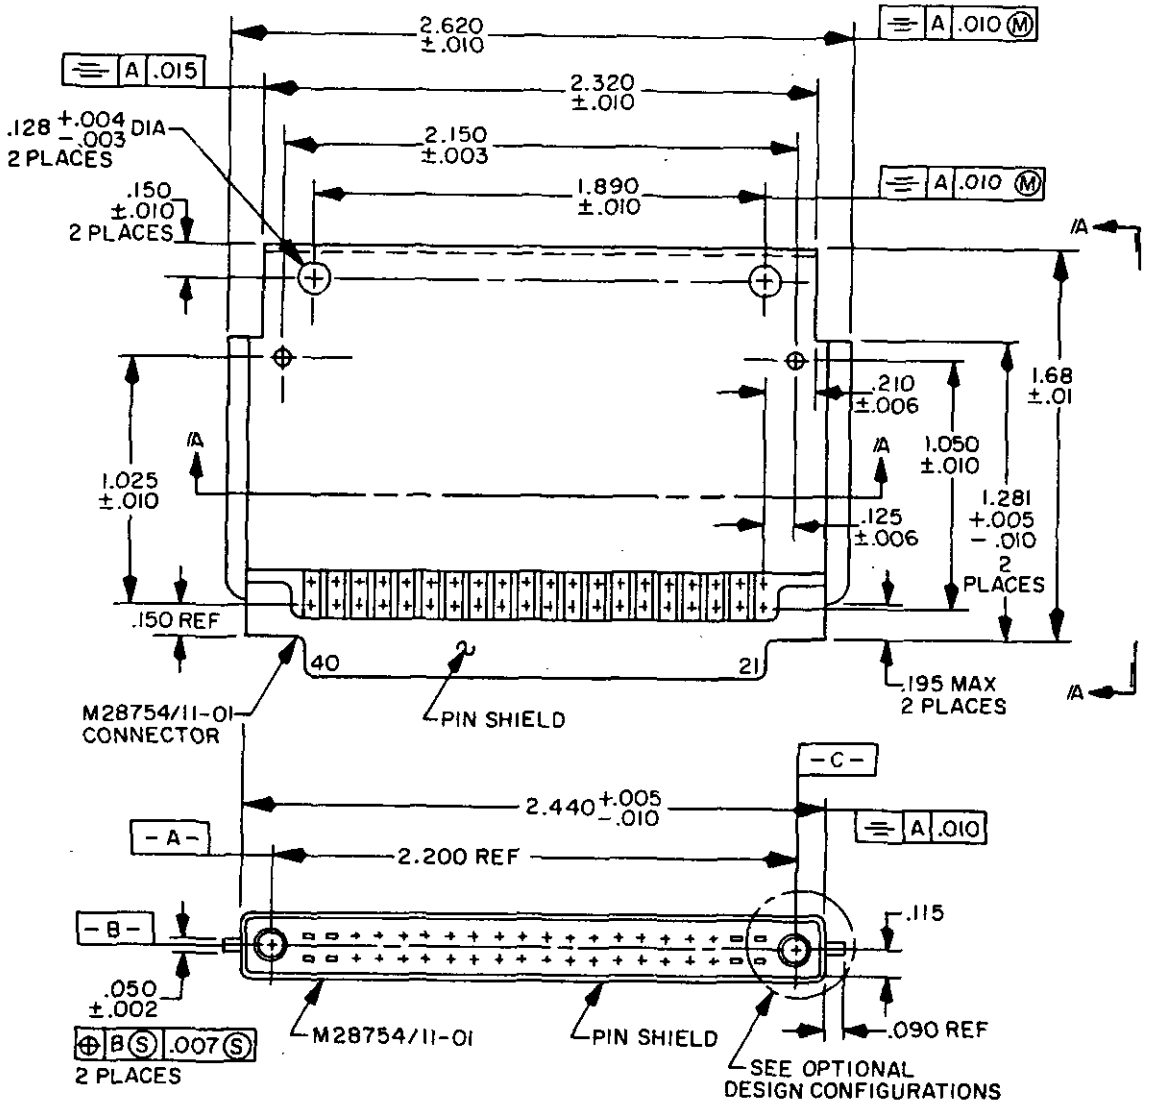


FIGURE 1. Connector assembly.


Ⓓ denotes changes

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:34Z
Check the source to verify that this is the current version before use.

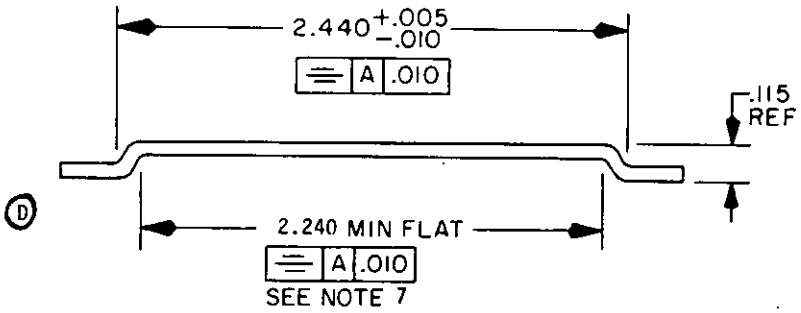

SECTION /A-/A
(HEAT SINK)

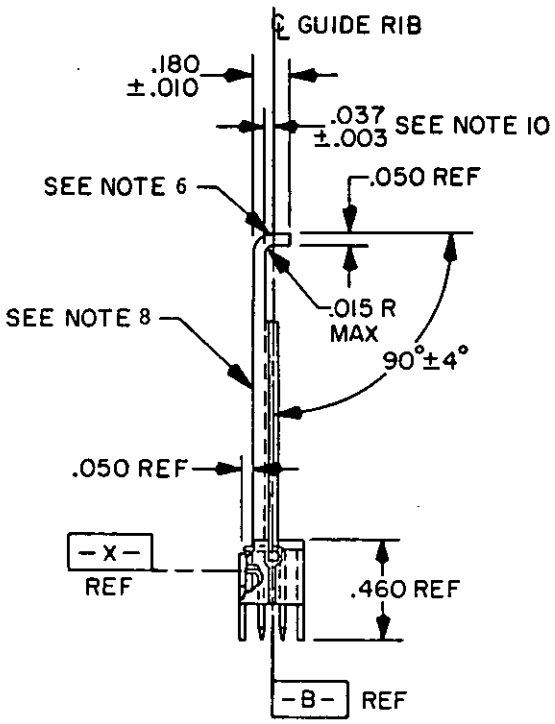


VIEW /A-/A

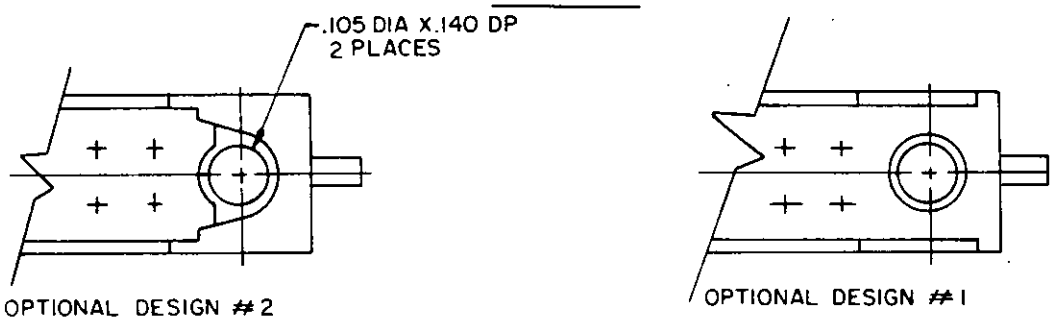

OPTIONAL DESIGN
CONFIGURATIONS

FIGURE 1. Connector assembly - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:34Z
Check the source to verify that this is the current version before use.

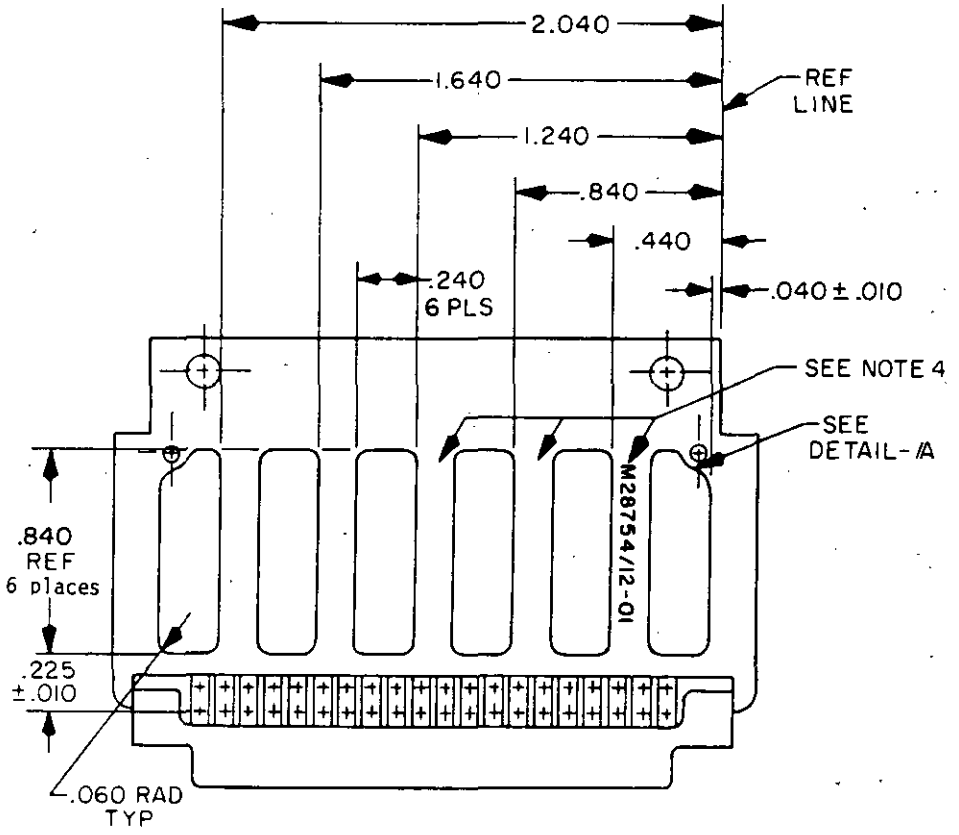


Hole patterns - M28754/12-01 and M28754/12-03

FIGURE 1. Connector assembly - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:34Z
Check the source to verify that this is the current version before use.

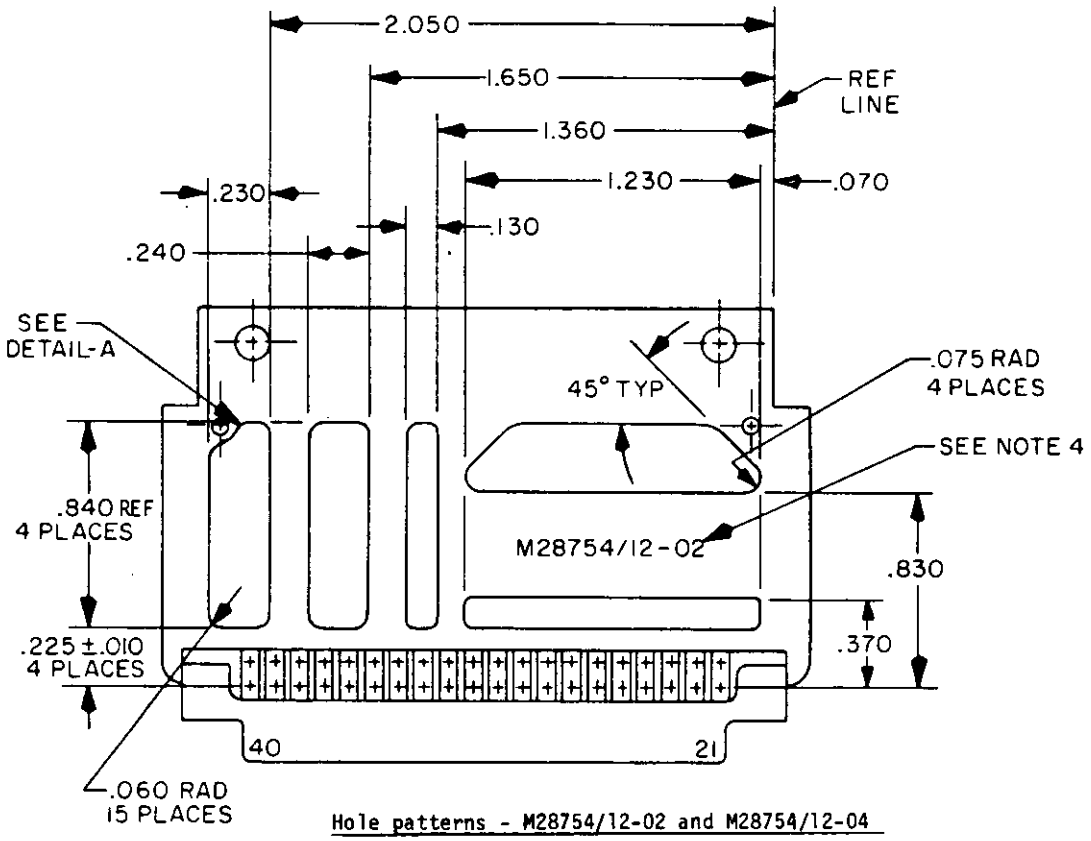

Hole patterns - M28754/12-02 and M28754/12-04

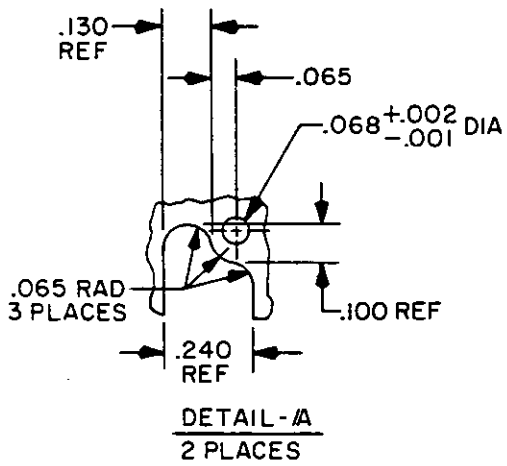

DETAIL-A
2 PLACES

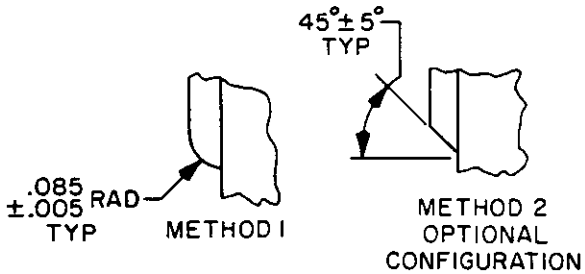

DETAIL-B
GUIDE RIB

FIGURE 1. Connector assembly - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:34Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.040	1.02	.115	2.92	.240	6.10	1.640	41.66
.002	.05	.050	1.27	.125	3.18	.370	9.40	1.650	41.91
.003	.08	.06	1.5	.128	3.25	.440	11.18	1.680	42.67
.004	.10	.060	1.52	.130	3.30	.460	11.68	1.890	48.01
.005	.13	.065	1.65	.140	3.56	.830	21.08	2.040	51.82
.006	.15	.068	1.73	.1475	3.746	.840	21.34	2.050	52.07
.007	.18	.070	1.78	.150	3.81	1.025	26.04	2.150	54.61
.010	.25	.075	1.90	.180	4.57	1.050	26.67	2.200	55.88
.015	.38	.085	2.16	.195	4.95	1.230	31.24	2.320	58.93
.020	.51	.090	2.29	.210	5.33	1.240	31.50	2.440	61.98
.034	.86	.100	2.54	.225	5.72	1.281	32.54	2.620	66.55
.037	.94	.105	2.67	.230	5.84	1.360	34.54		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 on decimals and ±2° on angles.
4. Marking, this area in white or yellow characters, .06 inch high, either side.
5. Frame surface to be flush with the connector within +.007 -.004.
6. Top surface of the fin shall be flat for a minimum .090 inch width along the total length.
7. Frame shall be flat within .006 T.I.R. in area described by section "A-A".
8. Frame to be perpendicular to connector mating interface within +.005 (solder tail side) -.010 (opposite side).
9. Datum "B" is established by a plane passing thru the center of the keying pin holes located by the 2.200 dimension.
10. The .037 ±.003 dimensions are measured from the Guide Rib Centerline.

FIGURE 1. Connector assembly - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Applicable connector: M28754/11-01.

Frame: Aluminum alloy 5052, H32, H34 or H38 in accordance with QQ-A-250/8. Anodized black in accordance with MIL-A-8625, type II, class 2.

Marking: In accordance with MIL-C-28754 and figure 1.

Military part number: M28754/12- (Dash number from table I).

(D) TABLE I. Part number and applicable connector.

Dash number	Applicable Connector	Description	Supersedes drawing number
01	M28754/11-01	Uninsulated pin shield	0102-655, code 28687
02	M28754/11-01	Uninsulated pin shield	900AS2005, code 30003
03	M28754/11-02	Insulated pin shield	
04	M28754/11-02	Insulated pin shield	

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-N185-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:34Z
Check the source to verify that this is the current version before use.