MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, SINGLE SPAN (WITHOUT GUIDE RIBS)

This limited coordination military specification has been prepared by the Naval Electronic Systems Command based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-C-28754/13. It is subject to modification, However, pending its promulgation as a coordinated military specification, it may be used in procurement.

The complete requirements for procuring the connector assembly described herein shall consist of this document and the latest issue of Specification MIL-C-28754.


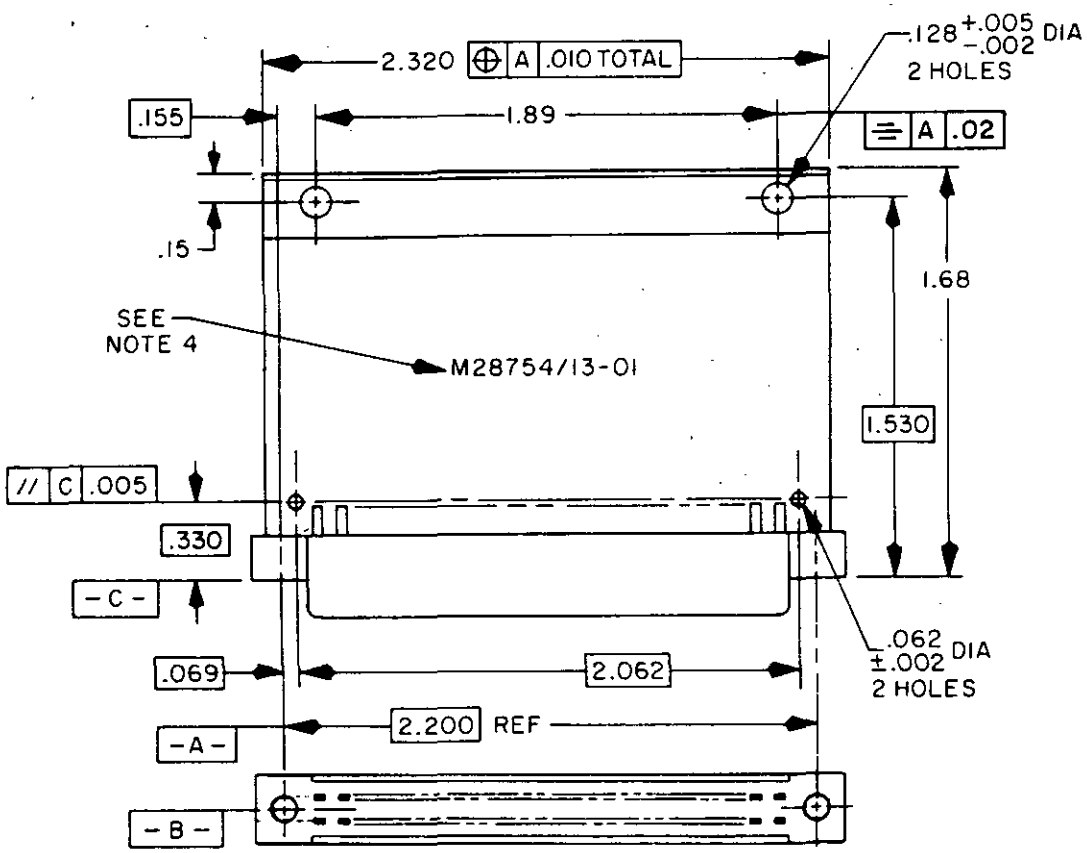


FIGURE 1. Dimensions and configurations.

Ⓑ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:34Z
Check the source to verify that this is the current version before use.

FSC 5935

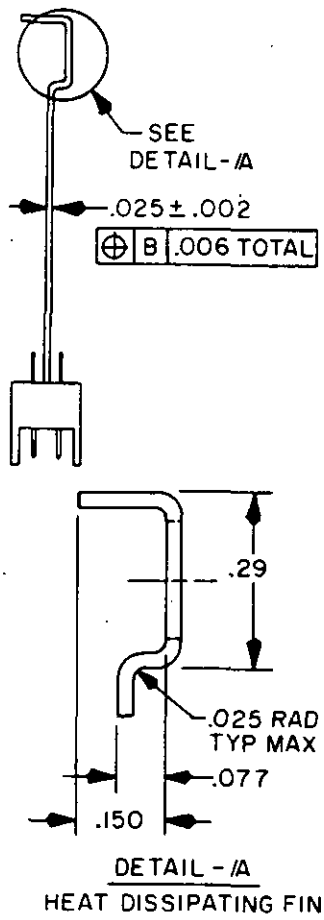

DETAIL - A
HEAT DISSIPATING FIN

INCHES	MM	INCHES	MM
.002	.05	.150	3.81
.005	.13	.155	3.94
.006	.15	.29	7.4
.010	.25	.330	8.38
.01	.3	1.062	26.97
.025	.64	1.530	38.86
.06	1.5	1.68	42.7
.062	1.57	1.89	48.0
.069	1.75	2.062	52.37
.077	1.96	2.200	55.88
.128	3.25	2.320	58.93

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals, and ±2° on angles.
4. Marking, this area in white characters, .06 inch high.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Applicable retaining guide: In accordance with MIL-C-28754/25.

Heat sink: Aluminum alloy 5052, H32, in accordance with QQ-A-250/8 or 6063, T5 in accordance with QQ-A-200/9. Surface finish anodized in accordance with MIL-A-8625, type II, class 2, black.

Marking: In accordance with MIL-C-28754 and figure 1.

Military part number: M28754/13-(Dash number from Table I).

Supersession data: This specification includes the requirements of drawing number 63A49F100, code identification number 10001.

(B) TABLE I. Part number and applicable connector.

Part Number	Applicable Connector	Description
01	M28754/6-02	Uninsulated pin shield
02	M28754/6-04	Insulated pin shield

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-N185-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:34Z
Check the source to verify that this is the current version before use.