MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR,
CRIMP, CONTACT, TYPE V

This specification is approved for use by all Department and Agencies of the Department of Defense.

The complete requirements for procuring the contact assembly described herein shall consist of this document and the latest issue of Specification MIL-C-28754.

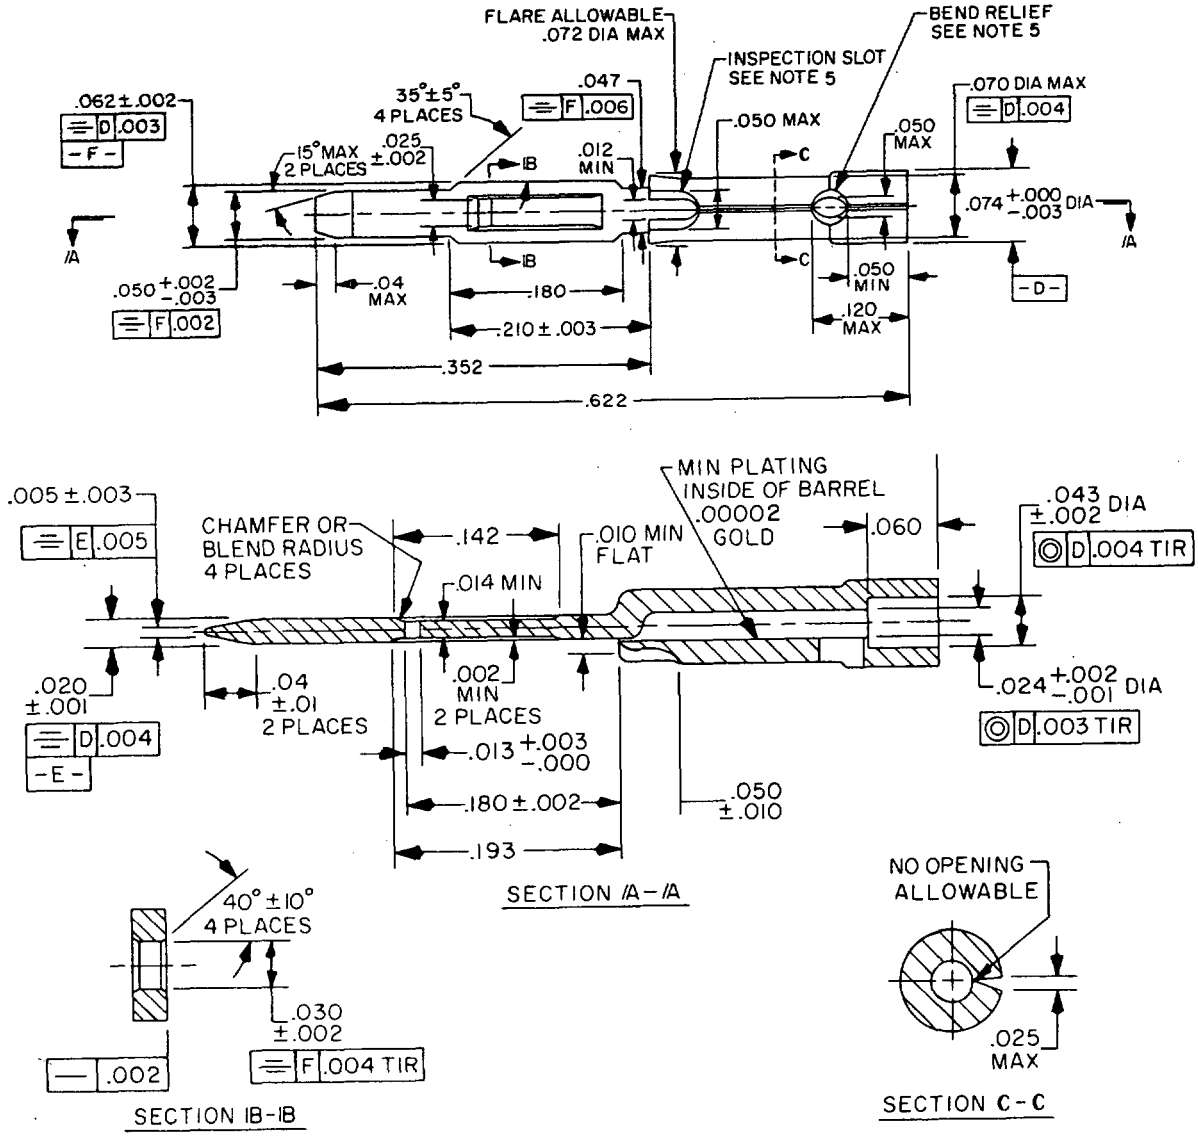


FIGURE 1. Crimp contact.

(A) Denotes change

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:35Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.00001	0.0200	.047	1.19
.001	0.03	.050	1.27
.002	0.05	.060	1.52
.003	0.08	.070	1.78
.004	0.10	.072	1.83
.005	0.13	.074	1.88
.006	0.15	.142	3.61
.010	0.25	.180	4.57
.012	0.30	.193	4.90
.013	0.33	.210	5.33
.014	0.36	.352	8.94
.020	0.51	.622	15.80
.024	0.61		
.025	0.64		
.030	0.76		
.04	1.01		
.043	1.09		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Break sharp edges .005 maximum.
4. Inside corners .005 R maximum.
5. Configuration optional within specified dimensional limits.
Ⓐ 6. Unless otherwise specified tolerance is ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.

FIGURE 1. Crimp contact - Continued.

INCHES	MM
.0005	0.01
..003	0.08
.005	0.13
.006	0.15
.008	0.20
.0090	0.23
.038	0.97
.065	1.65
.069	1.75

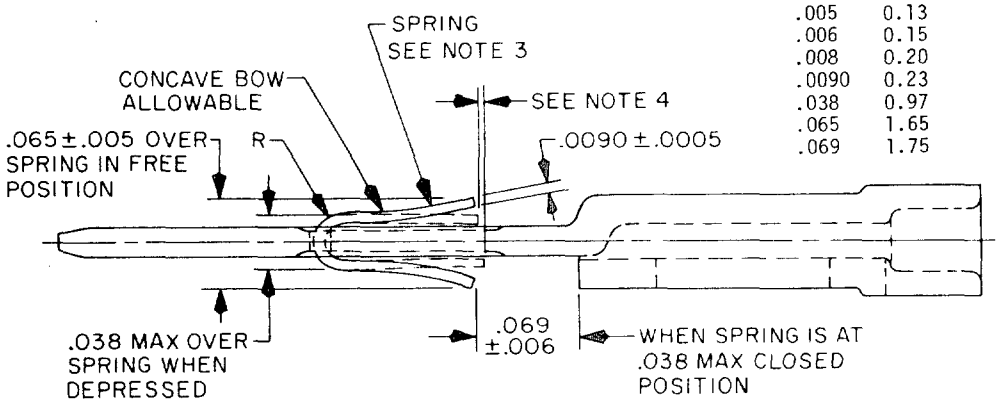


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Configuration optional within the specified limits.
4. When spring is at .038 inch maximum closed position, end must lie in line within .003.
5. Contacts are used with MIL-C-28754/16 connectors.
6. Break all sharp edges .003 inch maximum.
7. Inside corners .008 R maximum.

FIGURE 2. Crimp contact with spring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:35Z
Check the source to verify that this is the current version before use.

INCHES	MM
.001	.03
.002	.05
.003	.08
.015	.38
.030	.76
.042	1.07
.062	1.57

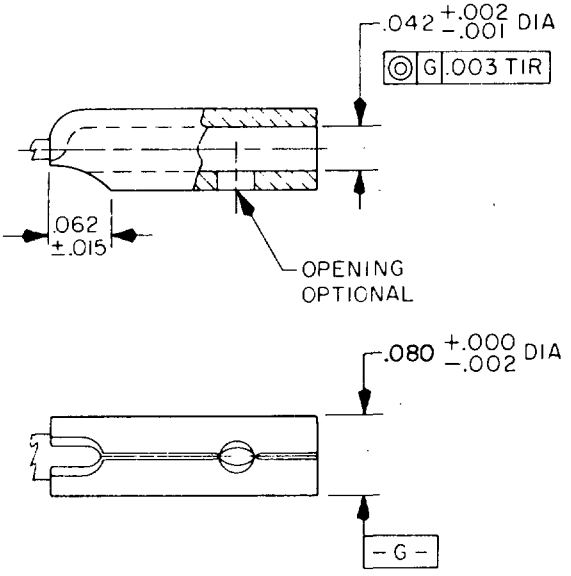

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 3. Straight backend.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Ⓐ Contacts: Contacts shall be cadmium copper alloy, cabra (Copper and Brass Association), No. 162, in accordance with the following requirements:

99.1 percent copper and 0.9 percent cadium.
Conductivity, 80 percent.
Tensile strength of 55,000 to 65,000 pounds per square inch.

Spring: Alloy 172 in accordance with QQ-C-533.

Plating: Contact plating shall be per MIL-C-28754 except that a minimum of 20 microinches of gold is required within the crimp barrel.

Ⓐ Contact resistance: See table I.

Ⓐ Current rating: See table I.

Ⓐ Temperature rating: -55° to +105°C.

Ⓐ Voltage rating: 300 volts, ac (rms) at sea level.

Ⓐ Durability: See table I.

Marking: In accordance with MIL-C-28754 and figures 1 and 2.

Military part number: M28754/15- (dash number from table I).

Crimp positioner: MIL-C-22520/2.

Crimp tool: MIL-C-22520/2-01.

Ⓐ TABLE I. Dash number and characteristics.

Dash number	Contact figure	Backend figure	Conductor size	Current rating	Contact resistance	Durability	Crimp joint resistance
			AWG	AMPS	MV	MV	MV
01	2	1	26	2.4	16.0	16.0	4.0
			28	2.0	13.3	13.3	4.0
			30	1.1	7.4	7.4	4.0
02	2	3	20	3.0	20.0	20.0	4.0
			22	3.0	20.0	20.0	4.0
			24	3.0	20.0	20.0	4.0

Supersession data: This specification includes the requirements of drawings number 2826482 and 2826727, code identification number 10001.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army -
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS
Air Force -

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3036-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:35Z
Check the source to verify that this is the current version before use.