MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, BLOCK, 40 PIN, TYPE V, STRAIGHT THROUGH

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28754.

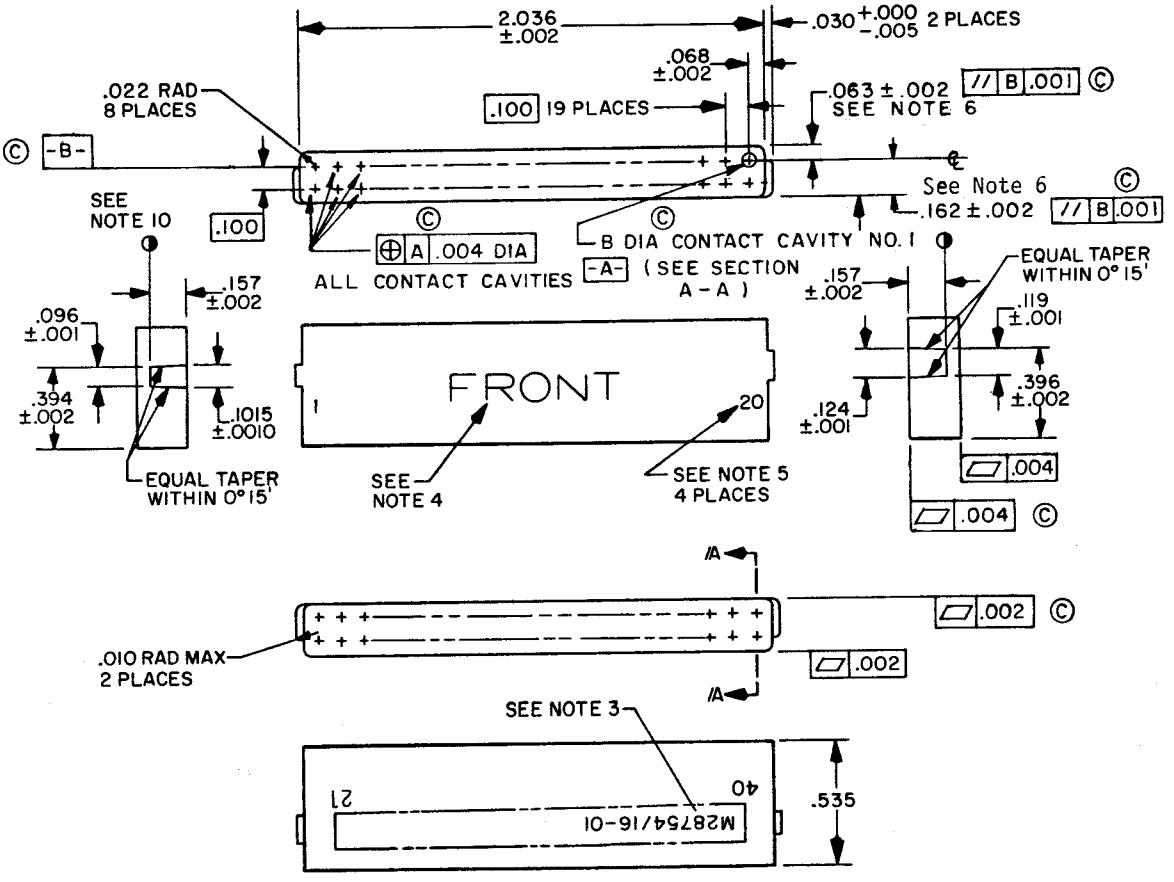



FIGURE 1. Dimensions and configurations.

Ⓒ denotes changes

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:35Z
Check the source to verify that this is the current version before use.

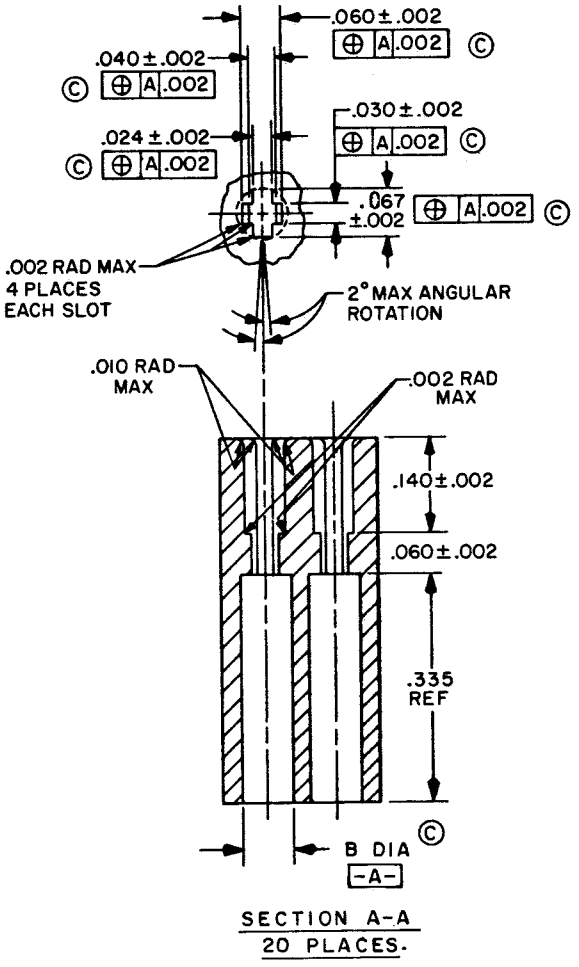

SECTION A-A
20 PLACES.

INCHES	MM	INCHES	MM
.001	0.03	.100	2.54
.002	0.05	.1015	2.58
.004	0.10	.119	3.02
.005	0.13	.12	3.
.010	0.25	.124	3.15
.022	0.56	.140	3.56
.024	0.61	.157	3.99
.030	0.76	.167	4.24
.040	1.02	.225	5.72
.06	1.5	.335	8.51
.060	1.52	.394	10.01
.063	1.60	.396	10.06
.067	1.70	.535	13.59
.068	1.73	2.036	51.71
.096	2.44		

©

DASH NUMBER	B DIA. ±.001
-01	.076
-02	.081

NOTES:
1. Dimensions are in inches and include draft.
2. Metric equivalents are given for general information only.
3. Mark in this area in color contrasting characters, .06 inch high.
4. Mark characters central to surface within .12 inch, color contrasting characters .12 inch high.
5. Contact numbers 1, 20, 21, and 40 shall be marked in color contrasting characters .06 inch high.
6. Perfect form not required at MMC.
7. Dimensions apply in flat restrained position.
8. Unless otherwise specified, internal and external corners shall have .005 R maximum.
9. Gates shall be flush to .002 below surface.
10. ◑ Two surfaces to be in line within .002.
© 11. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals, ±.01 (0.3 mm) for two place decimals.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T14:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Contact retention: 7 pounds.

Temperature rating: -55°C to +105°C.

Voltage rating: 300 volts, ac (rms) at sea level.

Marking: In accordance with MIL-C-28754 and figure 1.

Military part number: M28754/16- (dash number from table I).

© TABLE I. Dash numbers and characteristics.

Dash no.	Crimp contact size	Applicable contact	Module block color
01	26 28 30	M28754/15-01	Blue
02	20 22 24	M28754/15-02	Green

Supersession data: This specification supersedes drawing number 2826481, code identification number 10001.

© Qualifications testing: Perform the applicable tests as specified in MIL-C-28754 and the appendix thereto.

© Extended qualifications: Qualification of M28754/16-01 or -02 extends qualifications to other products as specified in the appendix to MIL-C-28754.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3475)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:35Z
Check the source to verify that this is the current version before use.