INCH - POUND

MIL-DTL-28754/16D
21 November 2014
SUPERSEDING
MIL-C-28754/16C
19 September 1985

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, BLOCK, 40 PIN, TYPE V, STRAIGHT THROUGH

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-C-28754.


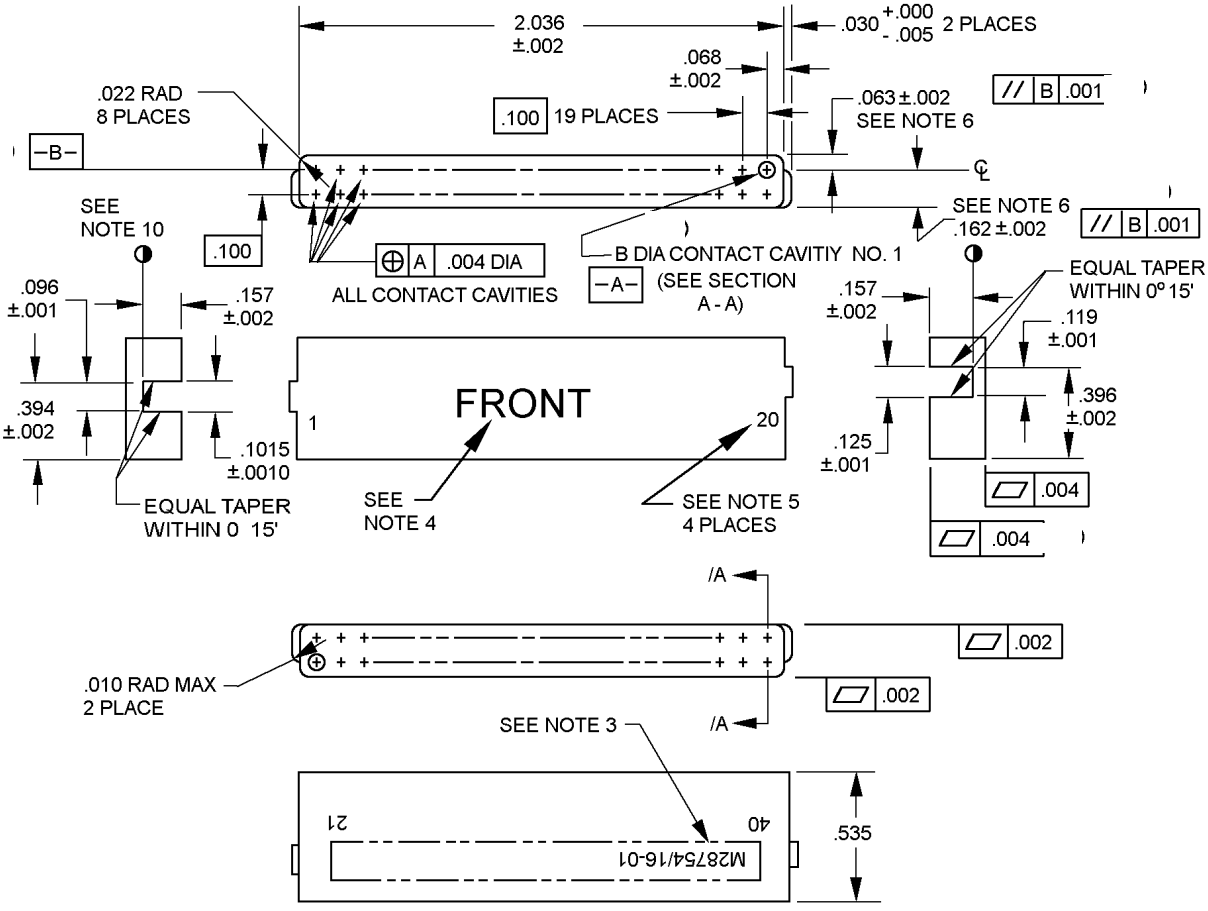


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:35Z
Check the source to verify that this is the current version before use.

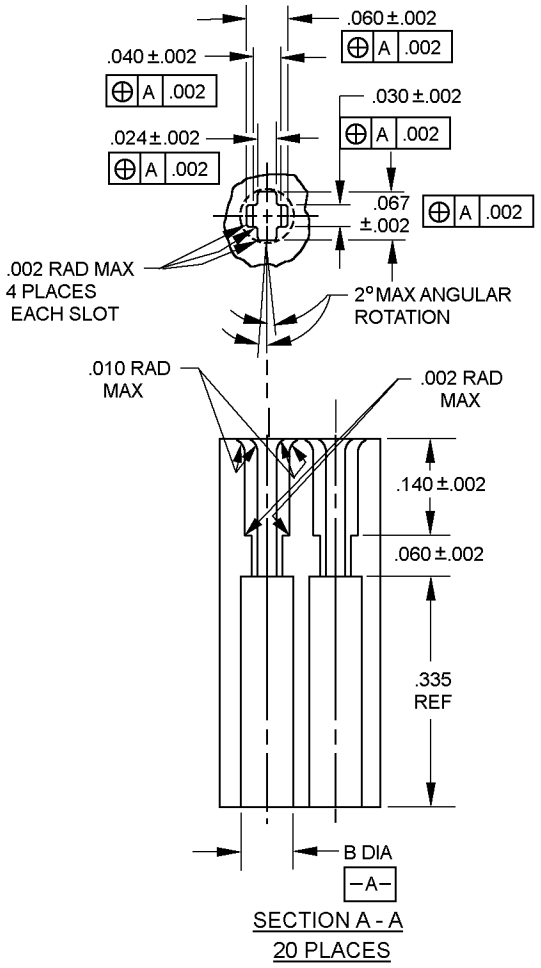

Inches	mm	Inches	mm
.001	0.03	.100	2.54
.002	0.05	.1015	2.58
.004	0.10	.119	3.02
.005	0.13	.12	3.
.010	0.25	.124	3.15
.022	0.56	.140	3.56
.024	0.61	.157	3.99
.030	0.76	.167	4.24
.040	1.02	.225	5.72
.06	1.5	.335	8.51
.060	1.52	.394	10.01
.063	1.60	.396	10.06
.067	1.70	.535	13.59
.068	1.73	2.036	51.71
.096	2.44		

Dash number	B DIA ± .001
-01	.076
-02	.081

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Mark in this area in color contrasting characters, .06 inch high.
4. Mark characters central to surface within .12 inch, color contrasting characters .06 inch high.
5. Contact numbers 1, 20, 21, and 40 shall be marked in color contrasting characters .06 inch high.
6. Perfect form not required at MMC.
7. Dimensions apply in flat restrained position.
8. Unless otherwise specified, internal and external corners shall have .005 R maximum.
9. Gates shall be flush to .002 below surface.
10. Two surfaces to be in line within .002.
11. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals, ± .01 (0.3 mm) for two place decimals.

FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Contact retention: 7 pounds.

Temperature rating: -55°C to +105°C.

Voltage rating: 300 volts, ac (rms) at sea level.

Marking: In accordance with MIL-C-28754 and figure 1.

Part or Identifying Number (PIN): M28754/16- (dash number from table I).

TABLE I. Dash numbers and characteristics.

Dash no.	Crimp contact size	Applicable contact	Module block color
01	26 28 30	M28754/15-01	Blue
02	20 22 24	M28754/15-02	Green

First article testing: Perform the applicable tests as specified in MIL-C-28754 and the appendix thereto.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. This document references MIL-C-28754.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:35Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2014-068)

Review activities:
Army AR, MI
Navy – MC
Air Force – 99

NOTE: The activities above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:35Z
Check the source to verify that this is the current version before use.