
MILITARY SPECIFICATION SHEET

# CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE V, STYLE I, CONTACT TAILS ON .100 CENTERS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector assemblies described herein shall consist of this specification and the latest issue of MIL-C-28754.

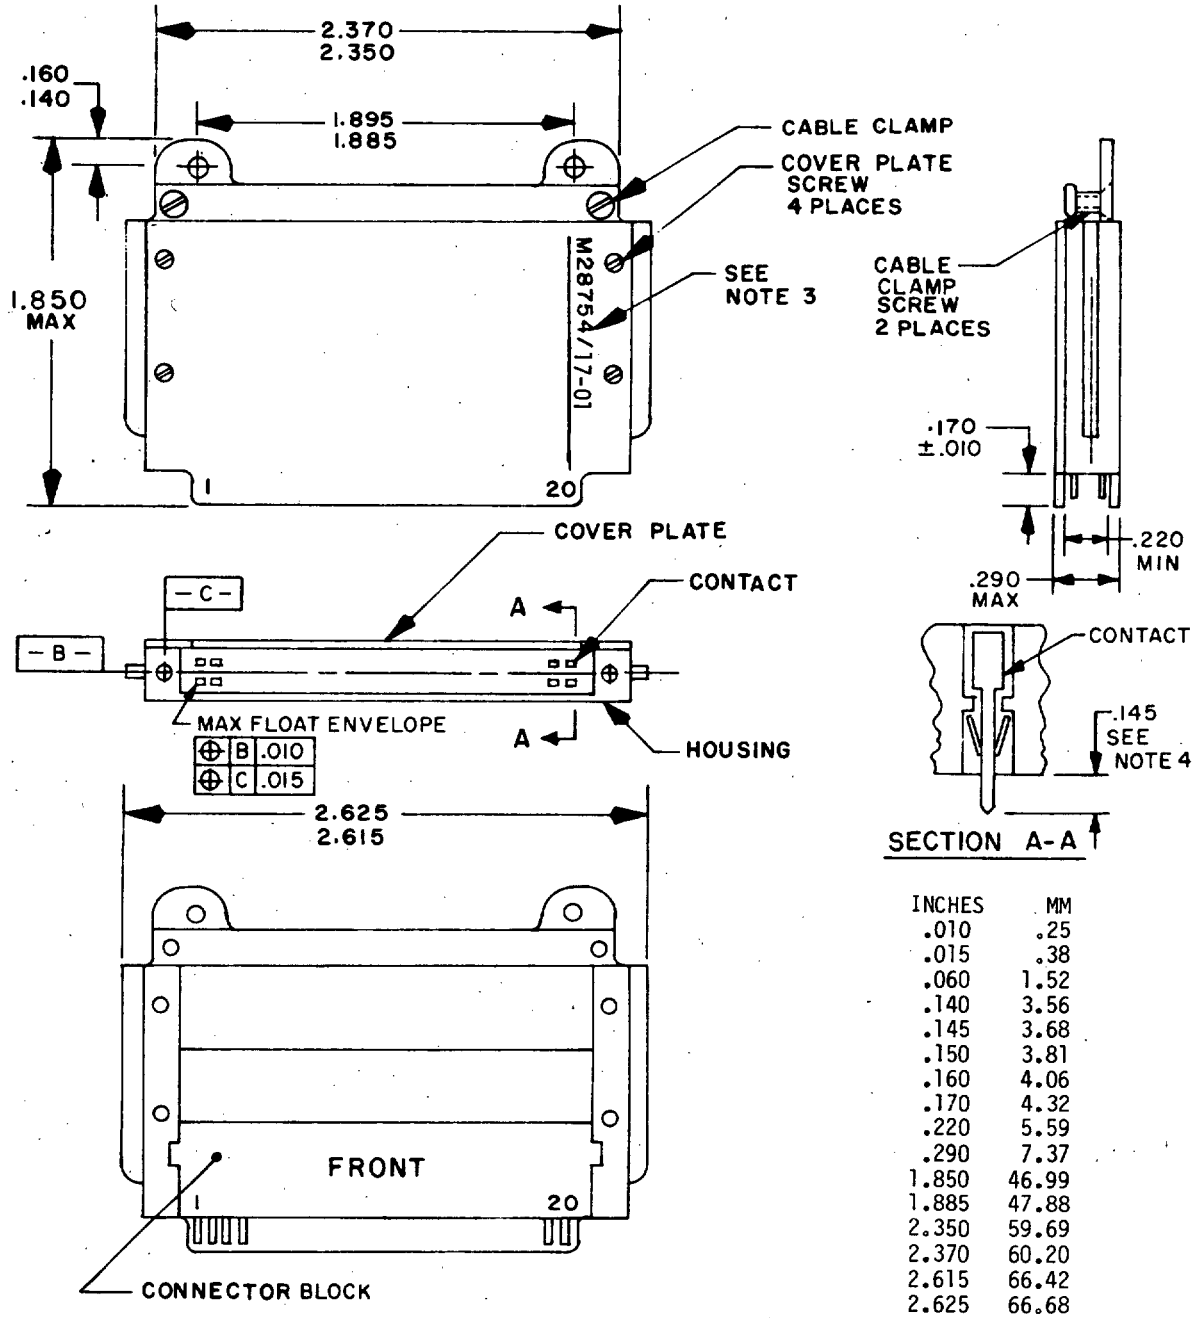


CONNECTOR ASSEMBLY WITH COVER PLATE REMOVED

FIGURE 1. Connector assembly type V.

| INCHES | MM |
|---|---|
| .010 | .25 |
| .015 | .38 |
| .060 | 1.52 |
| .140 | 3.56 |
| .145 | 3.68 |
| .150 | 3.81 |
| .160 | 4.06 |
| .170 | 4.32 |
| .220 | 5.59 |
| .290 | 7.37 |
| 1.850 | 46.99 |
| 1.885 | 47.88 |
| 2.350 | 59.69 |
| 2.370 | 60.20 |
| 2.615 | 66.42 |
| 2.625 | 66.68 |

© denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:36Z
Check the source to verify that this is the current version before use.



FSC 5935

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Mark in this area in contrasting color characters, .30 inch high maximum. Marking can be vertical or horizontal.
4. This dimension applies after assembly of contacts.
5. Component parts to be supplied unassembled.
6. Unless otherwise specified tolerance are ±.005 on three place decimals ±2° on angle.

FIGURE 1. Connector assembly type V - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and applicable MS sheet.

Applicable connector block: In accordance with MIL-C-28754/16.

Applicable contact assembly: In accordance with MIL-C-28754/15.

Applicable housing: In accordance with MIL-C-28754/49 and table I.

Applicable cover plate: In accordance with MS14061 and table I.

Applicable cover plate screw: In accordance with MS14065.

Applicable cable clamp: In accordance with MS14060.

Applicable cable clamp screw: In accordance with MS14066.

Contact installing tool: MIL-I-81969/2.

Contact removal tool: MIL-I-81969/3.

Marking: In accordance with MIL-C-28754, figure 1, and table I.

Military part number: M28754/17- (dash number from table I).

TABLE I. Dash numbers and characteristics.

| Dash number | Connector | MIL-C-28754/49 housing (type) | MS14061 cover plate (type) |
|---|---|---|---|
| 01 | M28754/16-01 | A | A |
| 02 | M28754/16-01 | B | B |
| 03 | M28754/16-01 | C | A |
| 04 | M28754/16-02 | A | A |

Supersession data: This specification includes the requirements of drawing number 2826728, code identification number 10001.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3266-16)

☆U.S. GOVERNMENT PRINTING OFFICE: 1983-605-034/648



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:36Z
Check the source to verify that this is the current version before use.