

MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, MODULAR, SPACER, PIN, TYPE IV, SINGLE SPAN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the spacer pin described herein shall consist of this document and the latest issue of Specification MIL-C-28754.

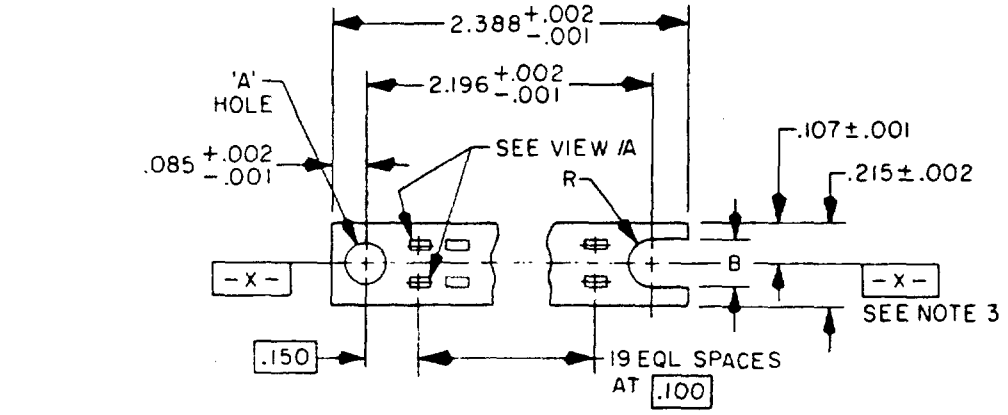

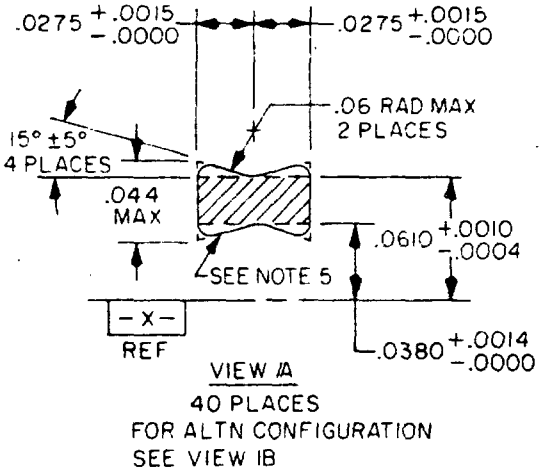

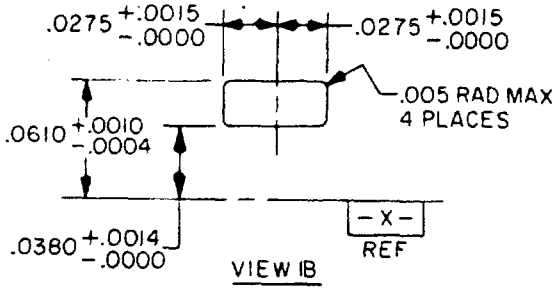

Dash number	"A" Dia ±.0005	"B" Dim ±.0005	Thickness
01	.1005	.1255	.018 ±.002 -.001
02	.1005	.1005	
03	.1255	.1255	

FIGURE 1. Dimensions and configurations.

(A) Denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:36Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
.0004	.01	.0275	.70	.1005	2.55
.0005	.01	.03	.76	.107	2.72
.0010	.03	.0380	.97	.1255	3.19
.0014	.04	.044	1.12	.150	3.81
.0015	.04	.06	1.52	.215	5.46
.002	.05	.0610	1.55	2.196	55.78
.005	.13	.085	2.16	2.388	60.66
.018	.46	.100	2.54		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. A line passing through the centers of hole A and slot B establishes -X-.
4. Break sharp edges .03 maximum.
5. Corners may have radius provided dimensions of area shown by ▨ are maintained.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: The following materials may be used.

1. Laminated epoxy glass, GEB, per MIL-P-18177.
2. Diallyl phthalate, glass filled, per MIL-M-14, type SDG.
3. Phenylene-oxide resin, glass fiber reinforced, per WS6268.
4. Glass reinforced polycarbonate resin, per WS6136 with the following exceptions:

a. The following requirements of NAVORD drawing WS6136, code identification 10001, shall be met or exceeded:

Glass content	Fatigue
Specific gravity	Endurance limit
Flexural strength	IZOD impact test.
Flexural modulus	

b. The following requirements shall be less than or equal to those of NAVORD drawing WS6136, code identification 10001:

Shrinkage	Coefficient of linear thermal expansion
Moisture absorption	Deformation under load.

Ⓐ Marking: In accordance with MIL-C-28754.

Military part number: M28754/18- (dash number from Figure 1).

Supersession data: This specification includes the requirements of drawing 2672362, code identification 10001.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army -
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS
Air Force -

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3036-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:36Z
Check the source to verify that this is the current version before use.