MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, SPACER, PIN, TYPE IV, DOUBLE SPAN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the spacer pins described herein shall consist of this document and the latest issue of Specification MIL-C-28754.

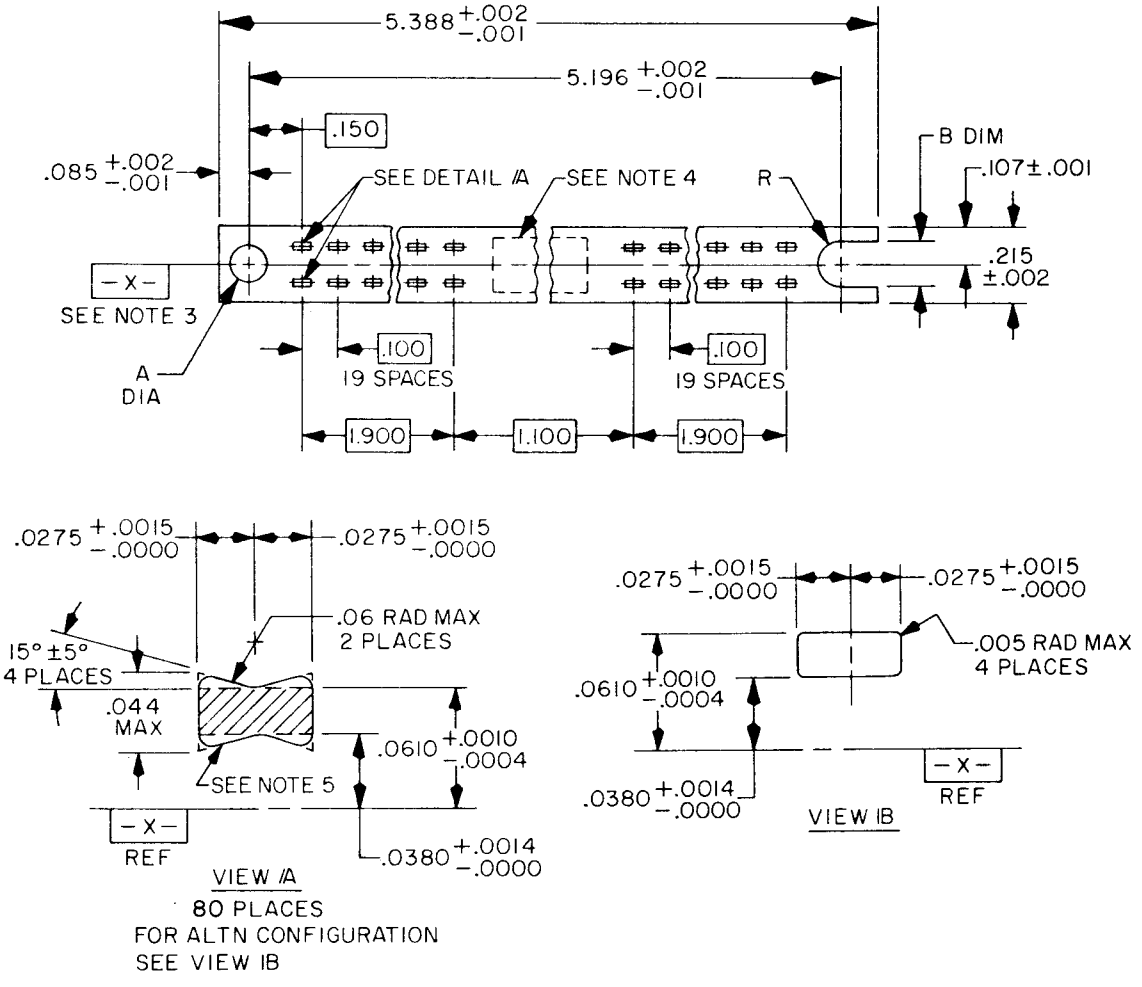


FIGURE 1. Dimensions and configurations.

Ⓐ Denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:36Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
.0004	.010	.0275	.698	.107	2.72
.0005	.013	.0380	.965	.1255	3.188
.0010	.025	.044	1.12	.150	3.81
.0014	.036	.06	1.5	.215	5.46
.0015	.038	.0610	1.549	1.100	27.94
.002	.05	.085	2.16	1.900	48.26
.005	.13	.100	2.54	5.196	131.98
.01	.3	.1005	2.553	5.388	136.86
.018	.46				

Dash number	"A" Dia ±.0005	"B" Dim ±.0005	Thickness
01	.1005	.1255	.018 $^{+.002}_{-.001}$
02	.1005	.1005	
03	.1255	.1255	

Ⓐ NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. A line passing through the centers of the "A" diameter hole and the "B" dimension slot establishes [- X -] .
4. Marking, this area in white characters, .06 inch high.
5. Corners may have a radius provided that dimensions of area shown by ▨ are maintained.
6. Unless otherwise specified, tolerances are ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T14:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: The following materials may be used.

1. Laminated epoxy glass, GEB, per MIL-P-18177.
2. Diallyl phthalate, glass filled, per MIL-M-14, type SDG.
3. Phenylene-oxide resin, glass fiber reinforced, per WS6268.
4. Glass reinforced polycarbonate resin, per WS6136 with the following exceptions:

   a. The following requirements of NAVORD drawing WS6136, code identification 10001, shall be met or exceeded:

      Glass content
      Specific gravity
      Flexural strength
      Flexural modulus
      Fatigue
      Endurance limit
      1ZOD impact test.

   b. The following requirements shall be less than or equal to those of NAVORD drawing WS6136, code identification 10001:

      Shrinkage
      Moisture absorption
      Coefficient of linear thermal expansion
      Deformation under load.

Ⓐ Marking: In accordance with MIL-C-28754 and figure 1.

Military part number: M28754/20- (dash number from figure I).

Supersession data: This specification includes the requirements of drawing number 0102-667, code identification 10001.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army -
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS
Air Force -

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3036-20)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:36Z
Check the source to verify that this is the current version before use.