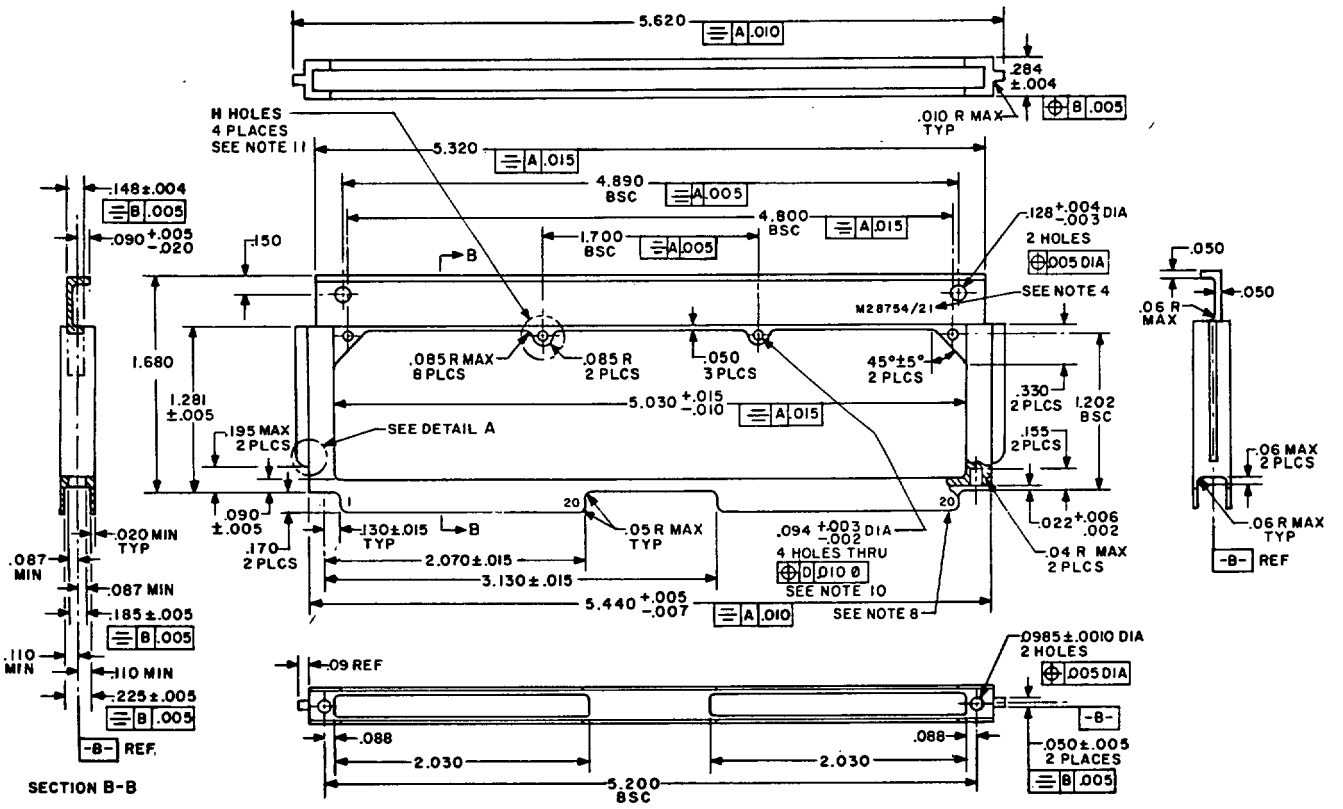
MILITARY SPECIFICATION SHEET

# CONNECTORS, ELECTRICAL, MODULAR, FRAME, CASTING, TYPE IV, DOUBLE SPAN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector assembly described herein shall consist of this document and the latest issue of Specification MIL-C-28754.



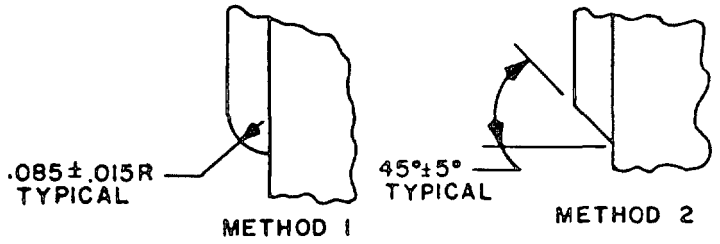

Ⓓ FIGURE 1. Dimensions and configurations.

Ⓓ Denotes change.



FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.




DETAIL A

| INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|---|---|---|---|
| .0010 | .025 | .02 | .5 | .088 | 2.24 | .170 | 4.32 | 2.070 | 52.58 |
| .002 | .05 | .020 | .51 | .090 | 2.29 | .185 | 4.70 | 3.130 | 79.50 |
| .003 | .08 | .022 | .56 | .09 | 2.3 | .195 | 4.95 | 4.800 | 121.92 |
| .004 | .10 | .03 | .8 | .0985 | 2.502 | .225 | 5.72 | 4.890 | 124.21 |
| .005 | .13 | .04 | 1.02 | .110 | 2.79 | .284 | 7.21 | 5.030 | 127.76 |
| .006 | .15 | .050 | 1.27 | .128 | 3.28 | .330 | 8.38 | 5.200 | 132.08 |
| .007 | .18 | .05 | 1.3 | .130 | 3.30 | 1.202 | 30.53 | 5.320 | 135.13 |
| .010 | .25 | .06 | 1.5 | .148 | 3.76 | 1.281 | 32.54 | 5.440 | 138.18 |
| .01 | .3 | .085 | 2.16 | .150 | 3.81 | 1.680 | 42.67 | 5.620 | 142.75 |
| .015 | .38 | .087 | 2.21 | .155 | 3.94 | 2.030 | 51.56 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals and $\pm 2^{0}$ on angles.
4. Marking, this area in white characters, .06 inch high.
5. All surfaces to have 125 microinch finish.
6. Fillets and edges will have .02 radius maximum unless otherwise specified.
7. A line passing through the centers of the (2) .0985 ±.0010 diameter holes establishes [- B -] .
8. Contact numbers 1 and 20 shall be marked on the pin shield in white characters, .06 inch high on opposite side mark 21 and 40.
9. Casting shall not show evidence of flashing or ejector pin marks that extend above the surface.
10. These 4 holes accommodate insert M28754/41-01 and screw M28754/40-01.
11. Center two H holes shall have a .170 ±.03 diameter area on both sides coated with a chemical film.

(D)

FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Aluminum alloy, casting, 360 or 380 in accordance with QQ-A-591.

Chemical film: MIL-C-5541, class 3 (see note 11).

Anodic coating: MIL-A-8625, type II, class 1, black on all other surfaces except surfaces indicated (see note 11).

Casting: Casting shall not show evidence of flashing or ejector pin marks that extent above surface.

Marking: In accordance with MIL-C-28754 and figure 1.

Military part number: M28754/21.

(D) Supersession data: This specification includes the requirements of drawing number 2874493-3.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army -
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS
Air Force -

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3213)



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.