MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV
40 PIN, STRAIGHT THROUGH

This limited coordination military specification has been prepared by the Naval Electronic Systems Command based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-C-28754/6. It is subject to modification. However, pending its promulgation as a coordinated military specification, it may be used in procurement.

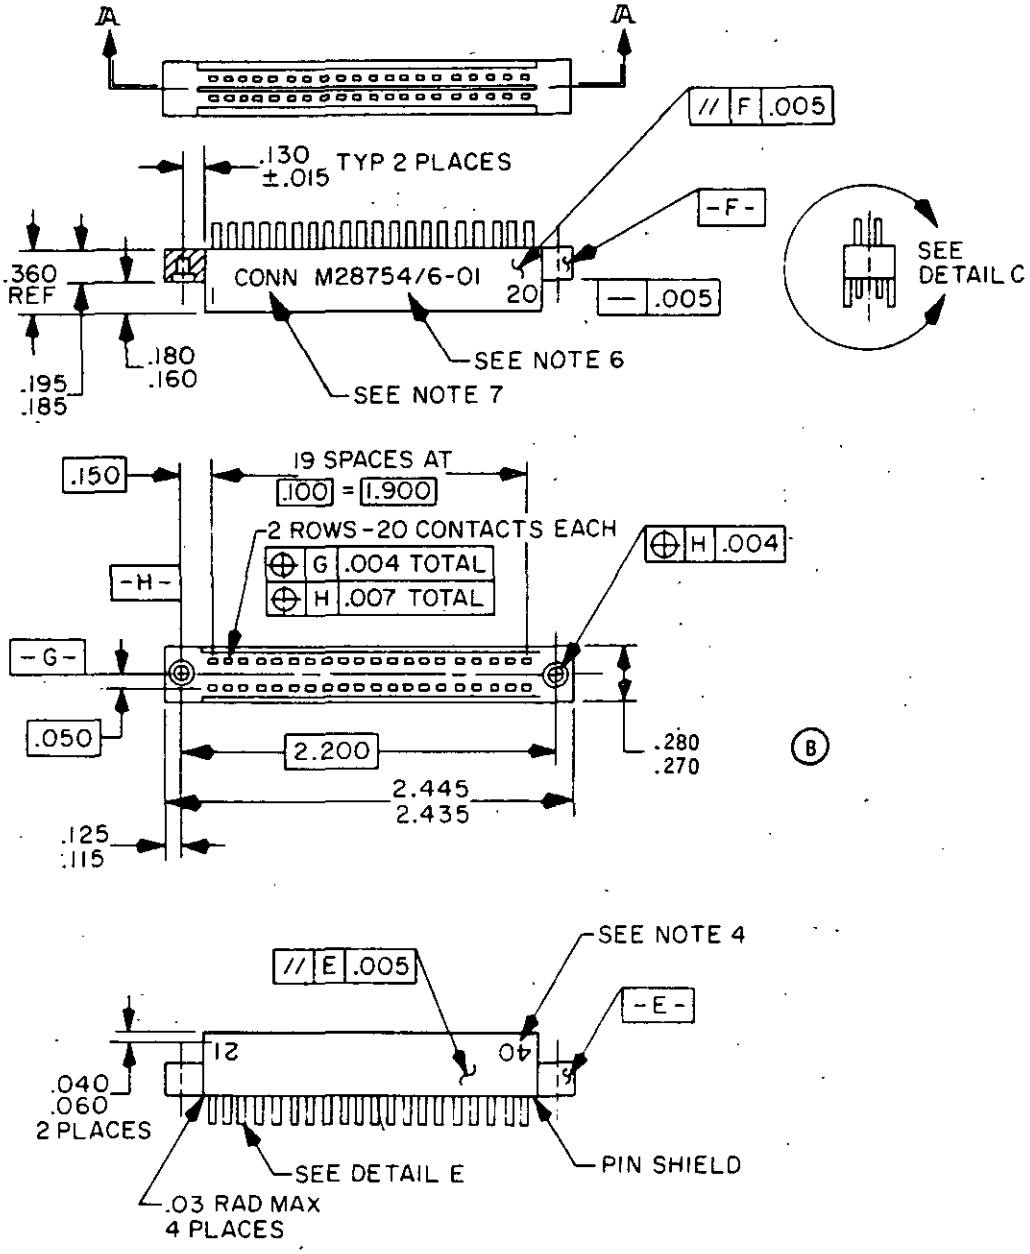


FIGURE 1. Dimensions and configurations.

(B) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.


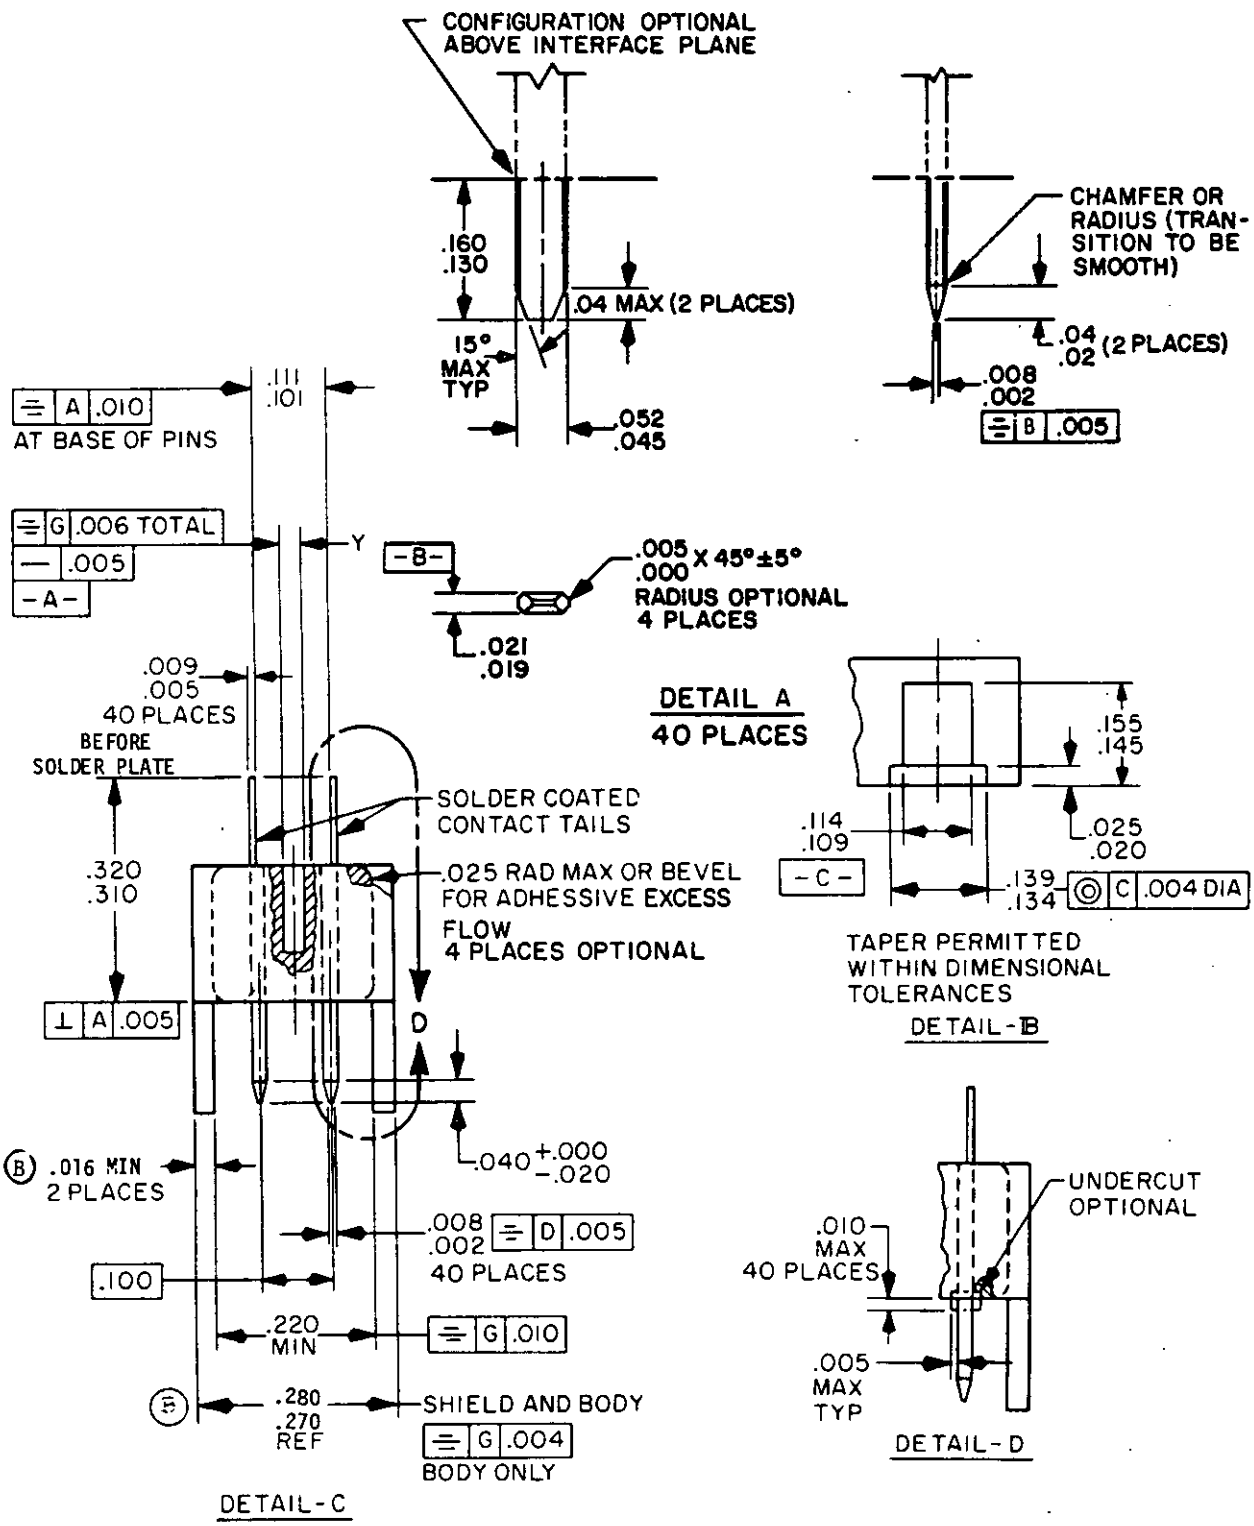


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.

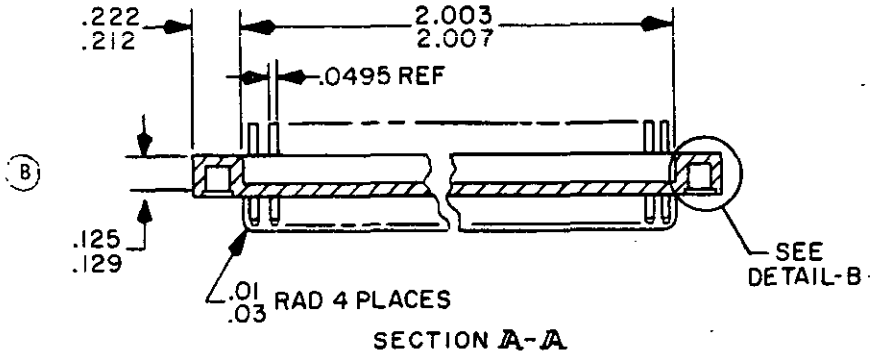

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.047	1.19	.126	3.20	.220	5.59
.004	.10	.0495	1.26	.129	3.28	.222	5.64
.005	.13	.050	1.27	.130	3.30	.270	6.86
.006	.15	.052	1.32	.134	3.40	.280	7.11
.007	.18	.060	1.52	.139	3.53		
.008	.20	.096	2.44	.145	3.68	.310	7.87
.009	.23	.100	2.54	.150	3.81	.320	8.13
.010	.25	.101	2.57	.155	3.94	.360	9.14
.015	.38	.109	2.77	.160	4.06	1.900	48.26
.019	.48	.111	2.82	.180	4.57	2.003	50.88
.020	.51	.114	2.99	.185	4.70	2.007	50.98
.021	.53	.115	2.92	.195	4.95	2.200	55.88
.025	.64	.125	3.18	.212	5.38	2.435	61.35
.03	.76					2.445	62.10
.040	1.02						
.045	1.14						

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 on 3 place decimals and ±.01 on 2 place decimals and ±2° on angles.
4. (B) Contact numbers 1, 20, 21 and 40 shall be marked on pin shield in color contrasting characters, .06 inch high.
5. Flash around blade contacts not to exceed .010 from the body and shall be firmly attached.
6. (B) Marking this area in color contrasting characters, .06 inch high.
7. (B) The letters CONN are to be marked in color contrasting characters, .06 inch high and are to proceed the military part number but are not to be included in the part number.
8. The line referred to as -G- designates a plane passing thru the axis of the two .114 $^{+.000}_{-.005}$ diameter keying pin holes.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Contacts: See figure 1.

(B) Plating: Contact plating shall be per MIL-C-28754. Solder coated contact tail shall be tinned (see detail C) with solder to a thickness of 0.0005 inch to 0.003 inch and solder shall cover tails. Solder used shall be in accordance with QQ-S-571, type Sn60, form B, type S. A noncorrosive flux may be used per MIL-F-14256, type RMA.

(B) Pin shield:
Dash numbers 01 and 02: Aluminum alloy, 3/4 hard in accordance with QQ-A-250. Anodized black in accordance with MIL-A-8625, type II, class 2.
Dash numbers 03 and 04 (Insulated): Aluminum alloy, 3/4 hard in accordance with QQ-A-250. Anodized black in accordance with MIL-A-8625, type III, class 2. Alternate material: Unclad epoxy glass laminate in accordance with MIL-P-13949, type GF.

Contact resistance: Voltage drop shall not exceed 20 millivolts.

Solderability: In accordance with MIL-C-28754.

Current rating: 3 amperes.

Temperature rating: -55° to +105°C.

Voltage rating: 300 volts, ac (rms) at sea level.

Durability: Voltage drop shall not exceed 20 millivolts.

Marking: In accordance with MIL-C-28754 and figure 1.

Military part number: M28754/6- (dash number from table I).

Supersession data: This specification includes the requirements of drawing number 2818331, code identification number 10001.

(B) TABLE I. Dash number and dimensions.

Dash No.	Y
01	.058 (1.47) .062 (1.57)
02	.031 (.79) .035 (.89)
03	.058 (1.47) .062 (1.57)
04	.031 (.79) .035 (.89)

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-N185-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.