MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, SINGLE SPAN, CONNECTOR ASSEMBLY

This limited coordination military specification has been prepared by the Naval Electronic Systems Command based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-C-28754/7. It is subject to modification. However, pending its promulgation as a coordinated military specification, it may be used in procurement.

The complete requirements for procuring the contact assembly described herein shall consist of this document and the latest issue of Specification MIL-C-28754.


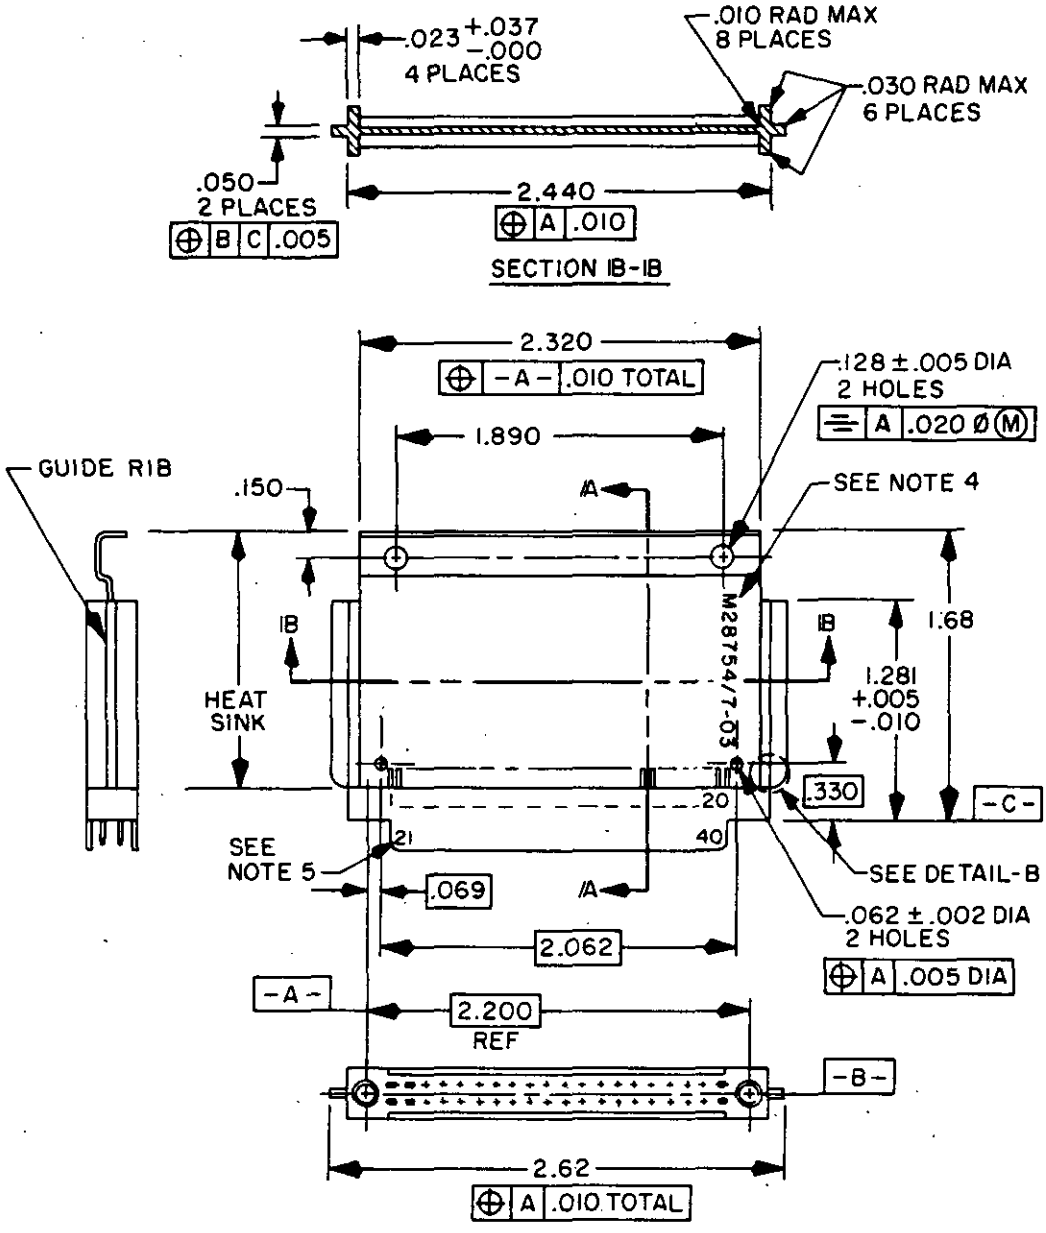


FIGURE 1. Dimensions and configurations.

Ⓑ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.

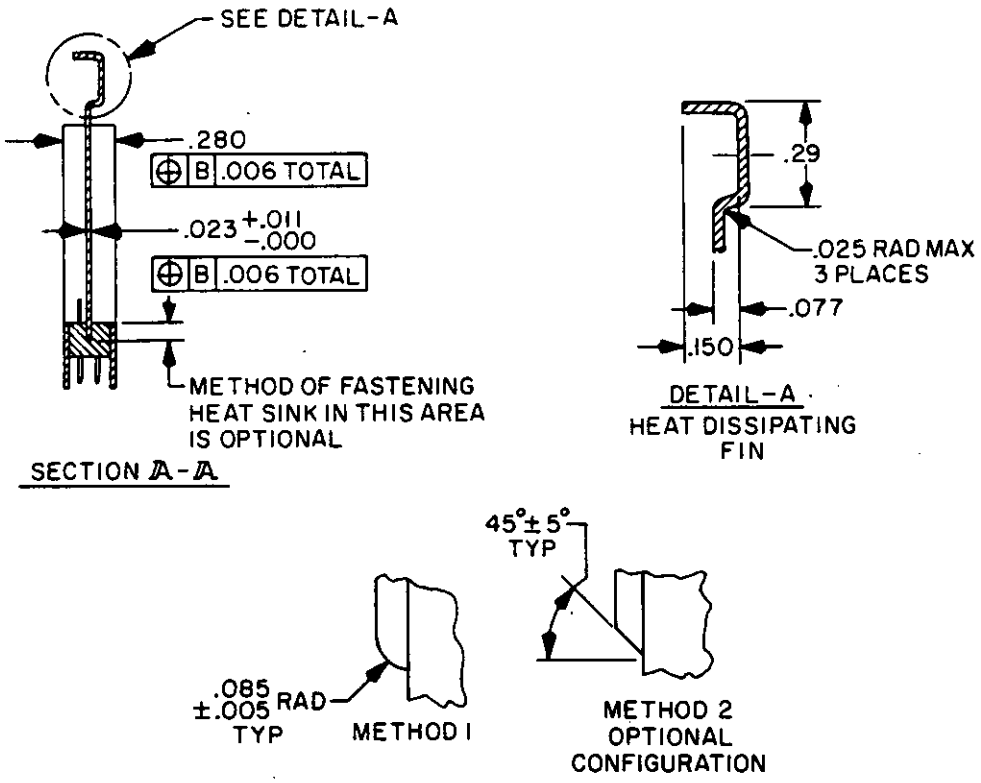

DETAIL-B

INCHES	MM	INCHES	MM
.002	.05	.114	2.90
.005	.13	.128	3.25
.006	.15	.150	3.81
.007	.18	.155	3.94
.010	.25	.280	7.11
.011	.28	.29	7.37
.015	.38	.330	8.38
.023	.58	1.281	32.54
.025	.64	1.530	38.86
.030	.76	1.68	42.67
.037	.94	1.890	48.01
.050	1.27	2.062	52.37
.062	1.57	2.200	55.88
.069	1.75	2.320	58.93
.077	1.96	2.440	61.98
.085	2.16	2.62	66.55

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 on 3 place decimals, ±.01 on 2 place decimals and ±2° on angles.
4. Marking this area in white characters, .06 inch high marking can be vertical or horizontal.
5. Contact number location dependent on connector used.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Applicable connector: See table I.

Heat sink with guide ribs: Aluminum alloy, 3/4 hard in accordance with QQ-A-250. Surface finish anodized in accordance with MIL-A-8625, type II, class 2, black.

Marking: In accordance with MIL-C-28754 and figure 1.

Military part number: M28754/7- (dash number from table I).

Supersession data: This specification includes the requirements of drawing number 2300820, code identification number 10001 and drawing number 0102-664, code identification number 28687.

Ⓑ TABLE I. Dash number and applicable connector..

Dash number	Applicable connector	Description
02	M28754/6-02	Contact tails on .100 centers
03	M28754/10-01	Contact tails on .050 centers
04	M28754/6-04	Contact tails on .100 centers insulated pin shield
05	M28754/10-03	Contact tails on .050 centers insulated pin shield

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-N185-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.