MIL-C-28754/7C
13 December 1982
SUPERSEDING
MIL-C-0028754/7B(EC)
15 June 1981
MIL-C-28754/7A(EC)
30 April 1979

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, SINGLE SPAN, CONNECTOR ASSEMBLY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contact assemblies described herein shall consist of this specification and the latest issue of MIL-C-28754.


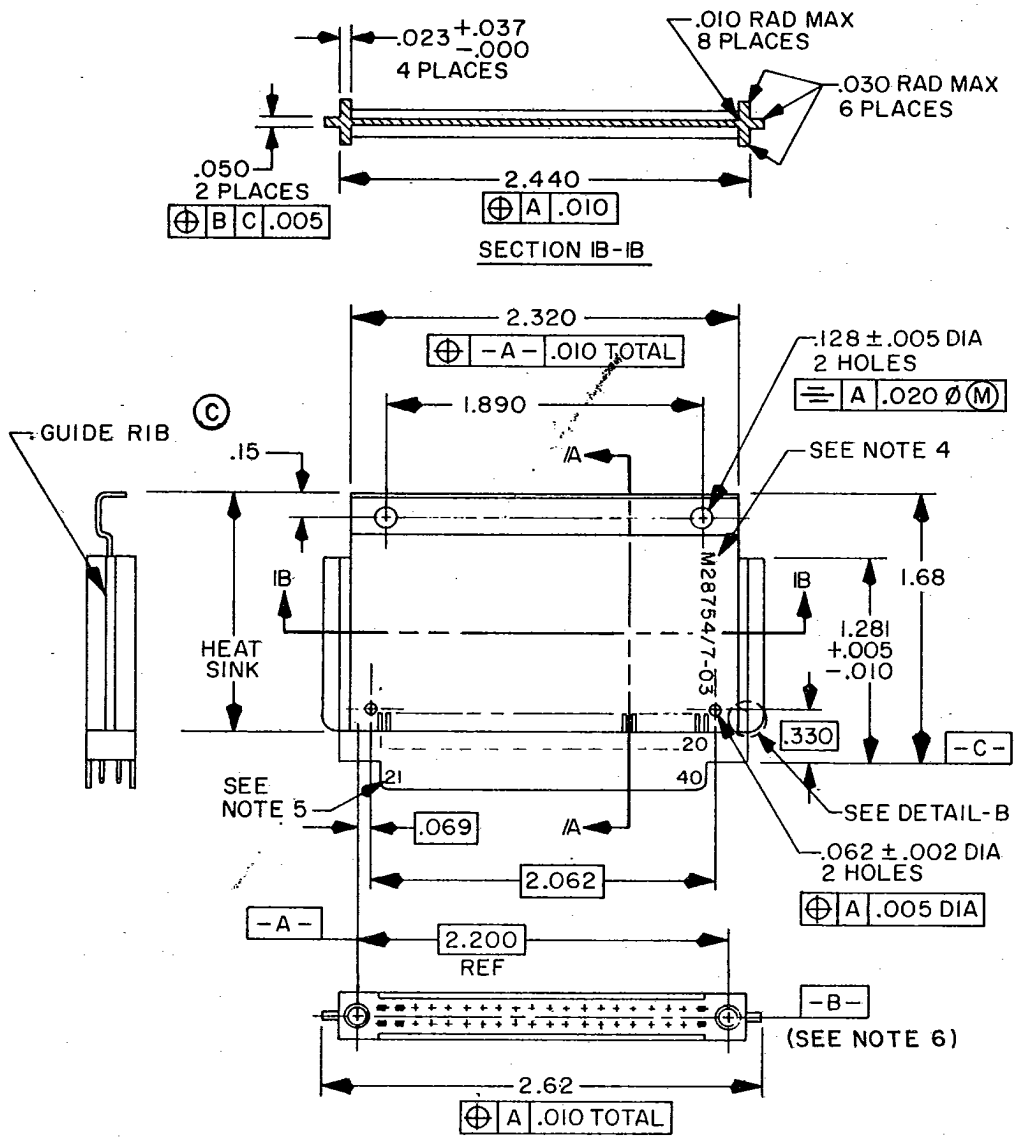



FIGURE 1. Dimensions and configurations.

Ⓒ denotes changes


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.

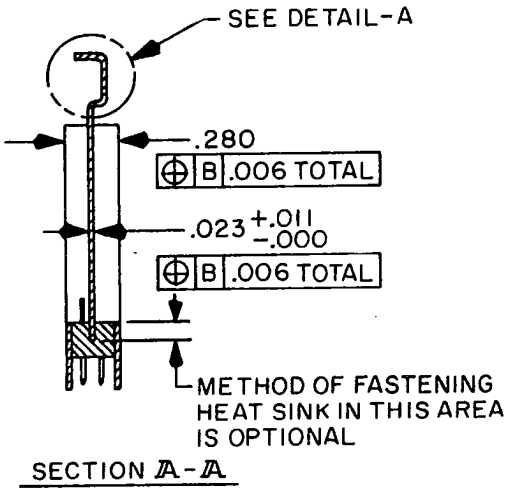

SECTION A-A

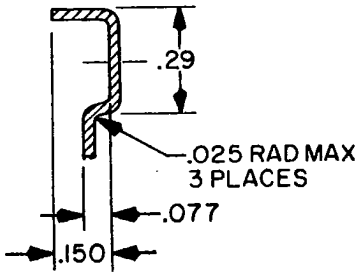

DETAIL-A
HEAT DISSIPATING FIN

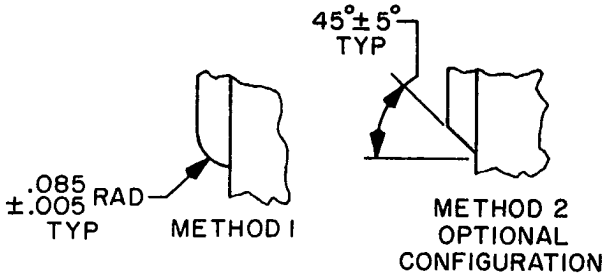

DETAIL-B

INCHES	MM	INCHES	MM
.002	.05	.114	2.90
.005	.13	.128	3.25
.006	.15	.15	3.8
.007	.18	.155	3.94
.010	.25	.280	7.11
.011	.28	.29	7.37
.015	.38	.330	8.38
.023	.58	1.281	32.54
.025	.64	1.530	38.86
.030	.76	1.68	42.67
.037	.94	1.890	48.01
.050	1.27	2.062	52.37
.062	1.57	2.200	55.88
.069	1.75	2.320	58.93
.077	1.96	2.440	61.98
.085	2.16	2.62	66.55

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 on 3 place decimals, ±.01 on 2 place decimals and ±2° on angles.
4. Mark in this area in white characters, .06 inch high marking can be vertical or horizontal. Marking positions optional within center section of heat sinks.
5. Contact number location dependent on connector used.
6. The line referred to as -B- designates a reference plane passing through the axis of the two keying pins.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Applicable connector: See table I.

Heat sink with guide ribs: Aluminum alloy, 3/4 hard in accordance with QQ-A-250. Surface finish anodized in accordance with MIL-A-8625, type II, class 2, black.

Marking: In accordance with MIL-C-28754 and figure 1.

Military part number: M28754/7- (dash number from table I).

Supersession data: This specification includes the requirements of drawing number 2300820, code identification number 10001 and drawing number 0102-664, code identification number 28687.

C TABLE I. Dash numbers and applicable connector.

Dash no.	Applicable connector	Description
02 1/	M28754/6-02	Contact tails on .100 centers
03 1/	M28754/10-01	Contact tails on .050 centers
04	M28754/6-04	Contact tails on .100 centers insulated pin shield
05	M28754/10-03	Contact tails on .050 centers insulated pin shield

1/ Inactive for new design. Use -04 and -05.

CAUTION: The supersession information is valid as of the date of this revision. The QPL associated with this inactive for new design note will be maintained until acquisition of the product is no longer required.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3266-7)

☆U.S. GOVERNMENT PRINTING OFFICE: 1983-605-034/655

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.