MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, 40 PIN, RIGHT ANGLE (FOR DIE CAST FRAME)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-28754.


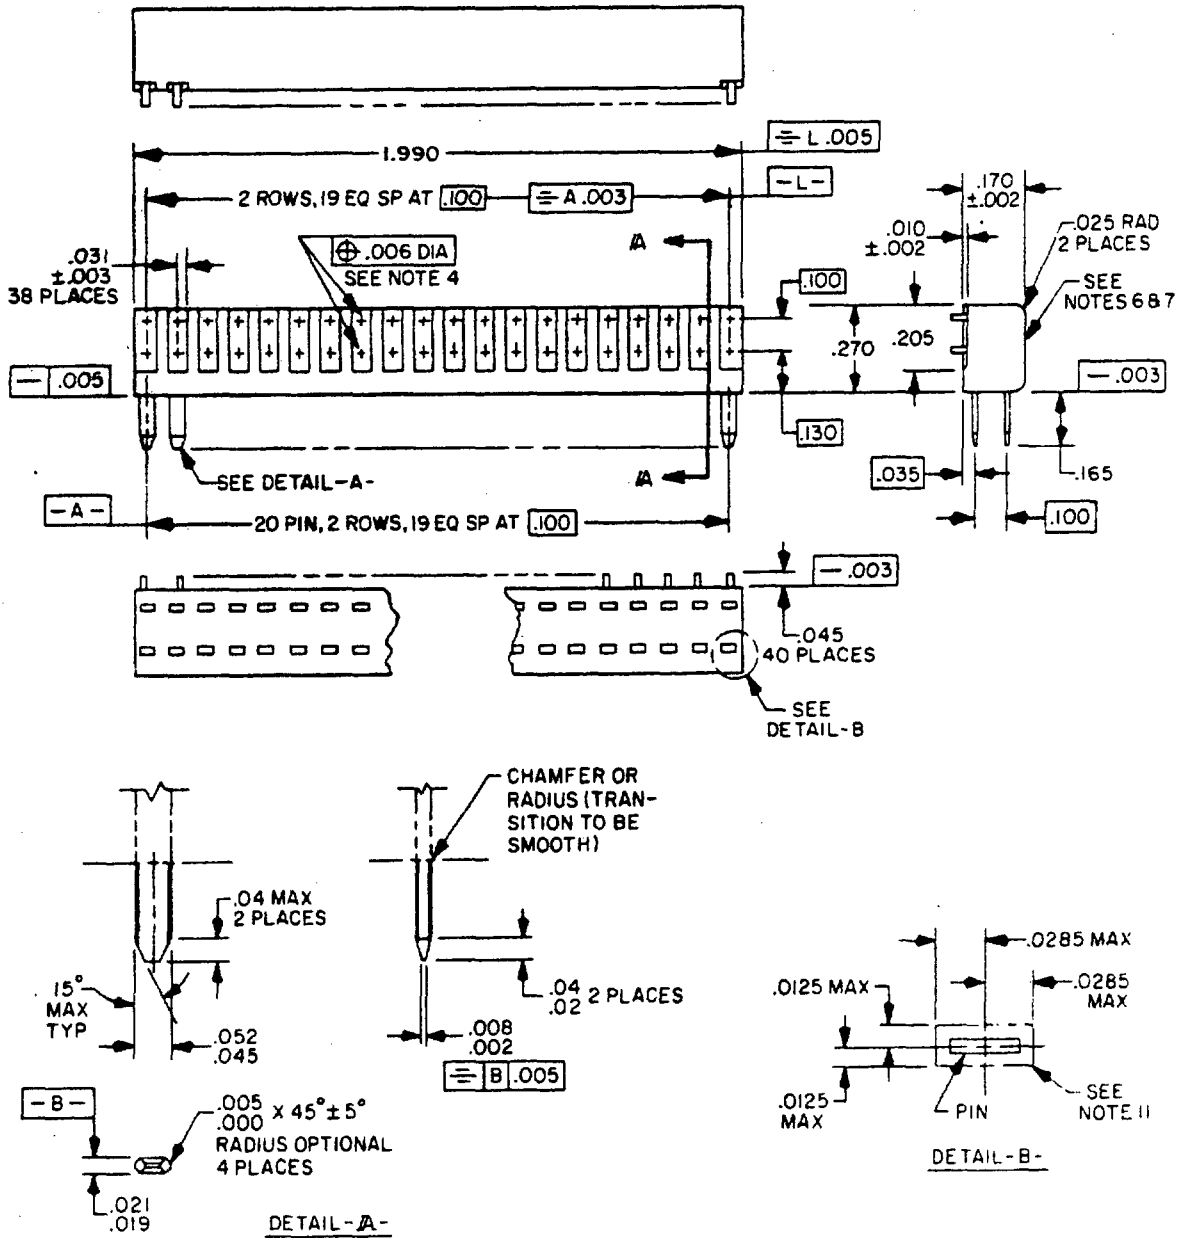


FIGURE 1. Dimensions and configurations.


Ⓑ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

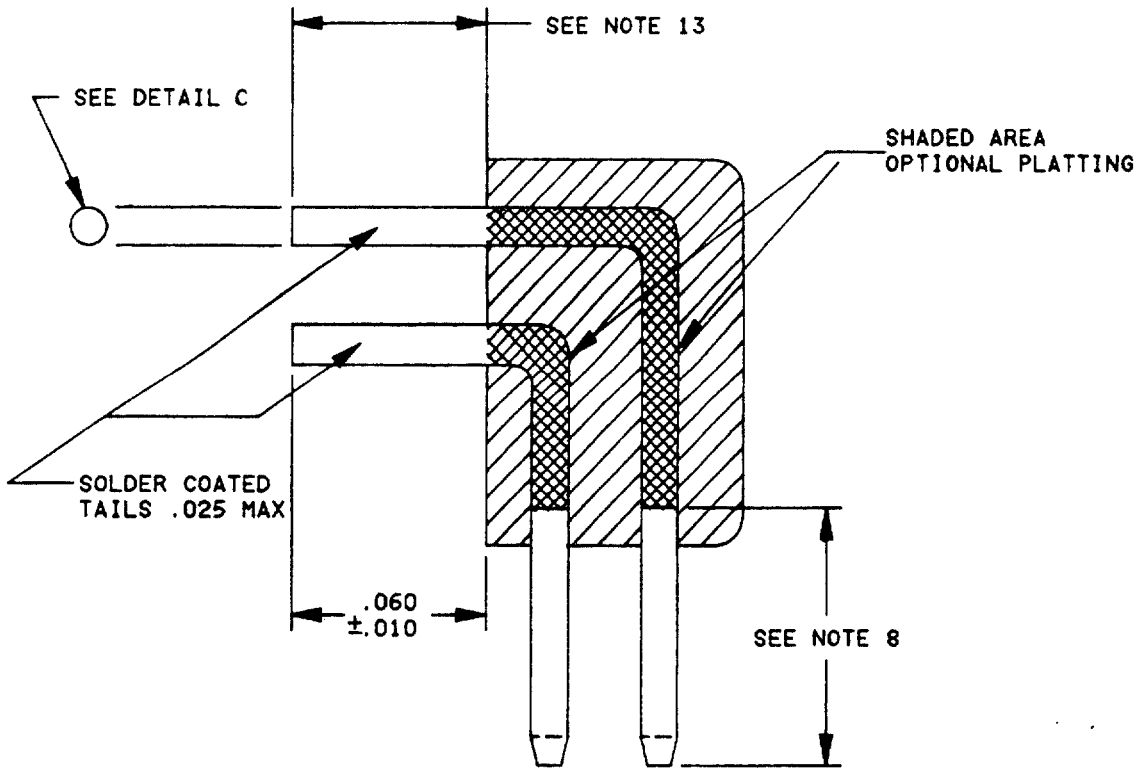

SECTION A-A

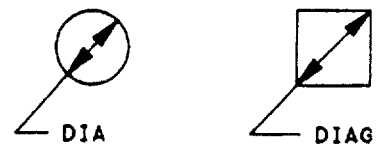

OPTIONAL CONFIGURATION
(SEE NOTE 12)
DETAIL C

Ⓑ FIGURE 1. Dimensions and Configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.002	.05	.031	.79
.003	.08	.035	.89
.005	.13	.038	.97
.006	.15	.04	1.02
.008	.20	.045	1.14
.010	.25	.052	1.32
.0125	.318	.062	1.57
.016	.41	.072	1.83
.019	.48	.100	2.54
.02	.51	.105	2.67
.021	.53	.130	3.30
.025	.64	.165	4.19
.0285	.724	.170	4.32
		1.990	50.55

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 on three place decimals and .01 on two place decimals and ±2° on angles.
4. +.006 diameter applies to exposed portion of contact tail only.
5. Flash around blade contacts not to exceed 0.010 from the body and shall be firmly attached.
6. Mark in this area on opposite side shown in figure in white character, .06 inch high.
7. The letters CONN are to be marked in white characters, .060 inch high and are to proceed the military part number but are not to be included in the part number.
8. Contacts shall be gold over nickle platted in accordance with MIL-C-28754 or a length of .170 min.
9. Break sharp edges .020 max unless otherwise specified.
10. Inside corners .020 max unless otherwise specified.
11. Pin must fall within this area. Dimensions given are taken about basic pin location.
12. Diameter or diagonal configuration is optional within .016 ±.003 before plating and .025 maximum after plating.
13. Tin lead solder shall completely cover contact from tip to body of connector from which the contact emerges.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Contacts: See figure 1.

(B) Plating: Contact plating shall be per MIL-C-28754. Solder coated contact tails shall be tinned (see view A-A) with solder to a thickness of 0.0005 inch to 0.003 inch and solder shall cover tails. Solder used shall be in accordance with QQ-S-571, type Sn60, form B, type S. A noncorrosive flux may be used per MIL-F-14256, type RMA.

Contact resistance: Voltage drop shall not exceed 20 millivolts.

Current rating: 3 amperes.

Solderability: In accordance with MIL-C-28754.

Temperature rating: -55°C to +105°C.

Voltage rating: 300 volts, ac (rms) at sea level.

Durability: Voltage drop shall not exceed 20 millivolts.

Marking: In accordance with MIL-C-28754 and figure 1.

Military part number: M28754/8-01.

Supersession data: This specification includes the requirements of drawing number 2315192, code identification number 10001.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3266-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.