MIL-C-28754/8C
1 October 1990
SUPERSEDING
MIL-C-28754/8B
13 DECEMBER 1982

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, 40 CONTACT, RIGHT ANGLE (FOR DIE CAST FRAME)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-20T14:32Z
Check the source to verify that this is the current version before use.

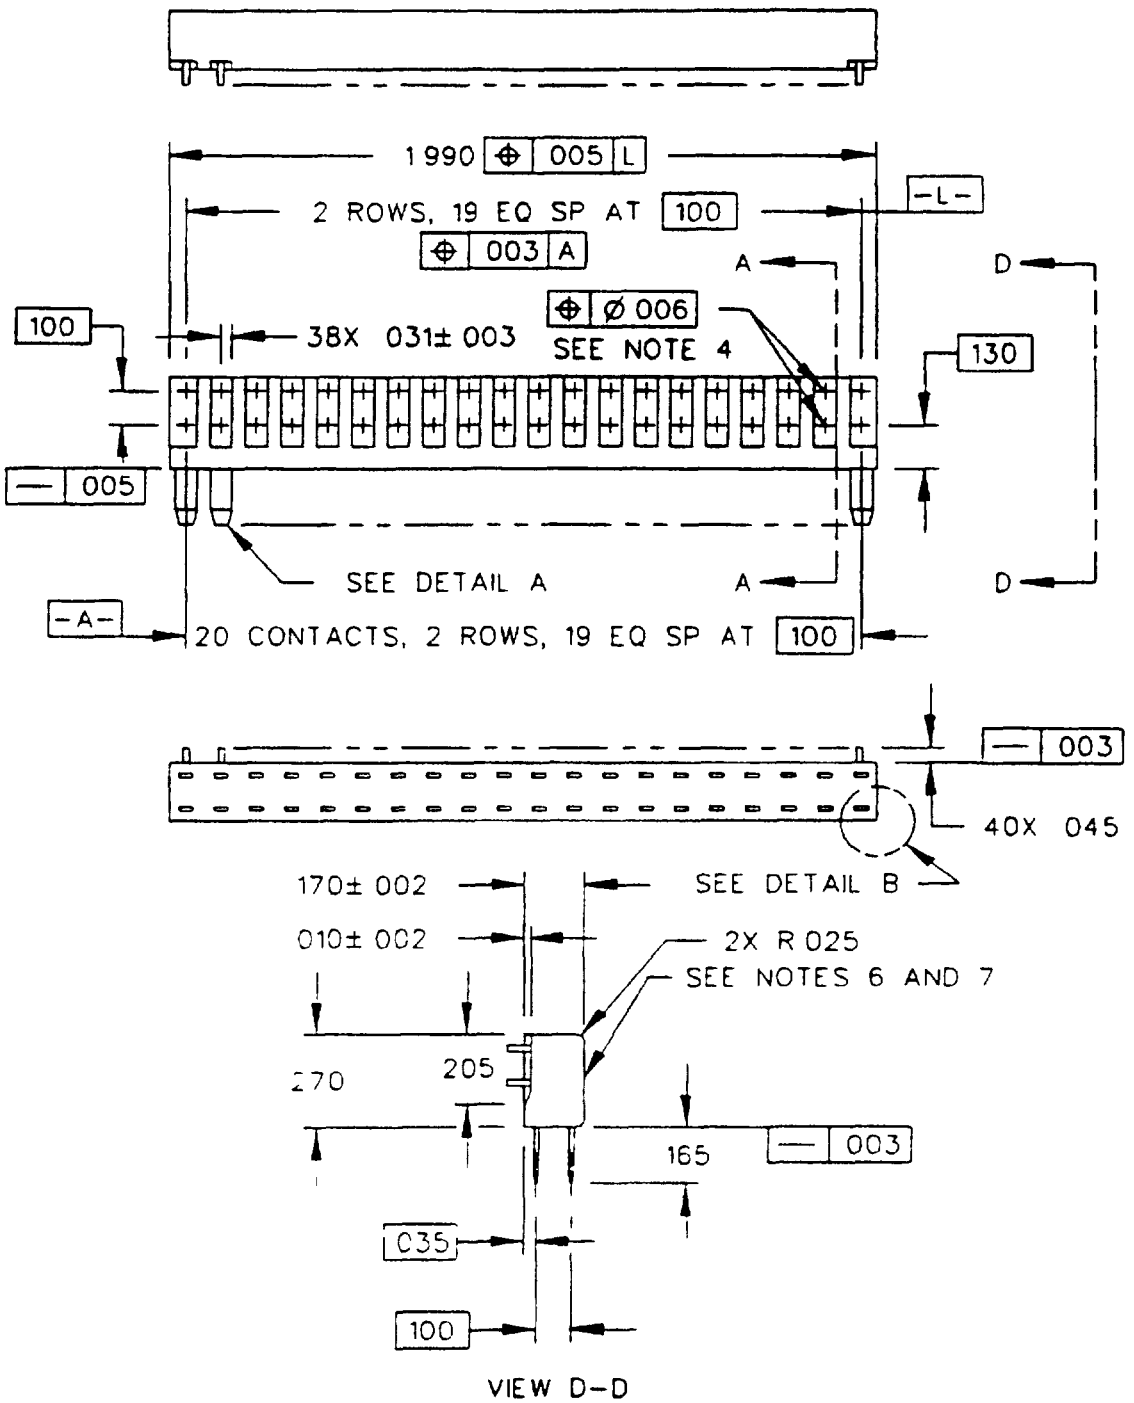


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

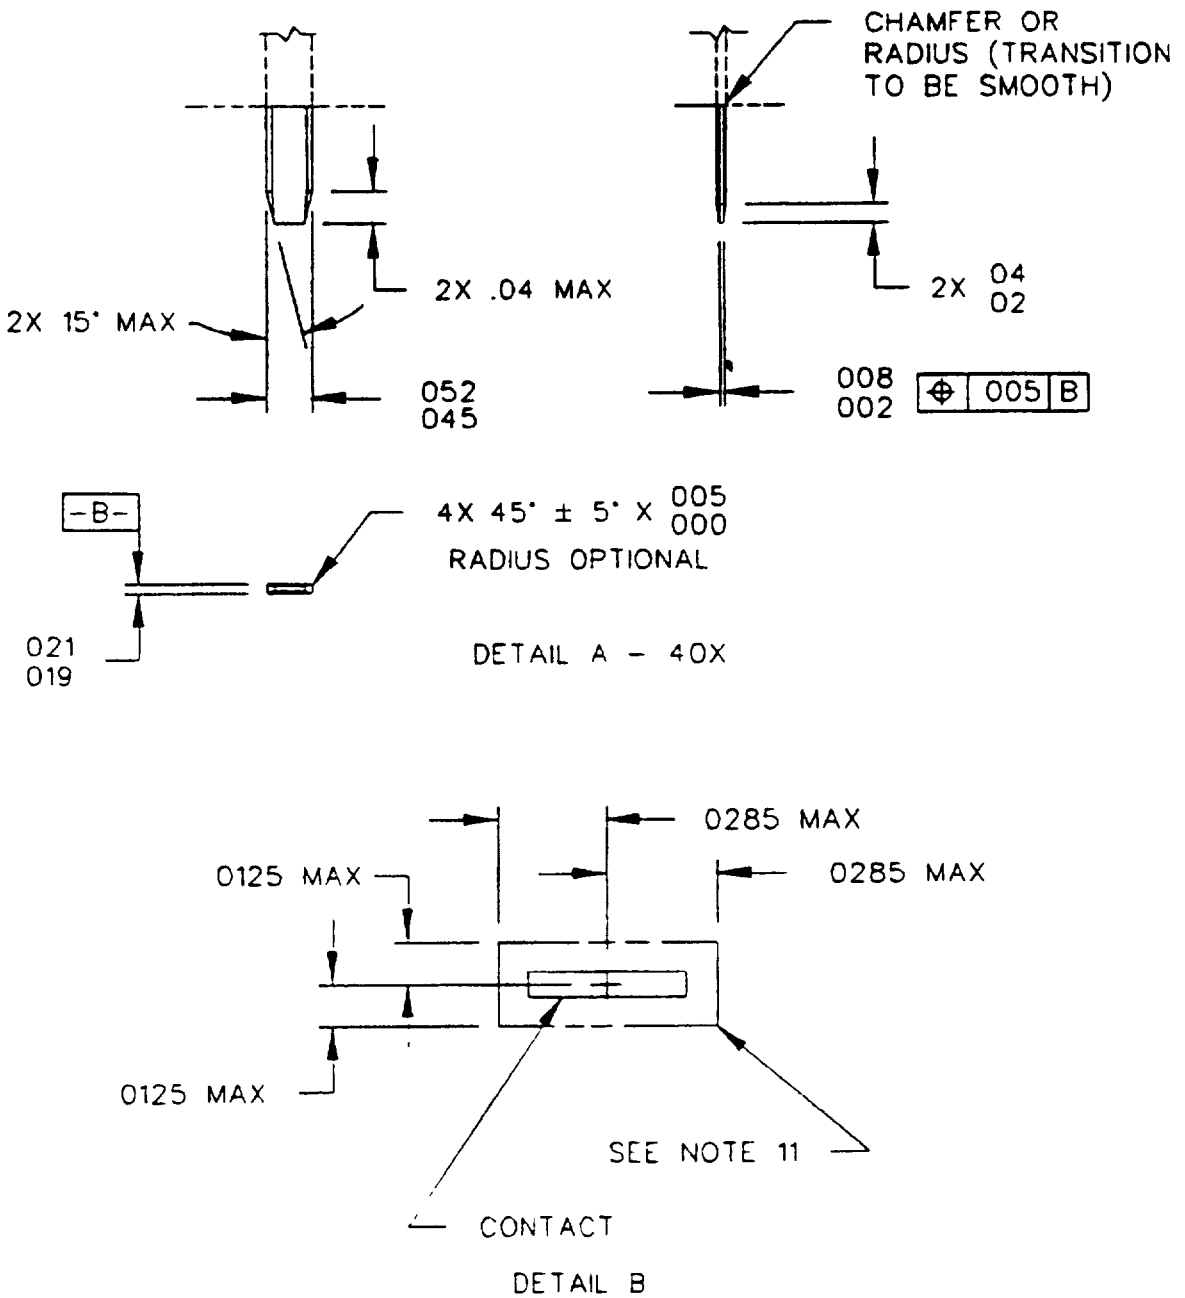


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-20T14:32Z
Check the source to verify that this is the current version before use.

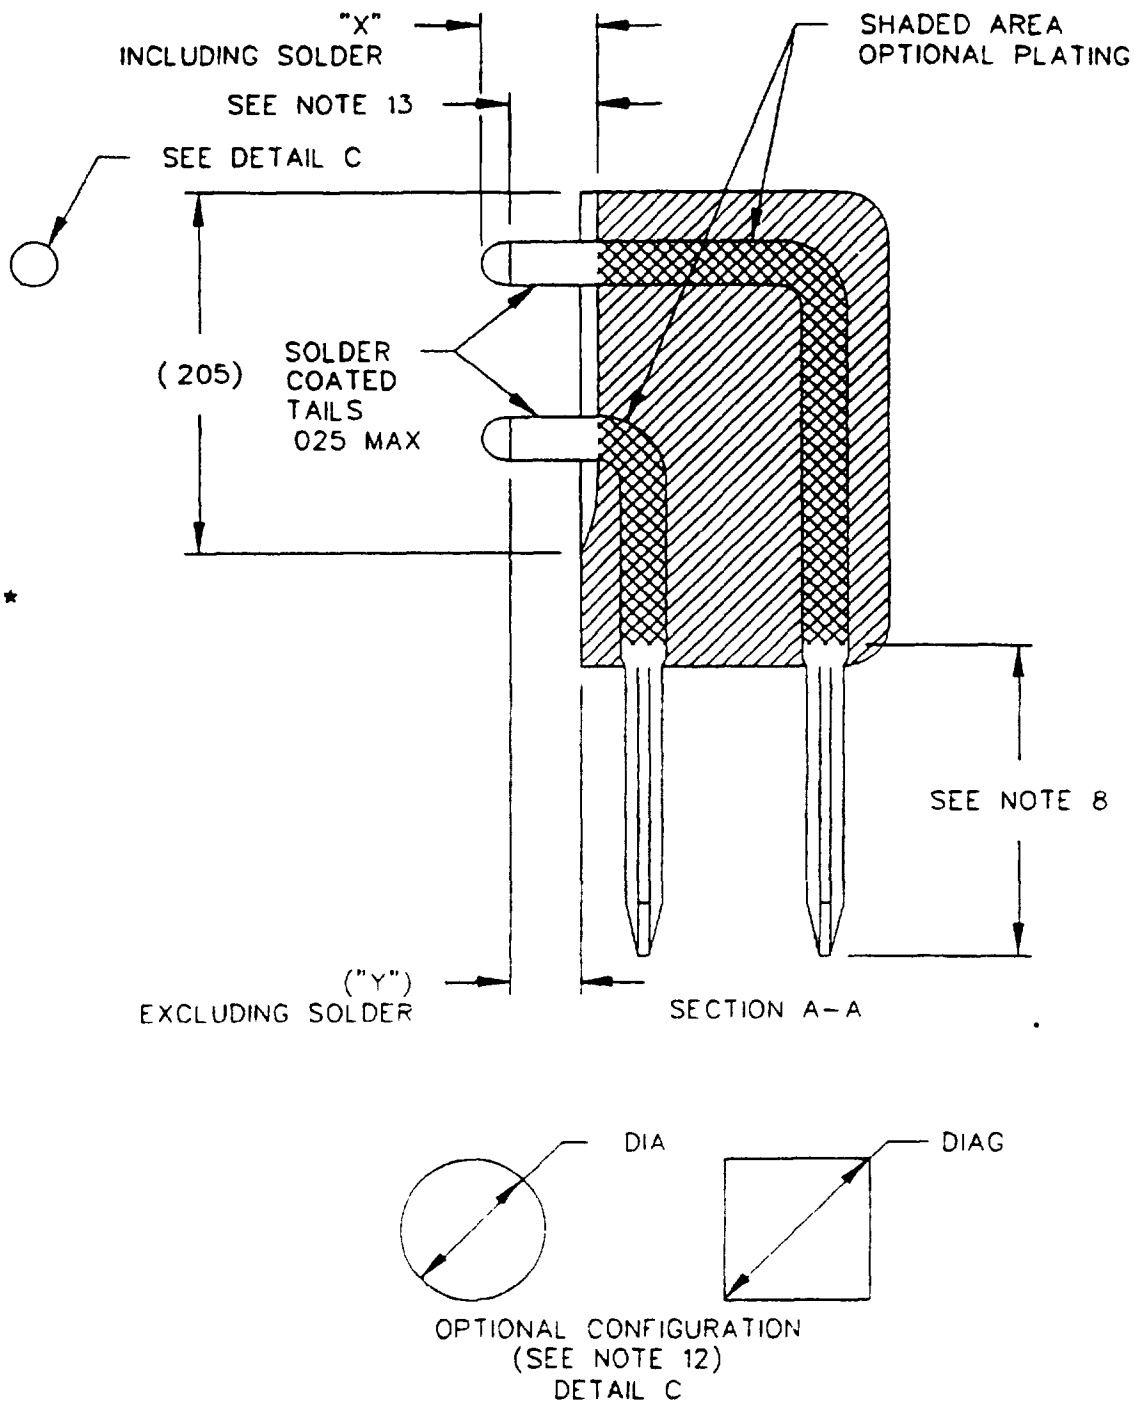


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
0.002	0.051	0.019	0.483	0.04	1.02	0.165	4.191
0.003	0.076	0.02	0.51	0.045	1.143	0.170	4.318
0.005	0.129	0.021	0.533	0.052	1.321	1.990	50.546
0.006	0.152	0.025	0.635	0.062	1.575		
0.008	0.203	0.0285	0.7239	0.072	1.829		
0.010	0.254	0.031	0.787	0.100	2.540		
0.0125	0.315	0.035	0.889	0.105	2.667		
0.016	0.406	0.038	0.965	0.130	3.302		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are plus or minus 0.005 inch (0.125 mm) on three place decimals, plus or minus 0.01 inch (0.25 mm) on two place decimals and plus or minus 2° on angles.
4. The 0.006 inch (0.152 mm) diameter applies to the exposed portion of the contact tail only.
5. The flash around the blade contacts is not to exceed 0.010 inch (0.254 mm) from the body and shall be firmly attached.
6. Mark in this area on the opposite side shown in the figure in white characters, 0.06 inch (1.52 mm) high.
7. The letters CONN are to be marked in white characters, 0.060 inch (1.52 mm) high and are to precede the military part number, but are not to be included in the part number.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

8. The contacts shall be gold over nickel plated in accordance with MIL-C-28754 for a length of 0.170 inch (4.318 mm) minimum.

9. Break sharp edges 0.020 maximum unless otherwise specified.

10. Inside corners 0.020 maximum unless otherwise specified.

11. Contact must fall within this area. Dimensions given are taken about basic contact location.

12. Diameter of diagonal dimension configuration is optional within 0.016 inch (0.406 mm) plus or minus 0.003 inch (0.076 mm) before plating and 0.025 inch (0.635 mm) maximum after plating.

13. Tin lead solder shall completely cover the contact from the tip to the body of the connector from which the contact emerges.

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Contacts: See figure 1.

Plating: Contact plating shall be per MIL-C-28754. Solder coated contact tails shall be tinned (see view A-A) with solder to a thickness of 0.0005 inch (0.013 mm) to 0.003 inch (0.08 mm) and solder shall cover tails. Solder used shall be in accordance with QQ-S-571, type Sn60, form B, type S. A noncorrosive flux may be used per MIL-F-14256, type RMA.

Contact resistance: Voltage drop shall not exceed 20 millivolts.

Current rating: 3 amperes.

Solderability: In accordance with MIL-C-28754.

Source: https://assist.dla.mil -- Downloaded: 20260-20T14:32Z
Check the source to verify that this is the current version before use.

Temperature rating: Minus 55 to plus 105°C.

Voltage rating: 300 volts, ac (rms) at sea level.

Durability: Voltage drop shall not exceed 20 millivolts.

Marking: In accordance with MIL-C-28754 and figure 1.

Military part number: M28754/8- (dash number from table I). *

TABLE I. Dash numbers and lead lengths.

Dash No	Y	X
-01	(.030)	.045 ±.005
-02	(.045)	.060 ±.010

*

Supersession data: This specification includes the requirements of drawing number 2315192, Code Identification Number 10001.

Qualifications testing: Perform the applicable tests as specified in MIL-C-28754 and the appendix thereto.

Extended qualifications: If qualifying both M28754/8-01 and M28754/8-02, qualification sample may be made of six samples of each design. *

Changes from previous issue: The margins of this specification sheet are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS

Agent:
NW

Preparing activity:
Navy - SH

(Project 5935-3770-01)

Source: https://assist.dla.mil -- Downloaded: 202610-20T14:32Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements All users of military standardization documents are invited to provide suggestions This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems Enter in block 6 any remarks not related to a specific paragraph of the document If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28754/8C	Connectors, Electrical, Modular, Type IV, Contact, Right Angle (For Die Cast Frame)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)* _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.