MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, DOUBLE SPAN, CONNECTOR ASSEMBLY, (DIP FRAME)

This limited coordination military specification has been prepared by the Naval Electronic Systems Command based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-C-28754/9. It is subject to modification. However, pending its promulgation as a coordinated military specification, it may be used in procurement.

The complete requirements for procuring the connector assembly described herein shall consist of this document and the latest issue of Specification MIL-C-28754.


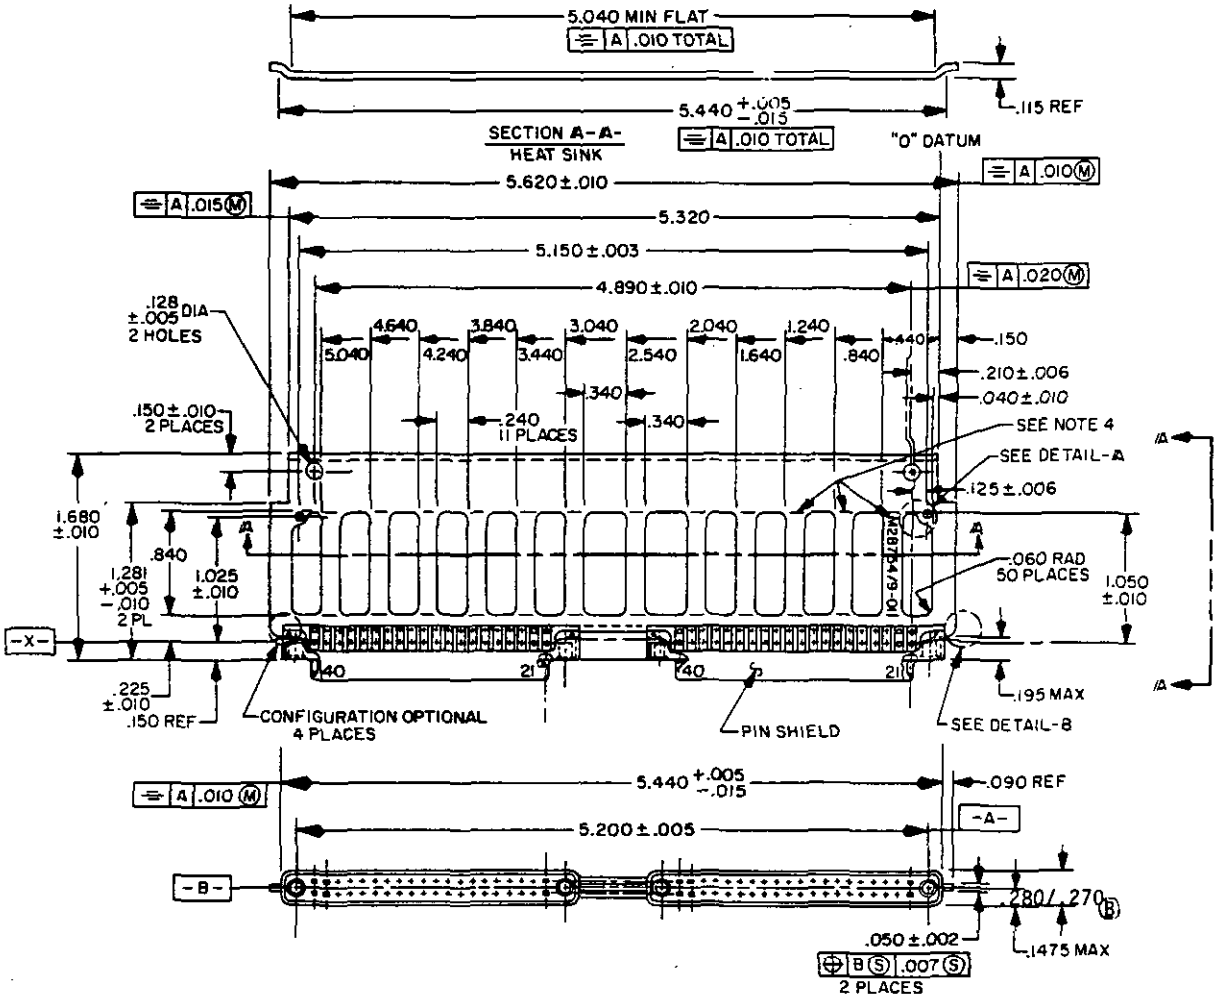


FIGURE 1. Dimensions and configurations.

(B) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

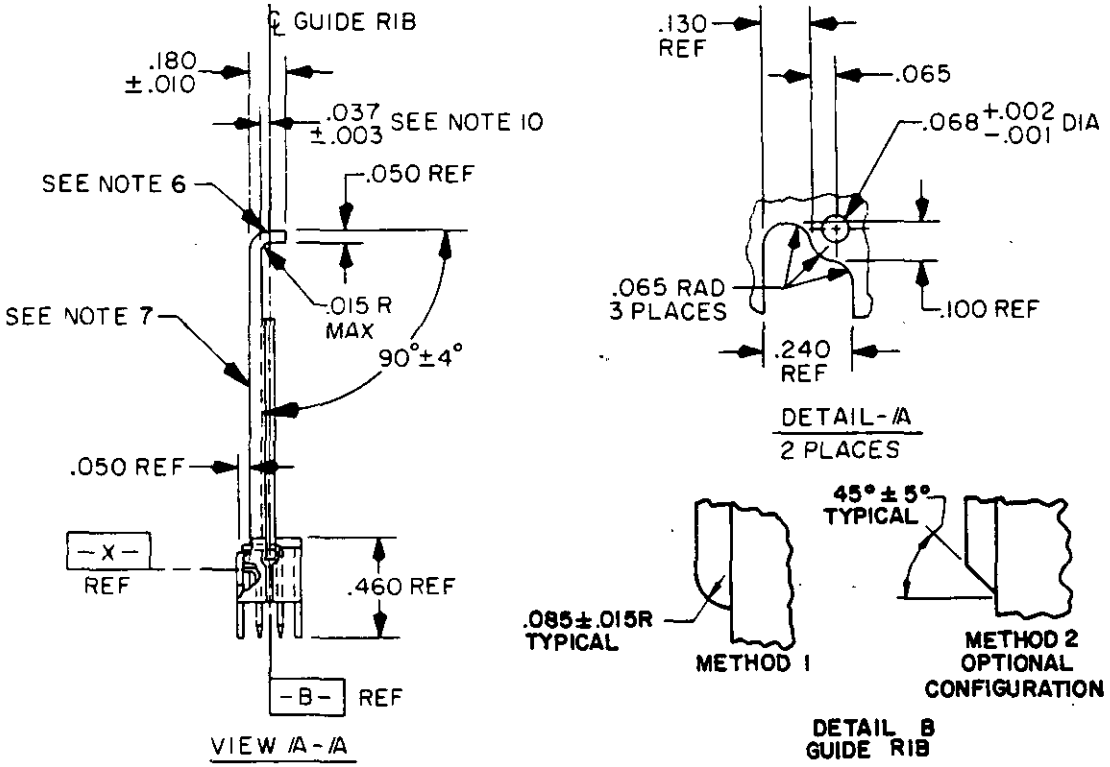

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.037	.94	.128	3.25	.340	8.64	3.040	77.22
.002	.05	.040	1.02	.130	3.30	.440	11.18	3.440	87.38
.003	.08	.050	1.27	.1475	3.746	.460	11.68	3.840	97.54
.004	.10	.06	1.5	.150	3.81	.840	21.34	4.240	107.70
.005	.13	.060	1.52	.180	4.57	1.025	26.04	4.640	117.86
.006	.15	.065	1.65	.195	4.95	1.050	26.67	4.890	124.21
.007	.18	.068	1.73	.210	5.33	1.240	31.50	5.040	128.02
.010	.25	.085	2.16	.225	5.72	1.281	32.54	5.150	130.81
.01	.3	.090	2.29	.240	6.10	1.640	41.66	5.200	132.08
.015	.38	.100	2.54	.270	6.86	1.680	42.67	5.320	135.13
.020	.51	.115	2.92	.280	7.11	2.040	51.82	5.440	138.18
.030	.76	.125	3.18	.290	7.37	2.540	64.52	5.620	142.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.
4. Marking, this area in white characters, .06 inch high.
5. Frame surface to be flush with connector within $^{+.007}_{-.004}$.
6. Top surface of the fin shall be flat for a minimum .090 inch width along the total length.
7. Frame shall be flat within .006 T.I.R. In area described by section "A-A".
8. Frame to be perpendicular to connector mating interface with +.005 (solder tail side) -.010 (opposite side).
9. Datum -B- is established by a plane passing through the center of the keying pin holes located by the 5.200 ±.005 dimension.
10. The .037 ±.003 dimension are measured from the Guide Rib Centerline.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Frame: Aluminum alloy 5052, H34, H32, in accordance with QQ-A-250/8. Anodized black in accordance with MIL-A-8625, type II, class 2.

Marking: In accordance with MIL-C-28754 and figure 1.

(B) Military part number: M28754/9-(Dash number from Table I).

Supersession data: This specification includes the requirements of drawing number 0102-660, code identification number 28687.

TABLE I. Part number and applicable connector.

Part number	Applicable connector	Description
01	M28754/11-01	Uninsulated pin shield
02	M28754/11-02	Insulated pin shield

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-N185-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.