
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, DOUBLE SPAN, CONNECTOR ASSEMBLY, (DIP FRAME)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector assemblies described herein shall consist of this specification and the latest issue of MIL-C-28754.

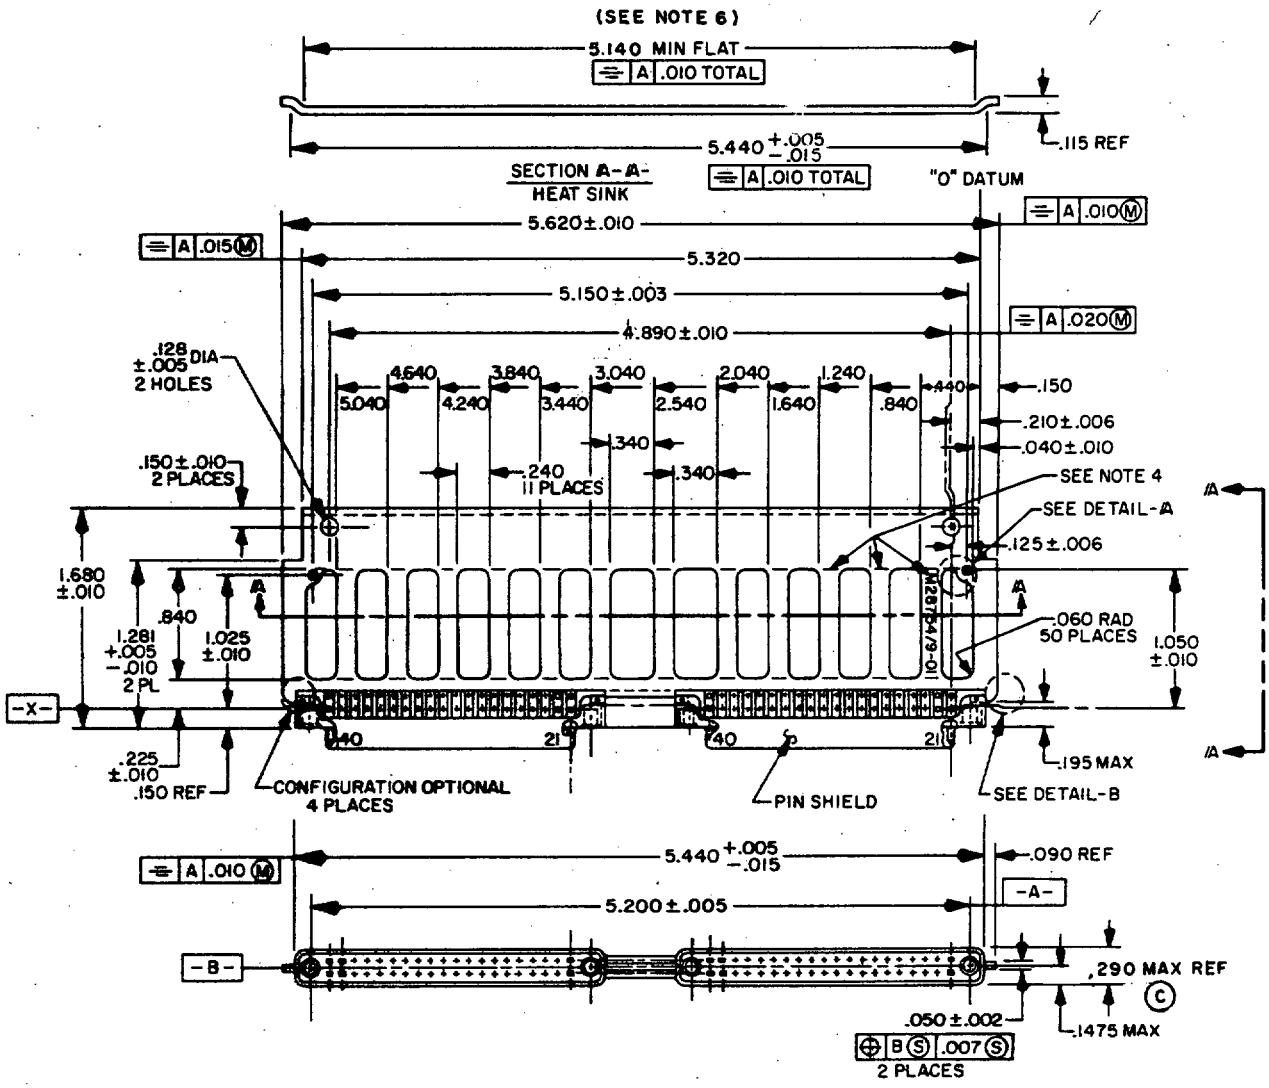


C FIGURE 1. Dimensions and configurations (-01 and -02).

C denotes changes


FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

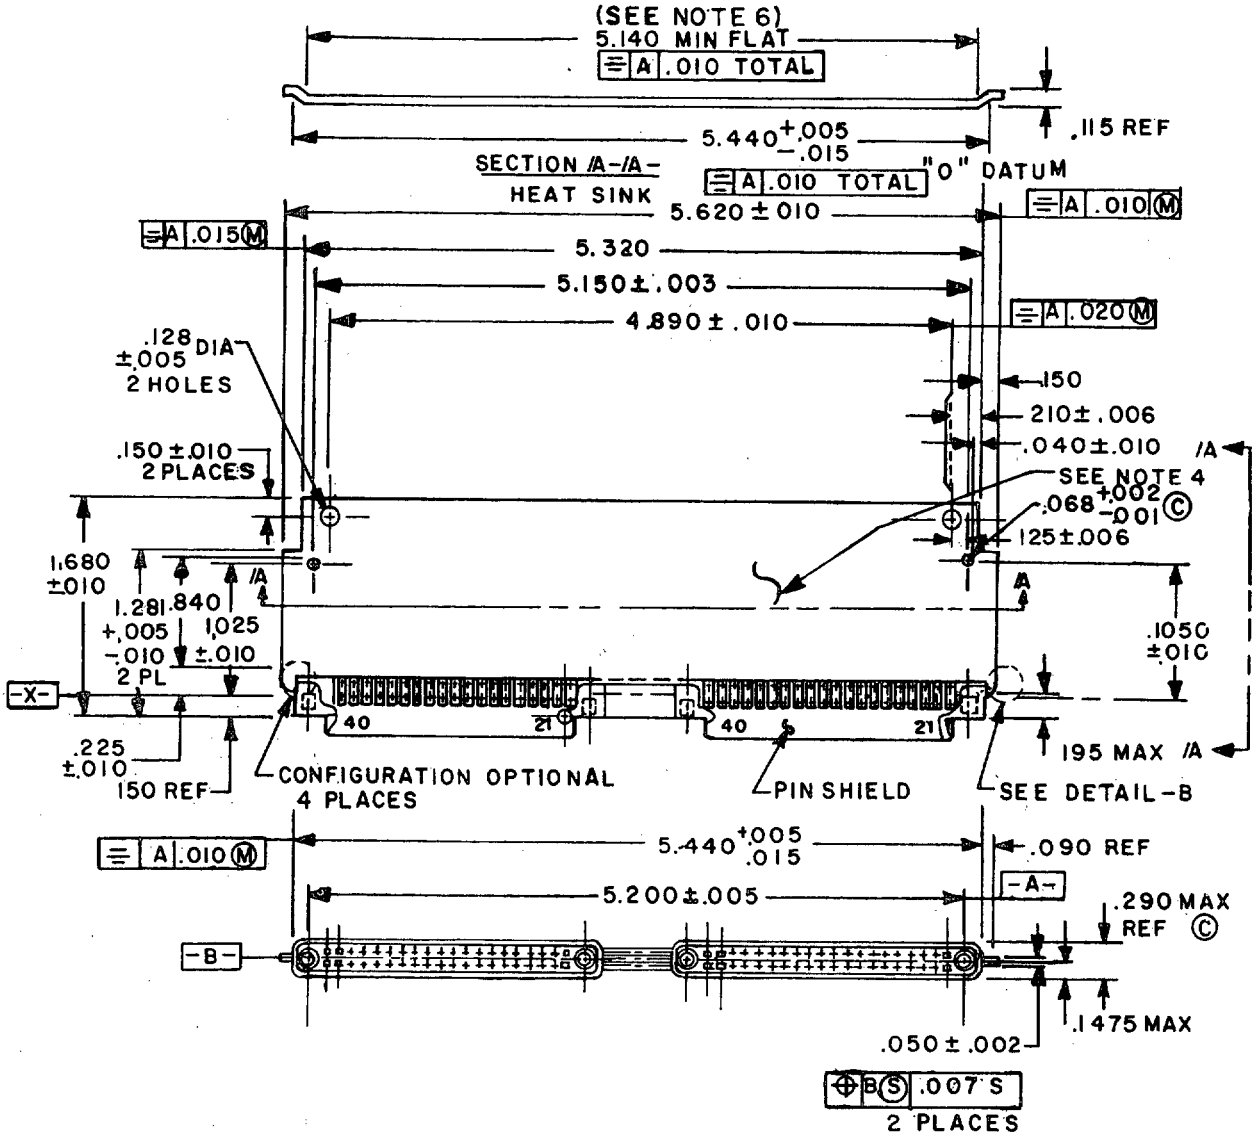

C FIGURE 1. Dimensions and configurations (-03) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

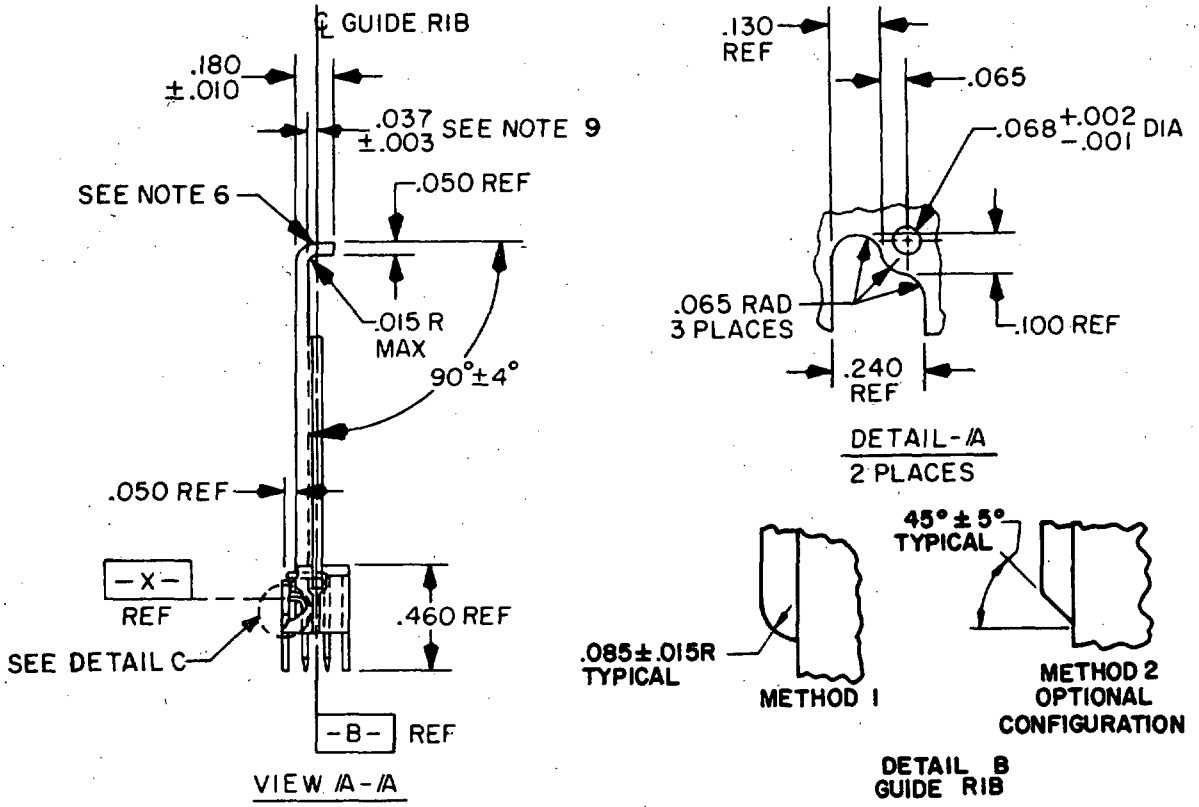


INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.037	.94	.128	3.25	.340	8.64	3.040	77.22
.002	.05	.040	1.02	.130	3.30	.440	11.18	3.440	87.38
.003	.08	.050	1.27	.1475	3.746	.460	11.68	3.840	97.54
.004	.10	.06	1.5	.150	3.81	.840	21.34	4.240	107.70
.005	.13	.060	1.52	.180	4.57	1.025	26.04	4.640	117.86
.006	.15	.065	1.65	.195	4.95	1.050	26.67	4.890	124.21
.007	.18	.068	1.73	.210	5.33	1.240	31.50	5.040	128.02
.010	.25	.085	2.16	.225	5.72	1.281	32.54	5.150	130.81
.01	.3	.090	2.29	.240	6.10	1.640	41.66	5.200	132.08
.015	.38	.100	2.54	.270	6.86	1.680	42.67	5.320	135.13
.020	.51	.115	2.92	.280	7.11	2.040	51.82	5.440	138.18
.030	.76	.125	3.18	.290	7.37	2.540	64.52	5.620	142.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.
4. Mark in this area in white characters, .06 inch high.
5. Top surface of the fin shall be flat for a minimum .090 inch width along the total length.
6. Frame shall be flat within .006 T.I.R. in area described by section "A-A".
7. Frame to be perpendicular to connector mating interface with +.005 (solder tail side) -.010 (opposite side).
8. Datum -B- is established by a plane passing through the center of the keying pin holes located by the 5.200 ±.005 dimension.
9. The .037 ±.003 dimension are measured from the Guide Rib Centerline.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

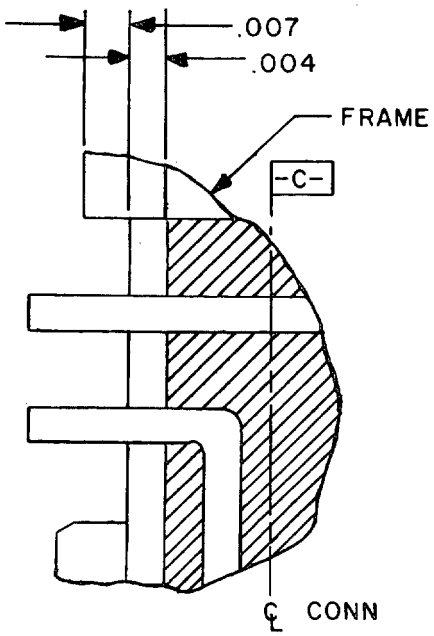

DETAIL C

© FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Frame: Aluminum alloy 5052, H34, H32, in accordance with QQ-A-250/8. Anodized black in accordance with MIL-A-8625, type II, class 2.

Marking: In accordance with MIL-C-28754 and figure 1.

© Military part number: M28754/9- (dash number from table I).

Supersession data: This specification includes the requirements of drawing number 0102-660, code identification number 28687.

TABLE I. Part numbers and applicable connector.

Part no.	Applicable connector	Description
01 1/	M28754/11-01	Uninsulated pin shield
02	M28754/11-02	Insulated pin shield
03	M28754/11-02	Insulated pin shield

1/ Inactive for new design use -02 for new design.

CAUTION: The supersession information is valid as of the date of this revision. The QPL associated with this inactive for new design note will be maintained until acquisition of the product is no longer required.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3266-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.