INCH-POUND

MIL-C-28754/9D
26 July 1991
SUPERSEDING
MIL-C-28754/9C
13 DECEMBER 1982

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, DOUBLE SPAN, CONNECTOR ASSEMBLY, (DIP FRAME)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the frame-connector assembly described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754. *

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

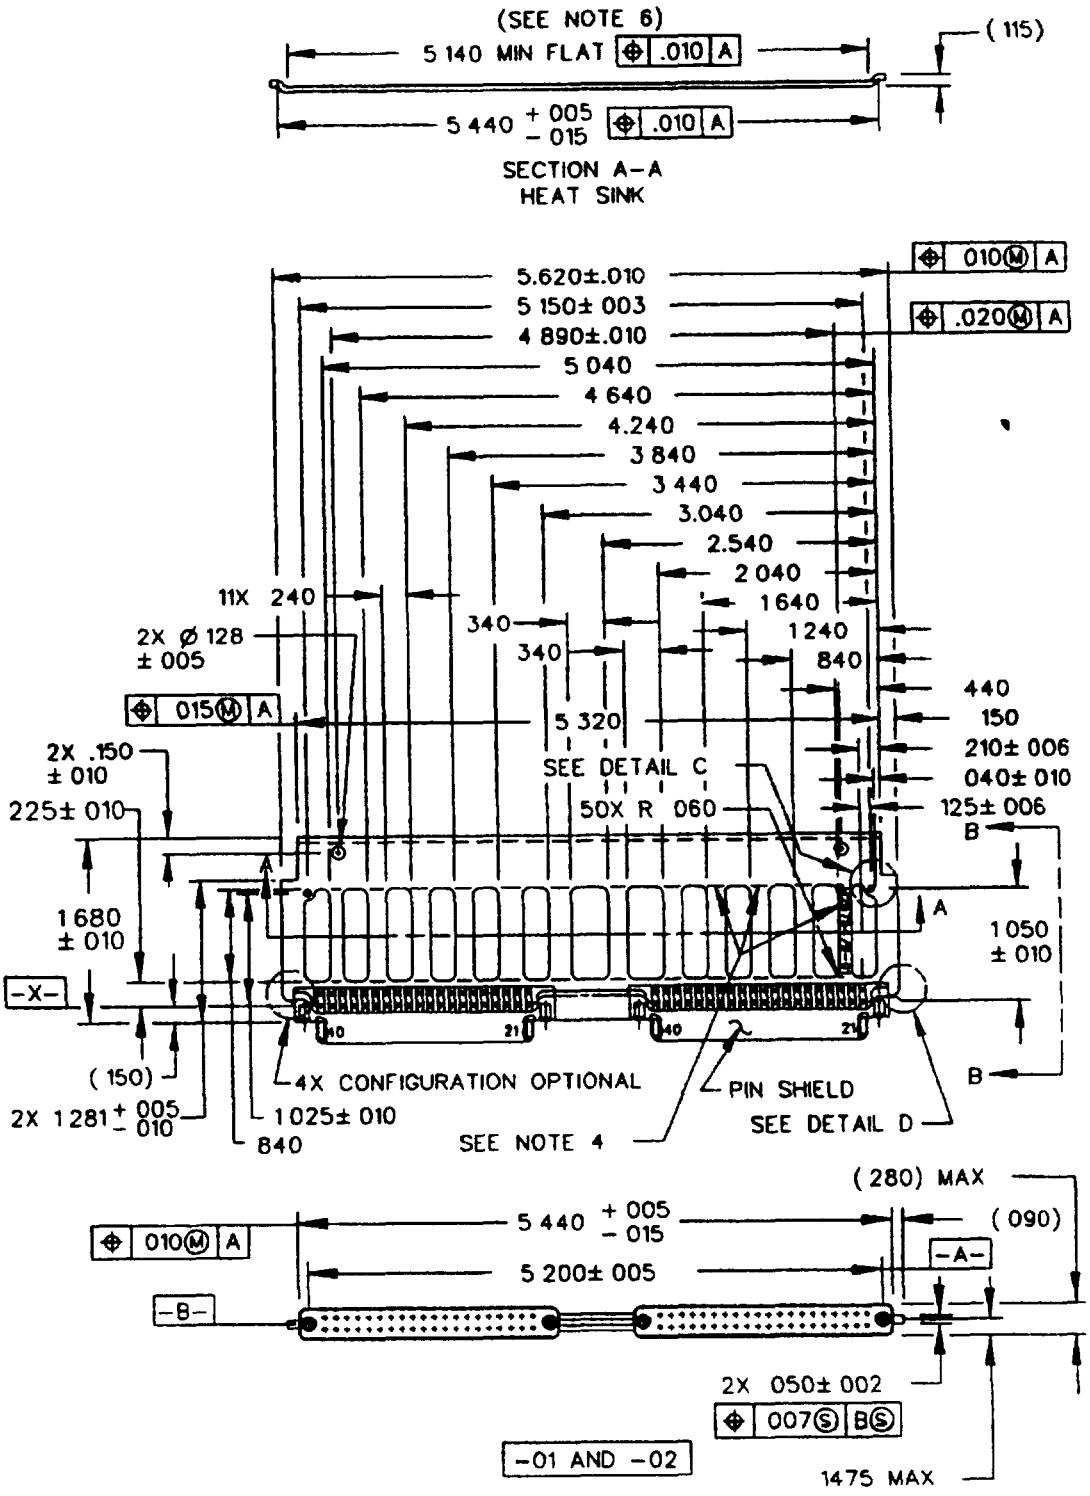


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

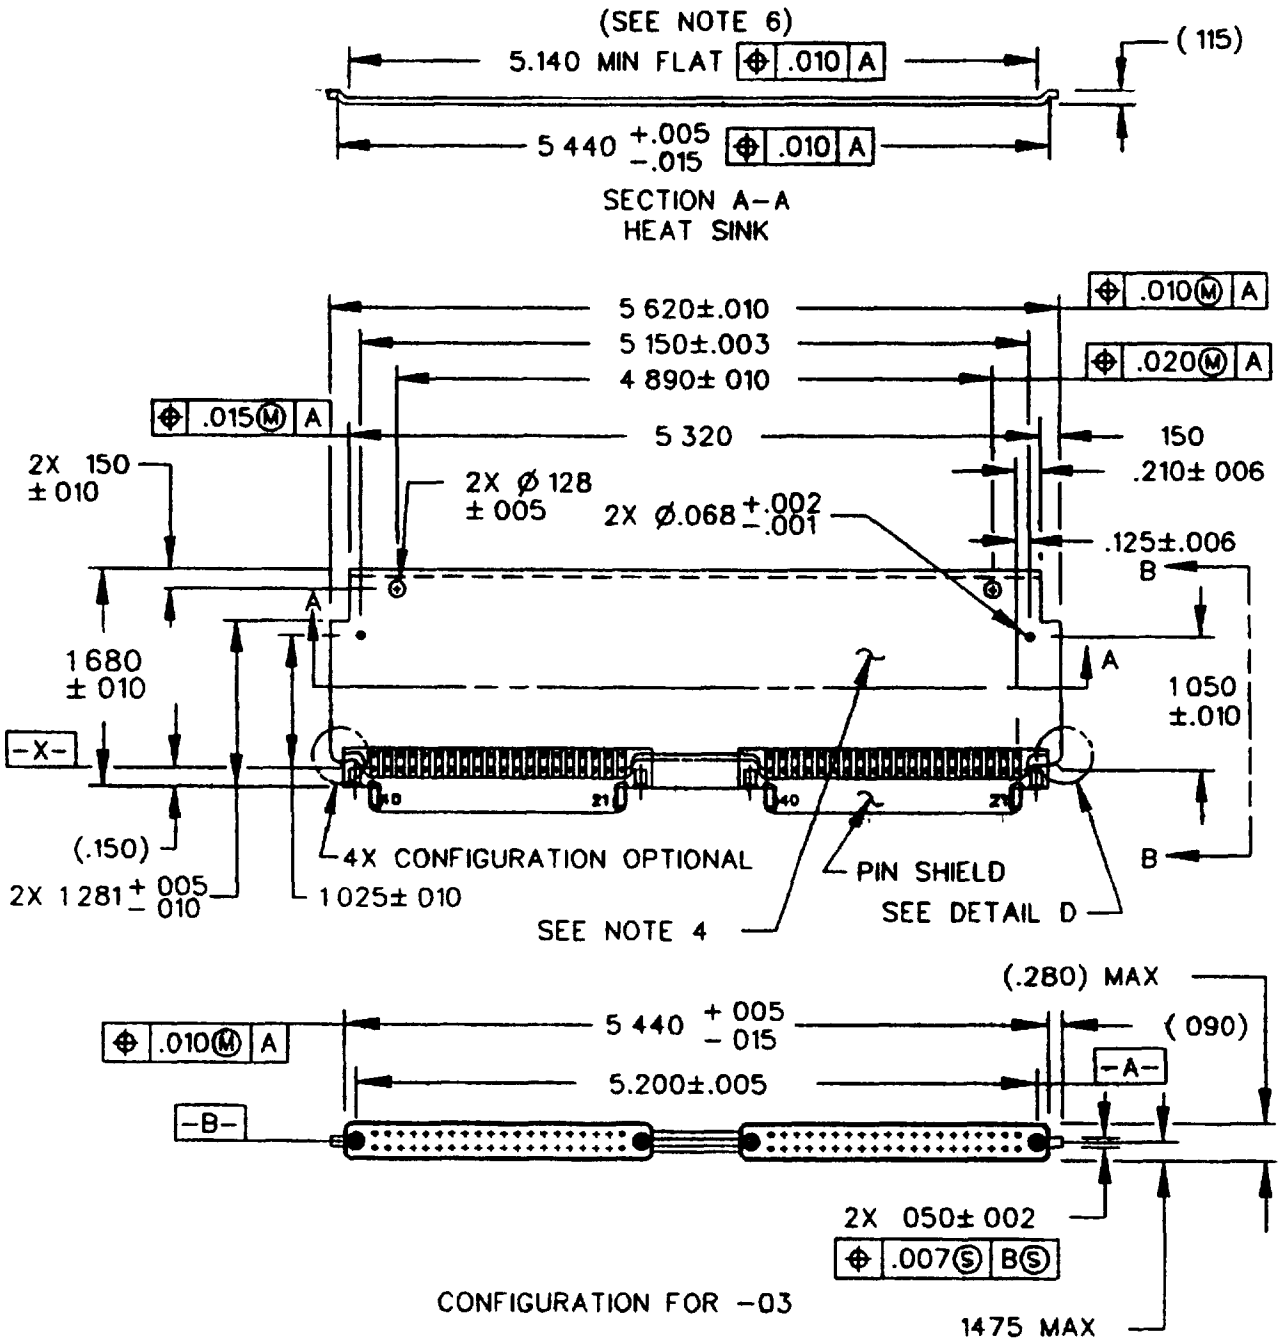


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.


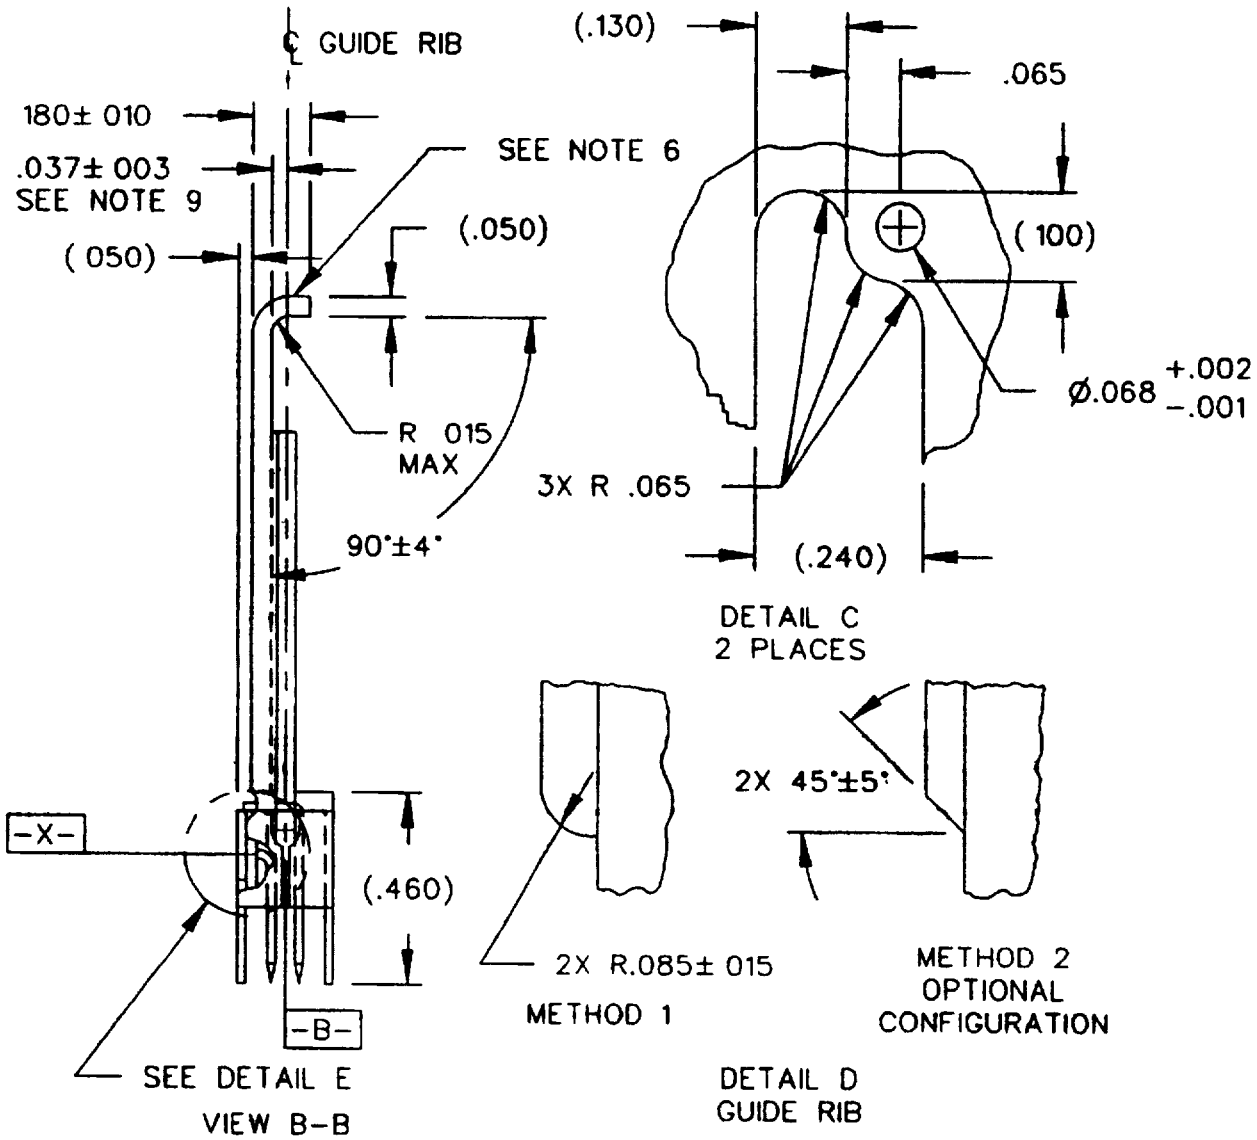


FIGURE 1. Dimensions and configurations - Continued. *

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

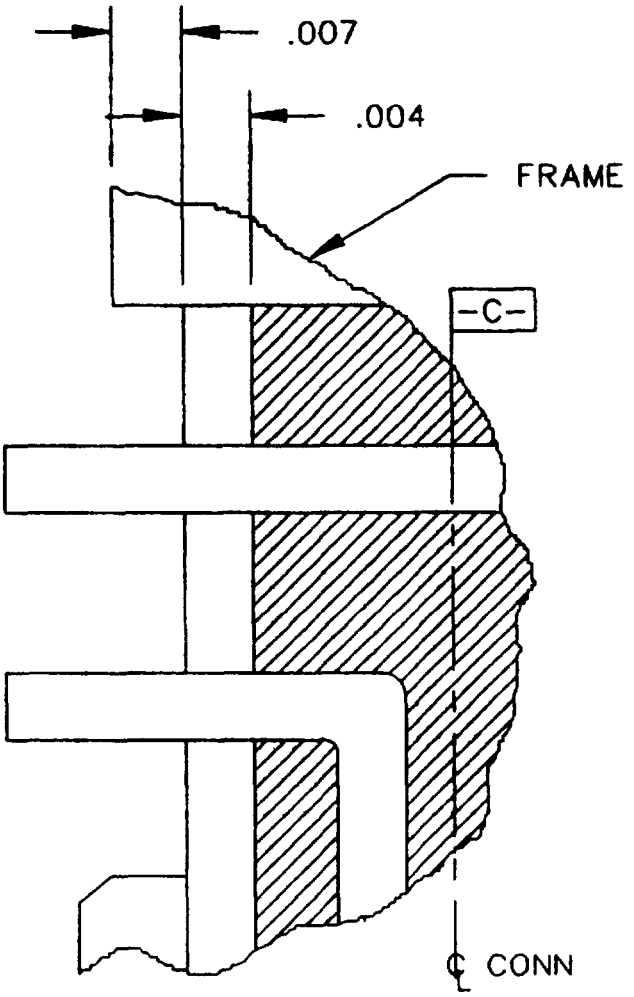

DETAIL E

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
0.001	0.03	0.060	1.52	0.270	6.86	3.440	87.38
0.002	0.05	0.065	1.65	0.280	7.11	3.840	97.54
0.003	0.08	0.068	1.73	0.290	7.37	4.240	107.70
0.004	0.10	0.085	2.16	0.340	8.64	4.640	117.86
0.005	0.13	0.090	2.29	0.440	11.18	4.890	124.21
0.006	0.15	0.100	2.54	0.460	11.68	5.040	128.02
0.007	0.18	0.115	2.92	0.840	21.34	5.150	130.81
0.010	0.25	0.125	3.18	1.025	26.04	5.200	132.08
0.01	0.3	0.128	3.25	1.055	26.67	5.320	135.13
0.015	0.38	0.130	3.30	1.240	31.50	5.440	138.18
0.020	0.51	0.1475	3.746	1.281	32.54	5.620	142.75
0.030	0.76	0.150	3.81	1.640	41.66		
0.037	0.94	0.180	4.57	1.680	42.67		
0.040	1.02	0.210	5.33	2.040	51,82		
0.050	1.27	0.225	5.72	2.540	64.52		
0.06	1.5	0.240	6.10	3.040	77.22		

NOTES:

1. Dimensions are in inches.

2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

3. Unless otherwise specified, tolerances are plus or minus 0.005 inch (0.13 mm) on three place decimals, plus or minus 0.01 inch (0.3 mm) on two place decimals and plus or minus 2° on angles.

4. Mark in this area in white characters, 0.06 inch (1.5 mm) high.

5. Top surface of the fin shall be flat for a minimum 0.090 inch (2.29 mm) width along the total length.

6. Frame shall be flat within 0.006 inch (0.15 mm) TIR in area described by section A-A.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

7. The frame shall be perpendicular to connector mating interface with plus 0.005 inch (0.13 mm) (solder tail side) minus 0.010 inch (0.25 mm) (opposite side).

8. Datum -B- is established by a plane passing through the center of the keying pin holes located by the 5.200 inch (132.08 mm) dimension.

9. The 0.037 inch (0.94 mm) plus or minus 0.003 inch (0.08 mm) dimension are measured from the Guide Rib Centerline.

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Frame: Aluminum alloy 5052, H34, H32, in accordance with QQ-A-250/8. Anodized black in accordance with MIL-A-8625, type II, class 2.

Marking: In accordance with MIL-C-28754 and figure 1.

Military part number: M28754/9- (dash number from table I).

TABLE I. Dash numbers and applicable connector.

Dash no.	Applicable connector	Description
01 1/	M28754/11-01	Uninsulated pin shield
02	M28754/11-02	Insulated pin shield
03	M28754/11-02	Insulated pin shield
04	M28754/11-03	Insulated pin shield

NOTE:
1/ Inactive for new design; use -02 for new design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

Caution: The supersession information is valid as of the date of this revision. The Qualified Products List (QPL) associated with this inactive for new design item will be maintained until acquisition of the product is no longer required. *

Supersession data: This specification includes the requirements of drawing number 0102-660, Code Identification Number 28687.

Qualifications testing: Perform the applicable tests as specified in MIL-C-28754 and the appendix thereto. *

Extended qualifications: Qualification of M28754/9-01, /9-02, or /9-03 extends qualifications to other products as specified in the appendix to MIL-C-28754. *

Changes from previous issue: The margins of this specification sheet are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Preparing activity: *
Navy - SH

(Project 5935-3770-02)

Review activities:
Navy - MC
Air Force - 11, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS

Agent:
NW *

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-28754/9D	

3. DOCUMENT TITLE Connectors, Electrical, Modular, Type IV, Double Span, Connector Assembly, (Dip Frame)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Technical Point of Contact (TPOC): Mr. Robert F. Dilger (Code 602A) PLEASE ADDRESS ALL CORRESPONDENCE AS FOLLOWS:	TPOC: 812-854-1528	88-482-1528
c. ADDRESS (Include Zip Code) Commanding Officer Naval Weapons Support Center ATTN: Robert F. Dilger, Bldg. 2940W, Code 602A Crane, Indiana 47522-5060	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:32Z
Check the source to verify that this is the most current version before use.