INCH-POUND

MIL-PRF-93/20D
1 July 2021
SUPERSEDING
MIL-R-93/20C
w/ Amendment 2
24 June 2013

PERFORMANCE SPECIFICATION SHEET

RESISTOR, FIXED, WIRE WOUND (ACCURATE),

STYLE RB71

INACTIVE FOR NEW DESIGN AFTER 22 NOVEMBER 1968.
USE MIL-PRF-39005/6.

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

* The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-93.

1. SCOPE

1.1 Scope. This specification covers the requirements for style RB71, accurate, wire wound, fixed resistors.

1.2 Part or Identifying Number (PIN). Resistors covered by this specification are identified by a PIN which consists of the style of this specification and a coded number. The PIN is in the following form:

RB71	CE12701D
Specification style number	Coded number

2 APPLICABLE DOCUMENTS

* 2.1 General. The documents listed in this section are specified in sections 3 and 4 of the specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Comments, suggestions, or questions on this document should be addressed to: DLA Land and Maritime, ATTN: VAT, Post Office Box 3990, Columbus Ohio 43218-3990, or emailed to resistor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 5905

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:52Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

* DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-93 - Resistor, Fixed, Wire Wound, (Accurate), General Specification for

* (Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document, and the references cited herein (except for related associated specifications, specification sheets, or MS sheets) the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

* 3.1 General. The requirements for acquiring the product described herein shall consist of this document and MIL-PRF-93.

3.2 Interface and physical dimensions. Resistors shall meet the interface and physical dimensions specified on figure 1.

3.3 Resistance values and resistance tolerances. The maximum and minimum resistance values and resistance tolerance shall be as specified in table I.


TABLE I. Resistance values and resistance tolerance.

Tolerance (± percent)	Symbol	Minimum resistance (ohms)	Maximum resistance (ohms)
0.05	A	100	0.100 M
0.10	B	10	0.100 M
0.50	D	0.1	0.100 M
1.00	F	0.1	0.100 M

3.4 Power rating. Power rating shall be 0.125 watt.

3.5 Maximum voltage. Maximum voltage shall be 150 volts direct current or peak.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:52Z
Check the source to verify that this is the current version before use.

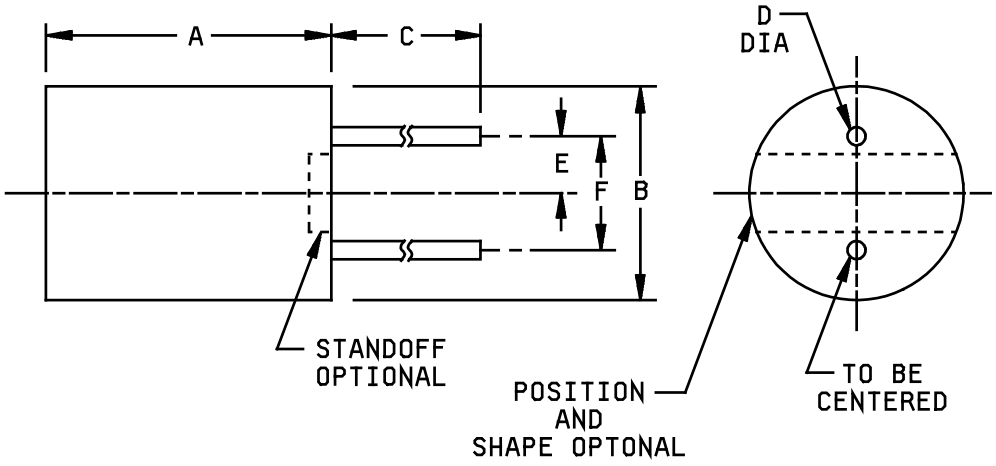

Dimension	Inches	mm
A	0.312 ±0.031	7.92 ±0.79
B	0.250 ±0.031	6.35 ±0.79
C	1.000 ±0.125	25.40 ±3.18
D	0.025 ±0.002	0.64 ±0.05
E	0.100 ±0.020	2.54 ±0.51
F	0.200 ±0.010	5.08 ±0.25

NOTE: Metric equivalents (to the nearest 0.01 mm) are given for general information only.

FIGURE 1. Style RB71.

4. VERIFICATION

* 4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-PRF-93.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:52Z
Check the source to verify that this is the current version before use.

6. NOTES

* 6.1 Intended use. The notes specified in MIL-PRF-93 are applicable to this specification.

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. Unless otherwise specified (see 2.1), the versions of the individual documents referenced will be those in effect on the date of release of the solicitation.

c. Packaging requirements (see 5.1).

6.3 Supplementary insulation. Where potential to ground is over 250 volts, supplementary insulation should be provided.

6.4 Substitution data. The resistors specified herein are not for use in design after 22 November 1968. They are authorized for use in design contracts effective prior to or on 22 November 1968, and to support existing military equipment. Resistors specified in MIL-PRF-39005/6 are preferred for design and regardless of the failure rate designation can be used as substitutes for the inactivated resistors of the same resistance value and tolerance of this specification.

* 6.5 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
Navy - EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AR, AV, CR4, MI
Navy – AS, MC
Air Force - 19

(Project 5905-2021-015)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:52Z
Check the source to verify that this is the current version before use.