NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

PERFORMANCE SPECIFICATION

RESISTORS, VARIABLE, COMPOSITION, STYLE 2RV7

This amendment forms a part of MIL-R-94/6C, dated 19 June 1985, and is approved for use by all Department and Agencies of the Department of Defense.

PAGE 2

TABLE I, delete and substitute:

*TABLE I. Length of operating shaft. 1/

Symbol	Length of operating shaft from mounting surface at resistor (nominal)		
	Flatted	Slotted	
	Bushings N and S inches ±.03125 (0.79 mm)	Bushings N and S inches, ±.03125 (0.79 mm)	Bushings L and T inches, ±.03125 (0.79 mm)
A			.625 (15.88 mm)
B		.50 (12.70 mm)	
D	.875 (22.23 mm)	.875 (22.23 mm)	.875 (22.23 mm)
E			
G		1.25 (31.75 mm)	
N		1.50 (38.10 mm)	
J		2.00 (50.80 mm)	
K		2.50 (63.50 mm)	

"


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:57Z
Check the source to verify that this is the current version before use.

PAGE 4

FIGURE 1, add the following drawing to figure 1:

"

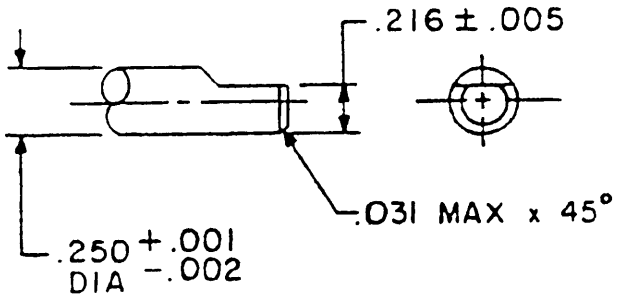

FLATTED SHAFT

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 17, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5905-1075)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:57Z
Check the source to verify that this is the current version before use.