INCH-POUND


MIL-DTL-11484/428
15 July 2019

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, NATIONAL RECONNAISSANCE OFFICE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

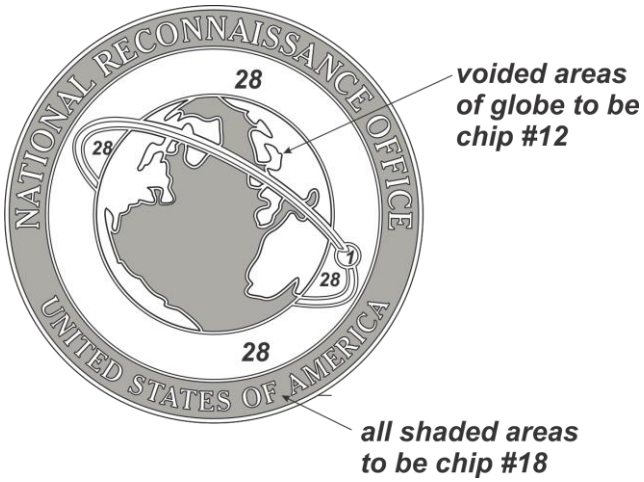

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Chip Number 6.

DIMENSIONS:
DIAMETER:
11/16 inch (REF)
THICKNESS:
-1: 0.070 inch ± 0.010 inch

ATTACHING DEVICE:
1. The attaching device shall be prong and flat ball type clutch.

2. The prong shall be fused or soldered on the reverse vertical center line 1/4 inch from the top of the lapel button.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:12Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below

TIOH HARD ENAMEL COLOR CHIPS	
COLOR AND CHIP NUMBER	**LOCATION (S)**
Red #1	Small Circle in Orbital Sphere
Blue #18	All Water and Outside Banner
White #28	Areas Outside the Earth
Green #12	Land Masses

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. If hard enamel is used then the material will be Gilding Metal 95/5 (UNS Alloy C-210).

Custodians:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2019-303)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:12Z
Check the source to verify that this is the current version before use.