NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/437
8 September 2020

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, COVID-19 PANDEMIC CAMPAIGN, U.S. PUBLIC HEALTH SERVICE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

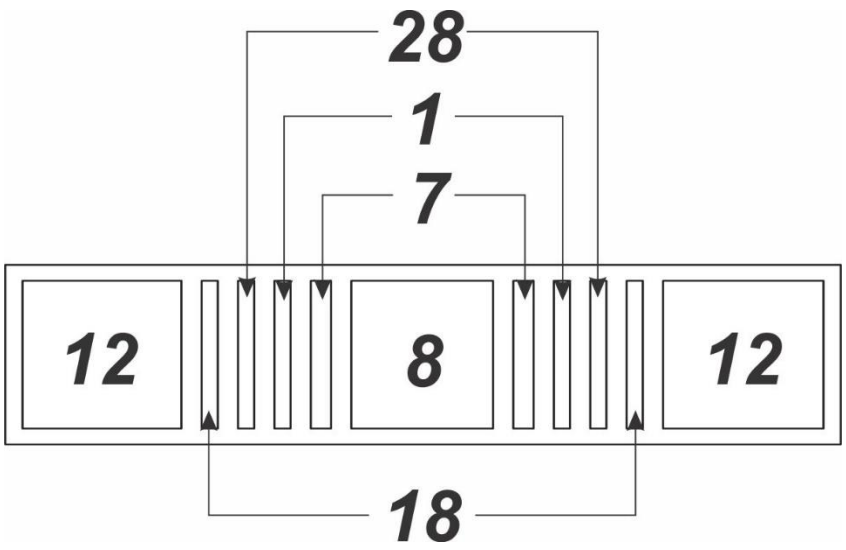

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Epoxy Resin, (Stoning epoxy) 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry Metal Finish Chip Number 6.

DIMENSIONS:

HEIGHT: 9/64 inch (REF)

WIDTH: 21/32 inch (REF)

THICKNESS: 0.055 inch $\pm$ 0.010 inch

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:13Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE:

1. The attaching device shall be prong with pick and wing type clutch.

2. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Orange	#7
Yellow	#8
Green	#12
Blue	#18
White	#28

NOTES:

1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. Hard enamel may be used in lieu of epoxy resin at the option of the manufacturer, if hard enamel is used the material shall be Gilding Metal 95/5 (UNS alloy C-210).

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-500)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:13Z
Check the source to verify that this is the current version before use.