NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/439
24 February 2021

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, CIVILIAN SERVICE, U.S. SPACE FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

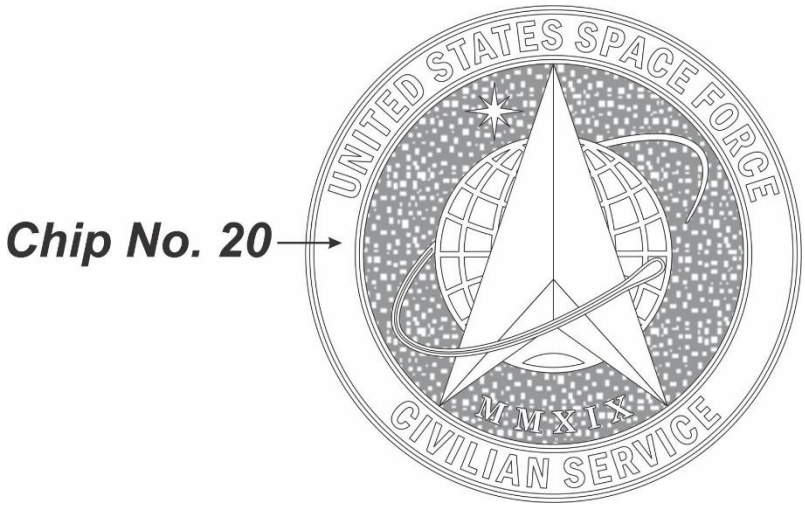

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Epoxy resin, Silver Plated, Oxidized, Buffed Relieved, Matte Finish and shall match TIOH Finish Chip 14.

DIMENSIONS:
DIAMETER: 15/16 inch (REF)
THICKNESS: 0.085 inch $\pm$ 0.010 inch

ATTACHING DEVICE:
1. Attaching device shall be a prong and wing type clutch.

2. The prongs shall be located on the vertical center line, 3/8 inch from the top.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:13Z
Check the source to verify that this is the current version before use.

EPOXY:

1. Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

2. Epoxy with be floating.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR CHIP NUMBER	**LOCATIONS**
Blue #20	Outer ring.

NOTE:
The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-120)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:13Z
Check the source to verify that this is the current version before use.