NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/451
7 March 2025

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, NAVY ARCTIC SERVICE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

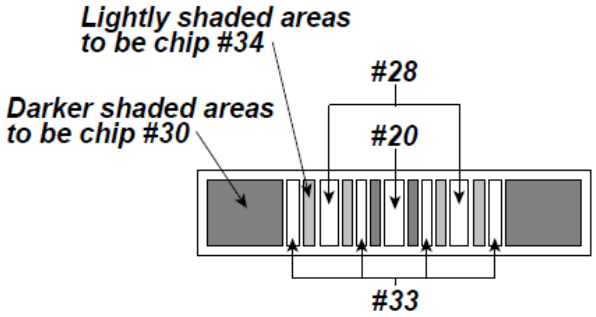

MATERIAL: Red Brass (UNS Alloy No. C-230)

FINISH: Stoned Epoxy, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

DIMENSIONS:
HEIGHT: 9/64-inch (REF)
WIDTH: 21/32-inch (REF)
THICKNESS (At edge): 0.050 inch ± 0.005 inch

ATTACHING DEVICE:
1. Attaching device shall be prong with pick and wing-type clutch

2. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:15Z
Check the source to verify that this is the current version before use.

EPOXY: Stoned Epoxy resin shall be applied to the lapel button as indicated above and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Blue	#20
White	#28
Blue	#30
Blue	#33
Blue	#34

NOTES:
1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

Custodians:
Army - IH
Navy - NU

Review activity:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-2025-065)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:15Z
Check the source to verify that this is the current version before use.