MIL-F-11522F
12 December 1973
SUPERSEDING
MIL-F-0011522E(MU)
14 December 1970
MIL-F-11522D
20 August 1965

MILITARY SPECIFICATION

FUZE, SMOKE POT, M208 AND

FUZE, HAND GRENADE, M226

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers two types of fuzes.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

TT-W-572 - Wood-Preservative, Water-Repellent.

MILITARY

MIL-B-2427 - Boxes, Ammunition Packing; Wood, Nailed.

FSC 1365

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Proccdures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-331 - Fuze and Fuze Components, Environmental and Performance Tests for.
MIL-STD-1168 - Lot Numbering of Ammunition.

DRAWINGS

US ARMY MUNITIONS COMMAND

EDGEWOOD ARSENAL

C36-7-9 - Fuze, Smoke Pot, M208.
D13-10-31 - Fuze, Hand Grenade, M226.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies of these ratings, rules and regulations should be addressed to Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Illinois 60606.)

AMERICAN TRUCKING ASSOCIATIONS, INC.

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., 1616 P Street, N. W., Washington, D. C. 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

AGENT T. C. GEORGE'S TARIFF

(Application for copies should be addressed to T. C. George, Agent, 2 Pennsylvania Plaza, New York, N. Y. 10001)

3. REQUIREMENTS

3.1 Materials and components.

3.1.1 Materials. All materials cited on either Drawing DL36-7-9 or DL13-10-31 or on the applicable subsidiary drawings shall conform to the specifications listed thereon, or to the specific characteristics set forth on the drawings.

3.1.2 Components. All components of the fuze shall conform to the specifications and drawings listed on the applicable Drawing DL36-7-9 or DL13-10-31 and subsidiary drawings.

3.2 Assembly. The fuze shall be assembled as shown on Drawing C36-7-9 or D13-10-31.

3.3 Functioning. The fuze after being subjected to transportation vibration in accordance with 4.4.4.2 shall ignite and burn for eight to twelve seconds and show a flash length of six inches minimum when tested in accordance with 4.4.4.1.

3.4 Safety pin pull. The safety pin shall be extracted when a force between 10 and 30 pounds is applied in accordance with 4.4.4.1.

3.5 Jolt. The fuze shall comply with the requirements of MIL-STD-331 when tested as specified in 4.3.4.1.

3.6 Jumble. The fuze shall comply with the requirements of MIL-STD-331 when tested as specified in 4.3.4.2.

3.7 Forty foot drop. The fuze shall comply with the requirements of MIL-STD-331 when tested as specified in 4.3.4.3.

3.8 Vibration. The fuze shall be subjected to transportation vibration test as specified in 4.4.4.2.

3.9 Preproduction. Prior to the start of regular production, a pre-production lot of fuzes shall be produced, examined and tested in accordance with this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

3.10 Workmanship. The fuze shall be free from foreign matter (oil and grease) and damage such as dents, cracks or deformation which could affect its use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.

4.1.1 Supplier's responsibility. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspection set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.2 Objective evidence. The supplier shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1 and section 5 for which specific inspection has not been provided in this specification have been satisfied.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (4.3)
(b) Quality conformance inspection (4.4)

4.3 Preproduction inspection.

4.3.1 Lot. A preproduction lot of 1201 fuzes or production from one shift, whichever is greater, shall be manufactured using the same methods, materials, equipment and processes as will be used during regular production.

4.3.2 Sampling.

4.3.2.1 For examination and functioning test. Sampling shall be conducted in accordance with MIL-STD-105.

(a) Jolt. Sampling shall be conducted in accordance with MIL-STD-105, level S-3.
(b) Jumble. Sampling shall be conducted in accordance with MIL-STD-105, level S-3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

(c) 40-Foot Drop. Sampling shall be conducted in accordance with MIL-STD-105, level S-3.

4.3.3 Inspection procedure.

4.3.3.1 For examination. The sample fuzes shall be examined in accordance with the classification of defects and with MIL-STD-105.

4.3.3.2 For destructive tests.

(a) Functioning. The sample fuzes shall be tested in accordance with 4.4.4.1 and table 1.

(b) Jolt. The sample fuzes shall be tested in accordance with 4.3.4.1 using an AQL of 1.5 percent defective.

(c) Jumble. The sample fuzes shall be tested in accordance with 4.3.4.2 using an AQL of 1.5 percent defective.

(d) 40-Foot Drop. The sample fuzes shall be tested in accordance with 4.3.4.3 using an AQL of 1.5 percent defective.

4.3.4 Tests. Tests shall be conducted as follows:

4.3.4.1 Jolt. Test the fuze in accordance with test 101 of MIL-STD-331.

4.3.4.2 Jumble. Test the fuze in accordance with 102 of MIL-STD-331.

4.3.4.3 Forty-Foot Drop. Test the fuze in accordance with test 103 of MIL-STD-331 except the fuze shall be dropped in test fixture (see fig 1).*

4.3.5 Critical defect. Each fuze in the preproduction lot shall be inspected for its critical characteristic listed in the classification of defects.

4.3.6 Acceptance/rejection criteria. The fuzes shall pass the examinations and tests of 4.3.3.1 and 4.3.3.2 to be acceptable. The supplier shall obtain written approval from the contracting officer prior to proceeding with regular production.

4.4 Quality conformance inspection.

4.4.1 Lotting. Each lot shall be identified and controlled in accordance with MIL-STD-1168. However, no more than one interfix

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

number of each component (primers and ignition train elements) shall be contained in any one lot of assembled fuzes.

4.4.2 Sampling.

4.4.2.1 For examination. Sampling shall be conducted in accordance with MIL-STD-105.

4.4.2.2 For destructive tests. Sampling shall be conducted in accordance with MIL-STD-105, level I.

4.4.3 Inspection procedure.

4.4.3.1 For examination. Sample fuzes and the level A preparation of delivery shall be examined in accordance with the classification of defects.

4.4.3.2 For destructive tests. Sample fuzes shall be tested in accordance with 4.4.4.1 and table I.

Table I. Functioning

Characteristic	AQL (percent defective)
Safety pin pull	2.5
Delay time	
Flash length	1.0
*Dud	0.65

*A dud is a fuze which malfunctions due to mechanical or pyrotechnic failure.

4.4.3.3 Critical defects. Each fuze in the regular production lot shall be inspected for its critical characteristic listed in the classification of defects.

4.4.3.4 Classification of defects.

(a) Fuze, smoke pot, M208 (Dwg C36-7-9) and Fuze, hand grenade, M226 (Dwg D13-10-31).

Categories	Defects
Critical:	
1	Safety pin missing or incorrectly formed

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

4.4.3.4 Classification of defects. (continued)

Categories	Defects
Major:	AQL 1.0 percent defective
101	Length of handle incorrect
102	Component missing or incorrectly assembled
103	Protective compound missing
104	Torque incorrect
105	Marking missing or incorrect
106	Thread incorrect
107	Workmanship (3.10)

(b) Preparation for delivery (section 5).

Categories	Defects
Critical:	None defined
Major:	AQL 2.5 percent defective
101	Marking missing or incorrect
102	Container closure incorrect
103	Strapping loose or missing

4.4.4 Tests.

4.4.4.1 Functioning. The fuze shall be tested as follows:

(a) Vibrate the fuze as specified in 4.4.4.2.

(b) Immerse the fuze in water at a temperature of 25° ± 5° C to a depth of 6 + 1/2 inch for a minimum period of 4 hours.

(c) Place the fuze in the Ignition Fuze Tester, Q149 and withdraw the safety pin.

4.4.4.2 Vibration. The fuze shall be tested in accordance with test 104 of MIL-STD-331.

5. PREPARATION FOR DELIVERY

5.1 Packaging (packaging shall be as specified see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

5.1.1 Packaging, levels A and C. The fuze shall be packaged as specified on Drawing D36-3-103.

5.1.2 Packaging, interplant shipment (see 5.2.3).

5.2 Packing (packing shall be as specified (see 6.1).

5.2.1 Level A. Fuzes shall be packed as specified on Drawing D36-3-101, except the shipping container and all wood parts thereof shall be fully immersed for a minimum of three minutes in a water repellent, wood preservative conforming to composition A of TT-W-572. Prior to packing the fuzes in the treated shipping containers, the preservative shall be dry as evidenced by the drying test specified in MIL-B-2427.

5.2.2 Level C. Fuzes shall be packed as specified on Drawing D36-3-101.

5.2.3 Interplant shipment (see 6.2). Four boxes of fuzes not to exceed the weight limitations specified as follows shall be packaged and packed in containers or special packs as applicable, together with interior packaging constructed as to give assurance that the fuzes being shipped will remain in prime condition and adequate to assure safe delivery to destination without damage to contents. The containers shall comply with Uniform Freight Classification, National Motor Freight Classification, or Agent T. C. George's Tariff, as applicable, and be acceptable for shipment at the most favorable rate. The containers shall be sufficiently rigid to withstand transportation and permit storing in tiers at least 10 feet high without damage to containers or contents. The gross weight and size limitations of the containers shall not exceed the tariff or classification limitations specified therein, and the containers shall be closed or strapped as specified therein.

5.3 Marking.

5.3.1 Levels A and C. In addition to any special marking required by the contract or order, unit packages shall be marked in accordance with Drawing D36-3-103 and Drawing D36-3-104. Shipping containers shall be marked in accordance with Drawing D150-3-1.

5.3.2 Interplant shipment (see 6.2). In addition to any special marking required by the contract or order, unit packages and shipping containers shall be marked in accordance with the domestic shipping requirements specified in MIL-STD-129.

5.4 Palletization. When required by the contract or order, shipping containers shall be palletized in accordance with Drawing D36-7-46.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Level of packaging and packing.
(c) Preproduction.

(1) Time allowed for supplier submission of samples for Government test and evaluation after award of contract.
(2) Name and address of test facility and shipping instructions when testing is performed by the Government.
(3) Time required for the Government to notify the supplier whether to proceed with production.

6.2 Interplant shipment. Packaging for material which does not enter the military supply system are shipments from a vendor to a contractor, a subcontractor or a supplier to a military arsenal or plant.

Custodians:

Army - MU
Navy - OS

User-MC

Preparing activity:

Army - MU(EA)

Project No. 1365-0196

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

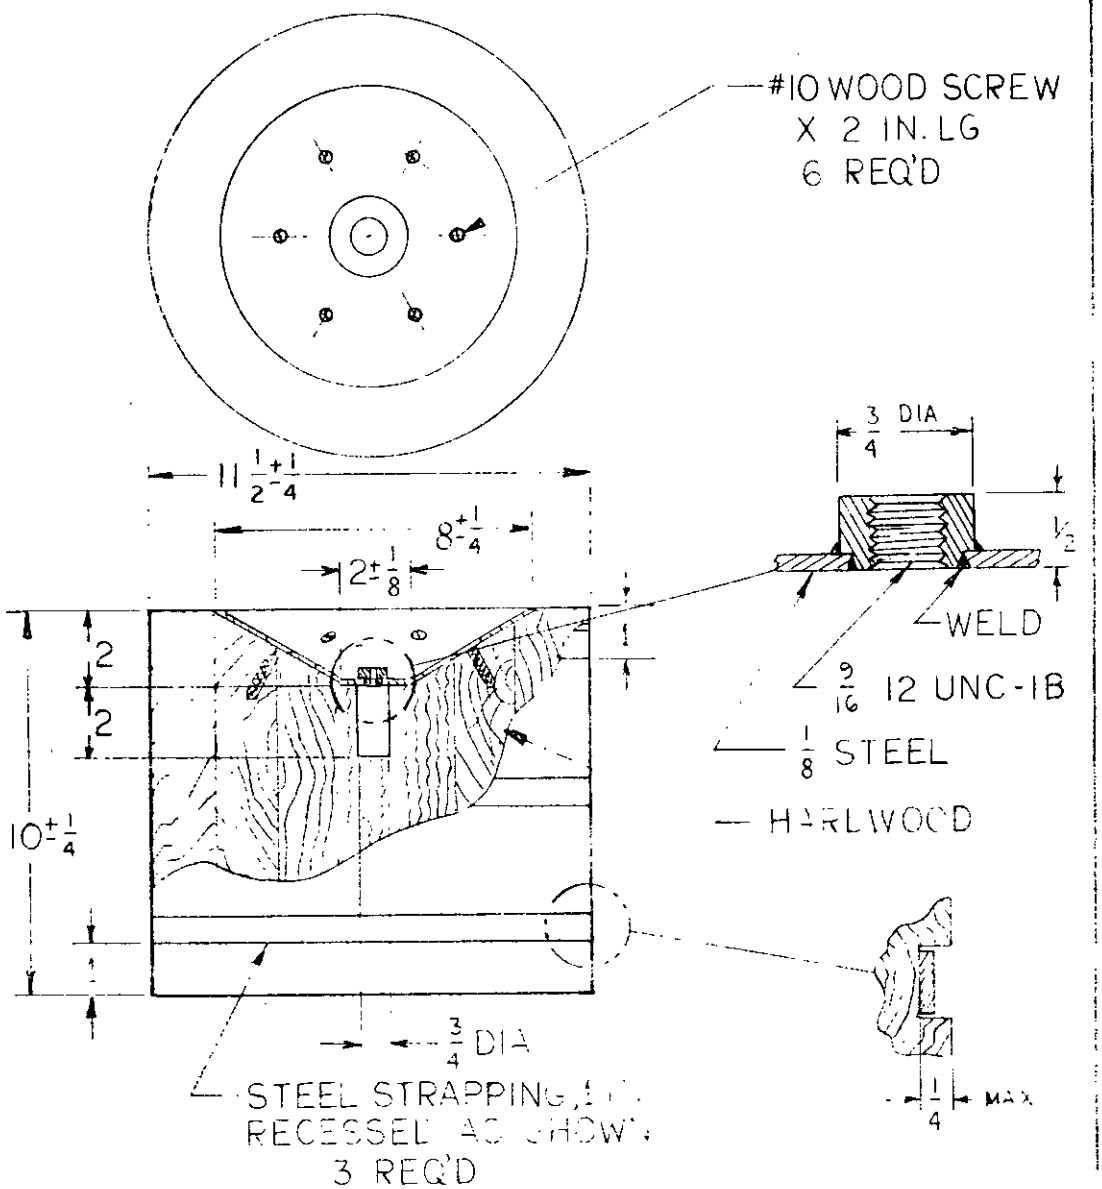


FIGURE 1 *FOR FUZE M208

FOR FUZE M226 USE AN INERT FILLED GRENADE (MF4)

US ARMY EDGEWOOD ARSENAL SPECIFICATION FIGURE	
PATTERN SET TO	AT76-301-04

☆ U. S. GOVERNMENT PRINTING OFFICE: 1974 -713-151 3388

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
Edgewood Arsenal
ATTN: SAREA-MI-CS
Aberdeen Proving Ground, MD 21010

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.