MILITARY SPECIFICATION

TANK, 76-MM GUN, M41, M41A1, M41A2 and M41A3;
PROCESSING FOR STORAGE AND SHIPMENT OF

1. SCOPE

1.1 Scope. This specification covers processing of the Tank, 76-MM Gun, M41, M41A1, M41A2 and M41A3, for storage outside of buildings, for immediate use shipment, and for domestic or oversea shipment, including carloading; meeting the requirements of levels A, B and C processing (see 1.2).

1.2 Classification. Processing shall be of the following levels as specified (see 6.1):

Level A	-	Processing for domestic or oversea shipment and any storage outside of buildings in excess of 90 days from date of processing (periodic care and preservation during storage required).
Levels B and C	-	Limited processing for immediate use shipment and for domestic or oversea shipment (excluding open deck loading) and any storage not to exceed 90 days from date of processing.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

O-E-760	-	Ethyl Alcohol (Ethanol); Denatured Alcohol: and Proprietary Solvent.
O-S-576	-	Sodium Bicarbonate, Technical.
P-D-220	-	Detergent, General Purpose.
HH-T-791	-	Tube, Flexible Nonmetallic, Electrical.
NN-P-530	-	Plywood, Flat-Panel.
RR-W-360	-	Wire Fabric, Industrial.
TT-E-529	-	Enamel, Alkyd, Semi-Gloss.

Source: https://assist.dla.mil -- Downloaded: 202640-17T18:18Z
Check the source to verify that this is the current version before use.

UU-P-268 - Paper, Kraft, Untreated, Wrapping.
UU-P-271 - Paper, Wrapping, Waterproofed Kraft.
UU-T-81 - Tags, Shipping and Stock.
UU-T-106 - Tape, Pressure-Sensitive Adhesive, Masking, Paper.
VV-L-800 - Lubricating Oil, General Purpose, Preservative, (Water-Displacing, Low Temperature).
CCC-C-429 - Cloth, Osnaburg, Cotton.
NNN-P-40 - Paper, Lens Tissue.
PPP-B-636 - Box, Fiberboard.
PPP-C-843 - Cushioning Material, Cellulosic.
PPP-P-291 - Paperboard, Wrapping, Cushioning.
PPP-T-60 - Tape: Pressure-Sensitive Adhesive, Waterproof, for Packaging.

Military

MIL-P-116 - Preservation, Methods of.
MIL-B-117 - Bags and Sleeves, Interior Packaging.
MIL-B-121 - Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-A-148 - Aluminum Foil.
MIL-S-207 - Sulfuric Acid, Electrolyte: Packaging, Packing, and Marking for Shipment and Storage of.
MIL-C-450 - Coating Compound, Bituminous Solvent Type, Black (For Ammunition).
MIL-P-3420 - Packaging Materials, Volatile Corrosion Inhibitor, Treated, Opaque.
MIL-G-5572 - Gasoline, Aviation: Grades 80/87, 100/130, 115/145.
MIL-H-6083 - Hydraulic Fluid, Petroleum Base, for Preservation and Testing.
MIL-I-8574 - Inhibitors, Corrosion, Volatile, Utilization of.
MIL-G-10924 - Grease, Automotive and Artillery.
MIL-P-12841 - On Vehicle Equipment (OVE) for Military Vehicles, Packaging of.
MIL-P-13983 - Paint, Temporary, Lusterless, Gasoline Removable.
MIL-P-13988 - Paper, Lens, Tissue, Antitarnish, Wrapping.
MIL-P-14232 - Parts, Equipment and Tools for Army Materiel, Packaging and Packing of.
MIL-C-16173 - Corrosion Preventive Compound, Solvent Cutback, Cold-Application.
MIL-C-16555 - Coating Compound, Strippable, Sprayable.
MIL-D-16791 - Detergents, General Purpose (Liquid, Nonionic).
MIL-L-21260 - Lubricating Oil, Internal-Combustion Engine, Preservative.
MIL-L-46002 - Lubricating Oil, Contact and Volatile Corrosion, Inhibited.
MIL-T-50036 - Talc, Technical, Tl.

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

STANDARDS
Military
MIL-STD-129 - Marking for Shipment and Storage.

DRAWINGS
Army
8674668 - Installation Saddle OVM
8674669 - Saddle Assembly OVM

PUBLICATIONS
Packaging Data Sheet
MS35000-3 - Battery, Dry Charge, Storage, Type 6TN.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASSOCIATION OF AMERICAN RAILROADS PUBLICATION

Section No. 1 - General Rules Governing Loading of Commodities on Open Top Cars.
Section No. 6 - Rules Governing the Loading of Department of Defense Materiel on Open Top Cars.

(Application for copies should be addressed to the Association of American Railroads, 59 East Van Buren, Chicago, Illinois 60605.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies).

3. REQUIREMENTS

3.1 Level A.

3.1.1 First production processed vehicle. Unless otherwise specified (see 6.1), the first production processed vehicle shall be subjected to the inspection specified in 4.2. Approval of the first production processed vehicle shall not relieve the contractor of his obligation to process all vehicles in accordance with this specification. Except as otherwise specified by the procuring activity, any change to materials or design after approval of the first production processed vehicle shall require submission of an additional production processed vehicle to the inspection specified in 4.2.

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the currentversion before use.

3.1.2 One of the next 10 production processed vehicles. After approval of the first production processed vehicle (see 3.1.1), one of the next 10 production processed vehicles shall be selected by the Government representative, for inspection specified in 4.2.

3.1.3 Materials.

3.1.3.1 Volatile corrosion inhibitor (VCI). When a VCI type carrier material is specified, it shall conform to type I, class 3, style A of MIL-P-3420 and shall be used in accordance with MIL-I-8574.

3.1.3.2 Stock numbers. Materials to be obtained through Government supply channels shall be ordered by stock numbers or specifications.

3.1.3.3 Exterior overspray. When exterior surfaces of vehicle and such items as tape and shrouds are to be oversprayed, coating compound conforming to MIL-C-16555 shall be used. Thickness of coating shall be such as to result in a minimum thickness of 0.040 inch, measured after four hours of drying (see 4.6.1). Specified thickness shall extend not less than two inches beyond tape or other bridging material.

3.1.4 Preparation prior to processing. Except as otherwise specified herein, and to the maximum extent consistent with production efficiency, economy, and safe storage and shipment, vehicle shall be prepared for storage and shipment in a completely assembled condition after test runs, and completion and approval of all necessary repairs. Specified equipment shall be installed and all adjustments made so that the vehicle may be operated, shipped, and placed into service with a minimum of delay.

3.1.4.1 Processing records. Records of vehicle processing shall be maintained, and readily available for review by the Government representative.

3.1.4.2 Disassembly. Parts vulnerable to damage and pilferage; and projecting parts whose removal will accomplish the desired reduction in cube shall be removed from the vehicle. Removed parts shall be preserved, packaged and packed. The packed parts shall be identified and placed in a protected location in the vehicle, and secured in a manner to prevent movement and damage during shipment and storage. Removed bolts, nuts, screws, pins and washers shall be placed in one of the mating parts and secured.

3.1.4.2.1 Matchmarking. Parts removed from the vehicle shall be matchmarked when necessary to facilitate reassembly. Matchmarking information shall be on cloth shipping tags conforming to type A of UU-T-81, or metal tags marked

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

with soluble paint and attached to mating parts. The marked cloth shipping tags shall be waterproofed in accordance with MIL-STD-129.

3.1.5 Cleaning and drying.

3.1.5.1 Interior of vehicle. Vehicle interior surfaces shall be cleaned in accordance with process C-1 of MIL-P-116, except that cleaning compounds shall be detergents conforming to P-D-220 or MIL-D-16791, in warm water solution. Liquids under pressure shall be used only in the engine compartment. Drying shall be in accordance with any applicable procedure of MIL-P-116.

3.1.5.1.1 Battery supports and retainers. Battery supports and retainers shall be cleaned with a solution composed of 1/2 pound of sodium bicarbonate, conforming to O-S-576, per gallon of water, flushed with clear water and dried. Battery supports and retainers shall be coated with compound conforming to MIL-C-450.

3.1.5.1.2 Headrests, seats and protective pads. Cushioned components of installed headrests, seats and protective pads shall be washed with a solution of soap and water, rinsed with clear water, dried, and immediately packaged (see 3.1.16).

3.1.5.1.3 Fire control items. Exposed optical glass components of fire control items shall be cleaned by blowing with air from a hand syringe, or by use of a clean camel-hair brush, followed by the use of ethyl alcohol conforming to O-E-760. In cases of contamination not removed by alcohol, cleaning shall be accomplished by use of a solution consisting of two ounces of detergent conforming to MIL-D-16791, 1/2 gallon of alcohol conforming to O-E-760, and one gallon distilled water. Using a swab made of paper conforming to type I or II of NNN-P-40, optical glass surfaces shall be washed with the cleaning agent; and washing repeated, using a clean swab each time, until no dirt or other foreign matter remains on the surface. Cleaning shall be accomplished with a minimum of pressure and rubbing, and without use of cloth or rubber materials. Immediately after cleaning, the optics shall be covered or wrapped with lens tissue conforming to MIL-P-13988, and secured with tape conforming to UU-T-106.

3.1.5.1.4 Fuel filter sediment bowl. Fuel filter sediment bowl shall be disconnected from the fuel line, cleaned in accordance with process C-1 of MIL-P-116, and dried by any applicable procedure specified therein. Sediment bowl shall be flushed with lubricating oil conforming to VV-L-800 and reinstalled.

3.1.5.2 Exterior of vehicle. Using a mild detergent, vehicle exterior surfaces, including the engine compartment, shall be cleaned in a manner which will assure removal of all foreign matter, including cleaning material. Cleaning shall be followed by a complete rinsing with clear water, then thoroughly dried.

Source: https://assist.dla.mil -- Downloaded: 202640-17T18:18Z
Check the source to verify that this is the current version before use.

Vehicle shall be cleaned without directing steam or water jet at or above ring opening between turret and upper hull, commander's cupola ring opening, openings of turret, against any armament, or into exhaust openings.

3.1.5.2.1 Cannon. When inspection indicates the need for reprocessing (see 4.5.2.2), cannon shall be cleaned in accordance with process C-3 and dried in accordance with procedure D-4 of MIL-P-116.

3.1.6 Relubrication. When vehicle has been operated in excess of 50 miles since previous lubrication, or after a liquid or steam cleaning, vehicle shall be lubricated using materials in accordance with drawings, specifications or lubrication order pertinent to the vehicle. All exposed oil can points such as; hinges, latches, control rod clevises and pins, control levers, brake linkage and throttle control linkage shall be lubricated with oil conforming to VV-L-800. Excess lubricating material shall be removed after lubrication.

3.1.7 Transmission and final drives. Transmission and final drives shall contain preservative oil only. Preservative oil in transmission shall conform to grade 1 of MIL-L-21260, filled to operating level. Final drives shall contain preservative oil conforming to grades 1, 2 or 3, as applicable, of MIL-L-21260, filled to operating level. DD Form 1397 (see 3.1.20) shall be marked to indicate grade of preservative oil used.

3.1.8 Main and auxiliary engine crankcases. Engine crankcases shall contain preservative oil only, conforming to grades 1, 2 or 3, as applicable, of MIL-L-21260, filled to operating level. DD Form 1397 shall be marked to indicate grade of preservative oil used.

3.1.9 Main engine.

3.1.9.1 Preservation through fuel system and carburetor. A frame supported container with two compartments shall have one compartment filled with lubricating oil conforming to grade 1 of MIL-L-46002 and the other compartment filled with fuel conforming to MIL-G-5572. Vehicle fuel tank selector valve shall be placed in the "OFF" position. A tag bearing the information, "REFILL FUEL TANK BEFORE CHANGING POSITION OF THE SELECTOR VALVE", shall be securely attached to the fuel tank selector valve handle. The fuel intake line shall be disconnected from the fuel tank side of engine driven fuel pump, at the quick-disconnect coupling. The female quick-disconnect coupling on the line from the container shall be connected to the male quick-disconnect coupling of fuel intake line. (For injector type engine, injector fuel return line shall be disconnected at the quick-disconnect coupling. A line shall be provided and connected to the fuel return line to permit draining into a recovery container. Recovered fuel-oil mixture shall not be used for processing other engines). Container valve shall be turned to the "FUEL" position. Engine shall be started and operated at minimum idle for one minute. The engine shall be accelerated to 3/4 speed, without load, at which time the container valve shall be turned from the

Source: https://assist.dla.mil -- Downloaded: 20260-17T18:18Z
Check the source to verify that this is the current version before use.

"FUEL" to the "OIL" position. The instant the engine begins to misfire, the magneto switches shall be turned to the "OFF" position. Container fuel return line shall be disconnected from the engine and vehicle fuel line reconnected.

3.1.9.2 Preservation through spark plug openings. After preservation through fuel system (see 3.1.9.1), engine shall be cooled for 24 hours or until a maximum cylinder head temperature, measured at spark plug seats, of 100°F is reached. Induced air currents may be used to accelerate cooling of engine. The fuel filter housing shall be drained. Spark plugs shall be removed. Protection shall be provided to assure maximum care in handling of spark plugs to avoid damage to electrodes and threads during processing. While the engine is being cranked with the starting motor, two ounces of preservative oil conforming to grade 1 of MIL-L-46002 shall be atomize sprayed into each cylinder through the spark plug opening. Two additional ounces of the grade 1 preservative oil shall be atomize sprayed into each cylinder, without cranking. Threaded ends of removed spark plugs shall be coated with the same grade of oil and plugs reinstalled. A red warning tag bearing the following information shall be located within the driver's compartment: "ENGINE PRESERVED FOR STORAGE; DO NOT CRANK". DD Form 1397 shall be marked to indicate the grade of preservative oil used.

3.1.10 Auxiliary engine.

3.1.10.1 Preservation through fuel system and carburetor. Using the same container, fuel, and oil specified for the main engine, the auxiliary engine flexible fuel line shall be disconnected at the quick-disconnect located at rear of the auxiliary engine. Container coupling shall be attached to the female end of the quick-disconnect leading to the fuel filter. Engine shall be started and operated on fuel until running smoothly, at which time the valve on container shall be switched from "FUEL" to "OIL". Engine shall be operated until it begins to misfire, at which time the magneto shall be switched to "OFF" position. Container fuel return line shall be disconnected from the engine, and flexible fuel line reconnected.

3.1.10.2 Preservation through spark plug openings. After preservation through fuel system, engine shall be cooled to 100°F, or less. Spark plug shall then be removed and while cranking engine with the starter, one ounce of preservative oil conforming to grade 1 of MIL-L-46002, shall be atomize sprayed into the cylinder through the spark plug opening. Engine shall be cranked an additional five revolutions after spraying of preservative. After engine has stopped, one additional ounce of the same preservative oil shall be sprayed through the spark plug opening. Engine shall not be cranked during or after spraying of the second ounce of preservative oil. Threaded end of spark plug shall be coated with grade 1 preservative oil and spark plug reinstalled.

3.1.11 Air cleaners. Air cleaners shall be filled to operating level with oil in accordance with applicable drawings, specifications, or lubrication order. When operating oil is not specified, preservative oil conforming to

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

grades 1 or 2, as applicable, of MIL-L-21260 shall be used.

3.1.12 Fuel tanks. Fuel tanks shall be completely drained of fuel. Tanks shall be filled to maximum capacity with preservative oil conforming to grade 2 of MIL-L-21260, drained until flow ceases, and drain plugs reinstalled. Fuel tank cap and filler screens shall be coated with preservative oil conforming to grade 2 of MIL-L-21260, and reinstalled. The drained preservative oil may be reused for processing additional fuel tanks provided not more than 10 percent of the resultant fluid is gasoline when tested as specified in 4.6.2.

3.1.13 Turret ring bearing. Plugs shall be removed from grease fitting openings in turret ring bearing, and grease fittings installed. Grease conforming to MIL-G-10924 shall be pumped through the grease fittings until visible between the two sections around the circumference of the ring. The turret shall be rotated five times in each direction and again lubricated to replace displaced lubricant. Grease fittings shall then be removed and plugs reinstalled. Excess grease shall be removed from the outside surfaces. DD Form 1397 shall be marked with the following information: "TURRET RING BEARING COMPLETELY FILLED WITH GREASE - MIL-G-10924".

3.1.14 Cannon and mount.

3.1.14.1 Blast deflector and bore evacuator. The blast deflector and bore evacuator shall be removed. Machined, threaded surfaces shall be coated with compound conforming to grade 1 of MIL-C-16173. All other surfaces shall be painted. The bore evacuator, blast deflector lock, key and hardware shall be coated with oil conforming to VV-L-800. The lock, key and hardware shall be placed in a bag conforming to type II, class C of MIL-B-117. The bag shall be closed by stapling and placed within the interior of evacuator. The evacuator shall be overwrapped with VCI carrier material conforming to type I, class 3, style A of MIL-P-3420. After application of VCI material, the evacuator shall be wrapped with two thicknesses of barrier material conforming to type I, grade C of MIL-B-121 extending over the evacuator ends and sealed with tape conforming to class 1 of PPP-T-60. A tag bearing the bore evacuator identification, and the information "BLAST DEFLECTOR LOCK, KEY AND HARDWARE INSIDE BORE EVACUATOR" shall be secured to the exterior of bore evacuator package. After preservation and packaging, the blast deflector and bore evacuator shall be secured within the vehicle turret.

3.1.14.2 Cannon processing. Immediately after cleaning (see 3.1.5.2.1), bore and chamber of the cannon shall be coated with preservative oil conforming to VV-L-800. Excess preservative shall be allowed to drain from coated surfaces. The bore and chamber shall be protected by inserting a strip of VCI carrier material conforming to type I, class 3, style A of MIL-P-3420 (see 3.1.3.1). Material shall be of a size that will provide a continuous cover for the bore and chamber surfaces. Treated side of VCI material shall be adjacent to bore and chamber surfaces. Exterior unpainted surfaces of the muzzle end of cannon

Source: https://assist.dla.mil -- Downloaded: 202640-17T18:18Z
Check the source to verify that this is the current version before use.

shall be coated with preservative oil conforming to VV-L-800 and covered with a wrap of VCI carrier material conforming to MIL-P-3420. The wrap shall extend two inches from the muzzle end to three inches on the painted surface beyond evacuator holes. Seams and edges shall be sealed with tape conforming to class 1 of PPP-T-60. Plugs shall be provided for muzzle and breech ends of the cannon. All cannon contacting surfaces of the plugs shall be coated with compound conforming to type II, class 1 of MIL-C-16555. The coated muzzle plug shall then be positioned in the end of the cannon and secured in place with tape conforming to class 1 of PPP-T-60. The joint between plug and cannon shall be completely sealed with the same class tape. The exposed surfaces of plug and VCI carrier material shall be overwrapped with aluminum foil conforming to MIL-A-148. All seams and edges shall then be sealed with tape conforming to class 1 of PPP-T-60. After taping, foil overwrap shall be coated with compound conforming to type II, class 1 of MIL-C-16555. Unpainted surfaces, including phosphated surfaces of breech ring, breech operating mechanism and firing mechanism shall be coated with grease conforming to MIL-G-10924. The breech shall be opened and the chamber plug inserted in the cannon chamber. Breech shall then be closed.

3.1.14.3 Exercising of recoil mechanism. Prior to processing as specified in 3.1.14.2, and when the recoil mechanism has not been exercised, proof fired, overhauled, or manufactured within four months prior to preparation for storage or shipment, the recoil mechanism shall be exercised a minimum of three extensions of the recoil piston. Extension shall be a minimum of six inches. Record of exercising shall be entered on DA Form 2408-4 "Weapon Record Data" and proof testing of the weapon entered on DA Form 2408-9 "Proof Acceptance Record" (see 3.1.20).

3.1.14.3.1 Processing of recoil mechanism after exercising. Accessible machined metal surfaces of the cannon immediately forward of the recoil mechanism shall be coated with grease conforming to MIL-G-10924. Inaccessible machined metal surfaces shall be fogged with preservative oil conforming to grade 1 of MIL-L-21260. The surface of the recoil mechanism immediately forward of breech ring collar shall be coated with grease conforming to MIL-G-10924. Application of grease shall be made while cannon is out of battery during exercising and upon last extension prior to return to battery.

3.1.14.4 Exercising of replenisher. Replenisher assemblies shall be exercised coincidentally with the recoil mechanism (see 3.1.14.3).

3.1.14.4.1 Processing of replenisher after exercising. Replenisher shall be filled to bleed position with hydraulic fluid conforming to MIL-H-6083, then drained to operating level.

3.1.14.5 Cannon mounts. Exposed, unpainted surfaces of elevating cylinder, trunnions, trunnion caps, and trunnion bearings shall be coated with grease conforming to MIL-G-10924. Unpainted surfaces, including phosphated surfaces of

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

elevating and traversing mechanisms for coaxial machine gun shall be coated with the same type grease.

3.1.14.6 Miscellaneous armament and related items. Except as otherwise specified herein, all exposed, unpainted metal surfaces, including phosphated surfaces of the following items, shall be coated with grease conforming to MIL-G-10924:

(a) Equilibrators.
(b) Traversing ring gear and pinion.
(c) Traversing bearing.
(d) Elevating mechanism.
(e) Traversing mechanism.
(f) Elevating sector and pinion.
(g) Automatic loader assembly.
(h) Loader tray assembly.
(i) Breech casing.
(j) Firing lever assembly.
(k) Firing rod assembly and related parts.
(l) Cartridge case chute.
(m) Deflector assembly.

3.1.15 Covers. Cannon mantlet cover shall be removed (see 3.1.23.1.6), thoroughly dried, then placed in a box conforming to PPP-B-636. After packaging, container shall be identified and placed within vehicle turret.

3.1.16 Headrests, seats and protective pads. Immediately after drying (see 3.1.5.1.2), cushioned components of installed headrests, seats and protective pads shall be covered with paper having a minimum basis weight of 60 pounds, conforming to grade B of UU-P-268. Paper shall be secured in place with tape conforming to type I of UU-T-106.

3.1.17 Batteries, cables, and electrolyte.

3.1.17.1 Dry charge batteries and cables. Positive battery cables shall be taped to the battery-to-ground cable with tape conforming to class 1 of PPP-T-60. Battery supports, retainers and related hardware shall be grouped together and secured to battery cables with the same class tape. Dry charge batteries shall be packaged and packed in accordance with the level A requirements of Packaging Data Sheet MS35000-3. Instructions for activation of batteries shall be packed with the battery. Dry charge batteries shall be stowed with on vehicle equipment (OVE) and secured independently in a manner to prevent movement and damage in transit.

3.1.17.2 Electrolyte. Electrolyte shall be packaged, packed, and marked in accordance with type IV, class 1 or 2 unit, as applicable, of MIL-S-207.

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

Electrolyte shall be stowed with OVE, secured independently in a manner to prevent movement and damage in transit and permitting easy removal at ports where special stowing is required by maritime regulations.

3.1.18 Miscellaneous preservation. Except as otherwise specified herein, all exposed, unpainted, metal surfaces on the outside of the vehicle, except tracks, shall be coated with compound conforming to grade 1 of MIL-C-16173. All interior, exposed, unpainted, unplated metal surfaces shall be coated with compound conforming to grade 4 of MIL-C-16173.

3.1.19 On vehicle equipment. Except as otherwise specified herein, all spare parts, tools, equipment and other loose items shall be preserved and packaged level A in accordance with applicable packaging data sheets, MIL-P-12841 and MIL-P-14232. Packaged items shall then be packed in accordance with level A requirements of MIL-P-12841 and containers identified to pertinent vehicle by serial number. Containers shall be marked in accordance with MIL-STD-129 and stowed, stored, loaded or shipped in conformance with MIL-P-12841 for level specified in 6.1.

3.1.20 Record forms. A copy of "The Equipment Log Book" consisting of Binder (FSN 7510-889-3494) with required forms, and two copies of "Processing and Deprocessing Record for Shipment, Storage and Issue of Vehicles and Spare Engines", DD Form 1397, and single copies of DA Form 2408-4, Weapon Record Data and DA Form 2408-9, Proof Acceptance Record (see 6.2) shall be furnished and completed with each vehicle. Instructions for preparation and attachment or location of "The Equipment Log Book" shall be supplied by the Government representative. One copy of DD Form 1397 shall be placed in a bag conforming to type II, class B of MIL-B-117. Bag shall be closed by stapling, identified and secured to headlamp. The duplicate copy shall be placed with the log book.

3.1.21 Hatches and doors. Rubber seals around hatches and doors shall be coated with powdered talc conforming to MIL-T-50036. Except when in storage (see 3.1.23.1.3), hatches and doors shall be closed and locked. Commander's hatch shall be secured using an approved railroad type seal placed through locking lugs.

3.1.22 Fire control items.

3.1.22.1 Periscopes, telescope and dry-cell powered instrument lights. If installed, periscopes, telescope and instrument lights shall be removed from the vehicle, packaged and packed in accordance with the requirements specified for level A of MIL-P-14232, identified and stowed with OVE. Instrument lights shall be packaged without batteries.

3.1.22.2 Ballistic drive, periscope and telescope mounts. Exposed, unpainted metal surfaces of ballistic drive, periscope and telescope mounts shall be coated with grease conforming to MIL-G-10924.

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

3.1.23 Vehicle sealing. Vehicle closure shall be of the rigid or the flexible type, as specified (see 6.1), and shall conform to the following:

3.1.23.1 Rigid closure.

3.1.23.1.1 Engine compartment. The engine compartment shall be covered with barrier material conforming to CCC-C-429. All projecting areas and sharp corners shall be cushioned with material conforming to type II, class B of PPP-C-843, prior to installation of barrier. Barrier shall overlap edges a minimum of three inches and secured in position with tape conforming to PPP-T-60. Barrier and tape shall be oversprayed with compound conforming to MIL-C-16555 with overspray extending three inches beyond tape.

3.1.23.1.2 Ventilation. All access plates, covers and gaskets shall be removed for ventilation. Metal surfaces shall be coated with preservative conforming to grade 4 of MIL-C-16173. Removed items shall be placed in a box conforming to PPP-B-636 and stowed within vehicle. Threaded portions exposed by the removal of these items shall be coated with preservative conforming to grade 4 of MIL-C-16173. The information "REMOVE SCREENS, INSTALL ACCESS PLATES, COVERS AND GASKETS, AND CLOSE DRAINS BEFORE DEEP WATER FORDING OR OFF SHORE LOADING" shall be stenciled on the exterior of vehicle. Stenciling color shall be white or yellow paint conforming to MIL-P-13983. Characters shall be a minimum of 3/4 inch in height.

3.1.23.1.3 Screens. Screens constructed of wire cloth, 0.047 inch diameter, 4 by 4 mesh, conforming to type I, class 1 of RR-W-360 shall be installed in access plate openings and secured with existing bolts. During storage (see 3.1.21), hatches and doors beneath the closure shall be secured in an open position of not less than two inches.

3.1.23.1.4 Ventilators. A ventilator shall be installed in engine grille cover using an adapter affixed to a square of plywood 1/4 by 12 by 12 inches conforming to NN-P-530. Plywood shall be secured to engine grille. Another ventilator and adapter assembly shall be installed on the cupola periscope opening using existing bolts. Ventilator adapter flanges shall be oversprayed with compound conforming to type II, class 1 of MIL-C-16555.

3.1.23.1.5 Turret ring opening. Opening between turret ring and hull shall be sealed with tape conforming to UU-T-106, and oversprayed with compound conforming to type II, class 1 of MIL-C-16555; or sealed with tubing conforming to HH-T-791, threaded with wire, and oversprayed with compound conforming to type II, class 1 of MIL-C-16555.

3.1.23.1.6 Cannon shield. Area exposed by removal of cannon mantlet cover (see 3.1.15) shall be covered with osnaburg cotton conforming to CCC-C-429,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

secured with tape conforming to UU-T-106, and oversprayed with compound conforming to type II, class 1 of MIL-C-16555. An opening shall be cut, 2 by 2 inches wide, in the osnaburg cover at the lowest point below the cannon shield to afford drainage.

3.1.23.1.7 Cupola and hatches. Openings around hatch and cupola ring shall be sealed with tape conforming to UU-T-106 and oversprayed with compound conforming to type II, class 1 of MIL-C-16555. After overspraying, tape and barrier material shall be slit at drain slot at rear of cupola.

3.1.23.2 Flexible closure.

3.1.23.2.1 Chassis. A closure consisting of a frame assembly and a cover assembly shall be fabricated, assembled and installed in accordance with Appendix I and figures 6A through 119.

3.1.23.2.2 Ventilation. All access plates and gaskets on underside of vehicle shall be removed. All drain valves in hull and stowage boxes shall be opened for ventilation. All unpainted, metal surfaces shall be coated with preservative conforming to grade 4 of MIL-C-16173. Removed items shall be placed in a box conforming to PPP-B-636 and stowed within vehicle. Unpainted threaded portions exposed by removal of these items shall be coated with preservative conforming to grade 4 of MIL-C-16173. The information "REMOVE SCREENS, INSTALL ACCESS PLATES, COVERS AND GASKETS, AND CLOSE DRAIN VALVES IN HULL AND STOWAGE BOXES BEFORE DEEP WATER FORDING OR OFF SHORE LOADING" shall be stenciled on the exterior of the vehicle. Stenciling color shall be white or yellow conforming to MIL-P-13983. Characters shall be a minimum of 3/4 inch in height.

3.1.23.2.3 Screens. Screens constructed of wire cloth, 0.047 inch diameter, 4 by 4 mesh, conforming to type I, class 1 of RR-W-360 shall be installed in access plate openings and secured with existing bolts.

3.1.24 Fire extinguishers. Fixed fire extinguisher cylinders shall have a minimum of 90 percent of rated full charge. All seals shall be intact and a DA Form 253 completed and securely attached to each cylinder (see 6.3).

3.1.25 OVE saddle. Unless otherwise specified (see 6.1), an OVE saddle shall be constructed and installed in accordance with Drawings 8674668 and 8674669. Saddle shall be painted with two coats of olive drab enamel conforming to TT-E-529.

3.2 Levels B and C. Vehicles shall be processed the same as specified for level A with the following exceptions:

3.2.1 Transmission and final drives. Transmission and final drives

Source: https://assist.dla.mil -- Downloaded: 20260-17T18:18Z
Check the source to verify that this is the current version before use.

shall be filled to operating level with lubricants in accordance with applicable drawings, specifications or lubrication orders; except when transmission contains preservative oil conforming to grade 1 of MIL-L-21260 or final drives contain grades 2 or 3 of the same preservative oil, operating level shall be attained by the addition of the applicable grade of preservative oil. Operating and preservative lubricants shall not be mixed. DD Form 1397 shall be marked to indicate type and grade of lubricant or preservative oil used.

3.2.2 Main and auxiliary engine crankcases. Engine crankcases shall be filled to operating level with oil in accordance with applicable drawings, specifications or lubrication orders, or preservative oil conforming to grades 1 or 2, as applicable, of MIL-L-21260. Operating and preservative lubricants shall not be mixed. DD Form 1397 shall be marked to indicate type and grade of preservative oil used.

3.2.3 Fuel tanks. Unless otherwise specified (see 6.1), vehicles shall be shipped without draining residual fuel from the fuel tanks.

3.2.4 Vehicle sealing.

3.2.4.1 Engine compartment. For level C only, vehicle shall be provided with an engine compartment cover of barrier material conforming to class E-3 or L-4 of UU-P-271. Cover shall be affixed to the engine grille deck. The barrier material shall extend beyond the end of the hull a minimum of four inches, extended over the edge of the vehicle, covering engine exhaust grilles, to the stationary shield and sealed. Barrier material shall be provided with grommets spaced a minimum of 16 inches apart and applied to the barrier material edge through a double thickness of the material. Cover shall be secured to the vehicle by tying with rope through the cover grommets. All sharp corners and edges beneath the cover shall be cushioned with paperboard conforming to PPP-P-291 and secured with tape conforming to UU-T-106. Cushioning shall be applied only to the immediate corner or sharp edge requiring cushioning.

3.3 All levels.

3.3.1 Loading. Vehicles shall be blocked, braced and anchored on open top cars in accordance with Section No. 1 and Section No. 6 of Association of American Railroad Publications (see 2.2). Parking brake shall be set and secured in that position.

3.3.2 Reprocessing engine after loading. If engine is operated in connection with loading or moving vehicle to loading area, the engine shall be reprocessed as specified in 3.1.9. An auxiliary fuel tank shall supply the fuel. The engine grille covers shall be removed before operation of engine, and engine warmed before vehicle is moved under its own power. After reprocessing of engine, engine grille covers shall be reinstalled and sealed as specified herein.

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

3.3.3 Marking. In addition to any special marking required herein or in the contract or order (see 6.1), vehicles shall be marked in accordance with MIL-STD-129. The information "LIFT HERE" shall be stenciled adjacent to each lifting eye, using white enamel conforming to TT-E-529. Stenciling shall be in characters a minimum of 3/4 inch high and readily visible when OVE is loaded on OVE saddle.

3.3.4 Vehicle closure water resistance. When specified (see 6.1), vehicles shall be subjected to a spray test (see 4.6.3), to determine water resistance of the vehicle closure.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First production processed and one of the next 10 production processed vehicles. The first production processed vehicle (see 3.1.1), and one of the next 10 production processed vehicles (see 3.1.2) shall be subjected to inspections specified in 4.5 through 4.6.2.

4.3 Production processed vehicles. Except as otherwise specified herein, all production processed vehicles shall be subjected to inspections specified in 4.5 through 4.5.2.3.

4.4 Rejection. Failure of the first production, one of the next 10, or any production processed vehicle to conform to the requirements of this specification shall be cause for rejection of the vehicle, and refusal to continue acceptance of vehicles, by the Government, until objective evidence has been provided, by the contractor, that corrective action has been taken to eliminate the conditions which caused rejection.

4.5 Quality conformance inspections.

4.5.1 Materials. Except for materials which have been Government inspected at the source, all materials to be used in processing of vehicles shall be inspected in accordance with the material specification; or certified inspection and laboratory test reports shall be furnished which show that materials, as furnished, conform to the detailed specification.

4.5.2 Processing. All vehicle processing shall be inspected to determine conformance to this specification. Inspection of processing shall include all items specified in table I, and 4.5.2.1 through 4.5.2.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

Table I - Processing inspection
(See indicated paragraphs for level A, level B and level C requirements)

	Cleaning	Preservation		Packaging
	Levels	Level	Levels	Levels
	A, B and C	A	B and C	A, B and C
Preparation prior to processing				3.1.4
Processing records				3.1.4.1
Disassembly		3.1.4.2	3.1.4.2	3.1.4.2
Interior of vehicle	3.1.5.1			
Battery supports and retainers	3.1.5.1.1	3.1.5.1.1	3.1.5.1.1	
Headrests, seats and protective pads	3.1.5.1.2			3.1.16
Fire control items	3.1.5.1.3			3.1.22
Fuel filter sediment bowl	3.1.5.1.4	3.1.5.1.4	3.1.5.1.4	
Exterior of vehicle	3.1.5.2			
Cannon	3.1.5.2.1	3.1.14.1 and 3.1.14.2	3.1.14.1 and 3.1.14.2	
Relubrication		3.1.6	3.1.6	
*Transmission and final drives		3.1.7	3.2.1	
*Main and auxiliary engine crankcases		3.1.8	3.2.2	
*Main engine		3.1.9	3.1.9	
Auxiliary engine		3.1.10	3.1.10	
Air cleaners		3.1.11	3.1.11	
Fuel tanks		3.1.12	3.2.3	
*Turret ring bearing		3.1.13	3.1.13	
**Exercising of recoil mechanism		3.1.14.3	3.1.14.3	
Processing of recoil mechanism after exercising		3.1.14.3.1	3.1.14.3.1	
Exercising of replenisher		3.1.14.4	3.1.14.4	
Processing of replenisher after exercising		3.1.14.4.1	3.1.14.4.1	
Cannon mounts		3.1.14.5	3.1.14.5	
Miscellaneous armament and related items		3.1.14.6	3.1.14.6	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

Table I - Processing inspection (cont'd)
(See indicated paragraphs for level A, level B and level C requirements)

	Cleaning	Preservation		Packaging
	Levels	Level	Levels	Levels
	A, B and C	A	B and C	A, B and C
Covers				3.1.15
Dry charge batteries and cables				3.1.17.1
Electrolyte				3.1.17.2
Miscellaneous preservation		3.1.18	3.1.18	
On vehicle equipment		3.1.19	3.1.19	3.1.19
Record forms				3.1.20
Hatches and doors		3.1.21	3.1.21	
Ballistic drive, periscope and telescope mounts		3.1.22.2	3.1.22.2	
Vehicle sealing		3.1.23	3.1.23	3.1.23 and 3.2.4
Fire extinguishers				3.1.24
OVE saddle		3.1.25	3.1.25	3.1.25
Loading				3.3.1
Reprocessing engine after loading		3.3.2	3.3.2	
Marking				3.3.3

*Inspect DD Form 1397
**Inspect DA Form 2408-4 and DA Form 2408-9

4.5.2.1 Cleaning. To determine conformance to 3.1.5.1, interior of vehicles shall be examined for cleanliness, and one vehicle each day tested for cleanliness in accordance with the applicable provisions of MIL-P-116. To determine conformance to 3.1.5.2, exterior of vehicle shall be examined for cleanliness. Surfaces to which tape is to be applied shall be examined for cleanliness before applying tape.

4.5.2.2 Cannon. Cannon shall be examined to determine condition and effectiveness of processing. When reprocessing has been accomplished, it shall be examined for conformance to 3.1.14.2.

4.5.2.3 Fuel tanks. To determine conformance to 3.1.12, interior of fuel tanks shall be examined and visual inspection shall assure that complete processing, as specified, has been accomplished.

4.6 Tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

4.6.1 Coating compound thickness. A minimum of one vehicle per day shall be inspected for thickness of coating compound to determine conformance to 3.1.3.3. After four hours of drying, four 1 inch square specimens of barrier material shall be cut from areas (flat and contour) selected at random by the Government representative, and measured for specified thickness.

4.6.2 Fuel and oil mixture test. When preservative oil conforming to MIL-L-21260 is reused for processing of fuel tanks, the drained preservative oil from one out of every five vehicles shall be tested to determine conformance to 3.1.12. An American Petroleum Institute (API) hydrometer shall be used to measure dilution of preservative oil with fuel. Indicated degrees shall be converted to percent dilution in accordance with the following:

Percent dilution	A.P.I. degrees
0	23.0°
5	24.4°
10	26.4°

4.6.3 Spray test. Prior to spray test, drain plug shall be removed and any accumulation of water drained, then drain plug reinstalled. Areas within reach from exterior of vehicle around access and inspection openings shall be examined to assure removal of moisture. Vehicle shall be subjected to a continuous spray of water for four hours, produced by means of nozzles located five feet from vehicle surfaces. One nozzle shall be provided for each 10 square feet of vehicle surface, front, rear, sides and top. Water shall not be directed at any surface below bottom edge of closure. Nozzles shall be standard spray nozzles with single 3.5 MM orifice. Water pressure of spray shall be 60 pounds per square inch (psi) measured at nozzle.

4.6.3.1 Evaluation. Exterior surfaces near hatches and other sealed areas shall be wiped dry before deprocessing for evaluation. Vehicle closure shall be removed from vehicle. Interior of closure and exterior vehicle surfaces within closure shall be examined for any indication of water. Interior of vehicle shall be examined for any accumulation of water and if any is present the cause of water leakage determined.

5. PREPARATION FOR DELIVERY

This section is not applicable to this specification.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Selection of applicable level of processing (see 1.2).
(c) If inspection of the first production processed vehicle is other than specified (see 3.1.1).
(d) Type of vehicle closure required (see 3.1.23).

Source: https://assist.dla.mil -- Downloaded: 20261-17T18:18Z
Check the source to verify that this is the current version before use.

(e) If OVE saddle is not required (see 3.1.25).
(f) If draining of residual fuel from fuel tanks is required (see 3.2.3).
(g) If any special marking is required (see 3.3.3).
(h) If spray test is required (see 3.3.4).

6.2 Forms. A copy of "The Equipment Log Book" and all required forms will be furnished the contractor by the Government at least 30 days before shipment of the equipment as required by the contract delivery schedule (see 3.1.20).

6.3 Safety precautions. Caution should be exercised in handling carbon dioxide (CO_2) fire extinguisher cylinders. Cylinders should not be dropped, permitted to strike each other, or be handled roughly. Extreme care should be exercised during the reinstallation operation to avoid tripping fire extinguisher control system (see 3.1.24).

Custodian:

Army - AT

Preparing activity:

Army - AT

Project No. 2350-A158

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

APPENDIX I

REQUIREMENTS FOR ASSEMBLY, INSTALLATION, REMOVAL, DISASSEMBLY AND PRESERVATION, PACKAGING AND PACKING OF VEHICLE CLOSURE FOR M41, M41A1, M41A2 and M41A3 VEHICLES

10. SCOPE

10.1 Scope. This appendix covers requirements for fabrication, assembly, installation, removal and disassembly of the vehicle closure (see 3.1.23); and the preservation, packaging and packing of the disassembled vehicle closure.

20. APPLICABLE DOCUMENTS

20.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this appendix to the extent specified herein.

SPECIFICATIONS

Federal

V-F-106	-	Fasteners, Slide, Interlocking.
V-T-295	-	Thread, Nylon.
MM-L-751	-	Lumber, and Timber, Softwood.
QQ-A-200/8	-	Aluminum Alloy Bar, Rod, Shapes, and Tube, Extruded, 6061 and 6062.
QQ-A-225/8	-	Aluminum Alloy Bar, Rod, Wire, and Special Shapes; Rolled, Drawn, or Cold Finished, 6061.
QQ-S-634	-	Steel, Bar, Carbon, Cold Finished (Standard Quality).
QQ-S-698	-	Steel, Sheet and Strip, Low-Carbon.
QQ-T-825	-	Tube, Steel, Alloy; Mechanical, Round, Seamless and Welded.
QQ-T-830	-	Tube, Steel, (Carbon, Mechanical; Seamless and Welded).
TT-C-490	-	Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-E-485	-	Enamel, Semi-Gloss, Rust-Inhibiting.
TT-P-636	-	Primer Coating, Alkyd, Wood and Ferrous Metal.
TT-W-568	-	Wood Preservative; Creosote-Petroleum Solution.

Military

MIL-W-530	-	Webbing and Tape, Textile, Cotton, General Purpose, Natural or in Colors.
MIL-C-5651	-	Cord; Elastic, Exerciser and Shock Absorber for Aeronautical Use.
MIL-S-13281	-	Steel: Carbon, Alloy and High Strength Low Alloy, for Welded Structures.

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

MIL-E-15599 - Electrodes, Welding, Covered; Low-and Medium-Carbon Steel.
MIL-C-20696 - Cloth, Coated, Nylon, Waterproof.

STANDARDS
Federal
Fed. Std. No. 751 - Stitches, Seams, and Stitchings.

Military
MIL-STD-1261 - Welding Procedures for Constructional Steels.
MS15795 - Washers, Flat-Metal, Round, General Purpose.
MS35223 - Screw, Machine, Pan Head, Slotted, Carbon Steel, Cadmium Plated, NC-2A and UNC-2A.
MS35338 - Washer, Lock-Spring, Helical, Regular (Medium) Series.
MS35425 - Nut, Plain, Wing, UNC-2B.
MS35690 - Nut, Plain, Hexagon, UNC-2B and UNF-2B.
MS51967 - Nut, Plain, Hexagon-Carbon Steel, Cadmium Plated, UNC-2B.
MS51968 - Nut, Plain, Hexagon-Carbon Steel, Cadmium Plated, UNF-2B.
MS90725 - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Medium Carbon Steel, Cadmium Plated, UNC-2A.
MS90726 - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Medium Carbon Steel, Cadmium Plated, UNF-2A.

DRAWINGS
Army
127865 - Screw, Set, Square Head.
129544 - Screw, Wood, Flat Head.
190285 - Fastener, Stud.
425935 - Fastener, Eyelet.
425936 - Fastener, Socket.
425937 - Fastener, Button.
501285 - Strap, Webbing.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

30. REQUIREMENTS

30.1 Frame and cover. The vehicle closure shall consist of a frame assembly (figure 8A) and a cover assembly (figure 79A). The cover assembly shall be attached after the frame assembly has been installed on the vehicle.

30.1.1 Frame assembly. The frame assembly components may be constructed from aluminum or steel as indicated by the optional material callouts on the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

detail figure drawings. Caution shall be used in the fabrication of an assembly using both materials, to avoid contact of dissimilar metals. All screws in the frame assembly shall be installed with the threaded end pointing down or toward the center of the assembly.

Instructions for assembly and installation of the frame are as follows:

(a) Assemble the front and rear frame assembly in accordance with figure 38C.
(b) Assemble the left and right frame assembly in accordance with figure 38B.
(c) Complete assembly in accordance with figure 38A.
(d) Install assembled frame to vehicle in accordance with figures 8A, and 9A through 13.
(e) All sharp corners of framework and bows where cloth cover will make contact, such as corners of the base of the frame, shall be cushioned with a minimum of two thicknesses of cushioning material conforming to class A of PPP-C-843, secured in place with tape conforming to type II of UU-T-106.

30.1.2 Cover assembly. Cover assembly shall be fabricated and installed in accordance with figures 79A through 119.

30.1.2.1 Marking. The information "TO LIFT VEHICLE FOR LOADING, UNFASTEN AND ROLL COVER FROM FRONT AND REAR BOWS EXPOSING LIFTING EYES - AFTER LOADING RECOVER AND SECURE" shall be stenciled in a conspicuous location on the front and rear of closure. Stenciling shall be in characters a minimum of 3/4 inch high, using white enamel conforming to TT-E-529. The information "CLOSURE KIT, VEHICLE PROTECTIVE - M41 - M41A1 - M41A2 - M41A3 - DO NOT DESTROY - REINSTALL FOR SHIPMENT OR STORAGE OR SHIP WITH OVE" shall be stenciled in a conspicuous location on one end and one side of closure. Stenciling shall be in characters a minimum of two inches high, using white enamel conforming to TT-E-529.

30.2 Removal and disassembly. The vehicle closure shall be removed and disassembled in the reverse manner of installation (see 30.1.1).

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

FIGURES 1 THROUGH 6 NOT USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST- WATERSHED FRAME & COVER ASSEMBLY

FIG.	PART NAME	REQ'D.	SIZE	MAT'L.	SPEC.
14	SPACER	2	3/8 X 2. X 7.	STEEL	QQ-S-634
15	ANGLE	2	∠3. X 3. X 1/4 X 4. LG.	STEEL	MIL-S-13281
17	BRACKET ASSY.	2	ASSEMBLY		
18	SUPPORT, LOWER	2	∠3. X 3. X 1/4 X 11 5/8 LG.	STEEL	MIL-S-13281
19	SUPPORT, UPPER	2	1/4 X 3 7/16 X 7. LG.	STEEL	QQ-S-634
21	BRACKET ASSY.	8	ASSEMBLY		
22	BRACKET	8	1/4 X 1. X 7 1/2 LG.	STEEL	QQ-S-634
23	SUPPORT	8	1/4 X 2. X 6 3/4 LG.	STEEL	QQ-S-634
29	SUPPORT ASSY.	2	ASSEMBLY		
30	CLAMP	4	1/4 X 1 1/2 X 12. LG.	STEEL	QQ-S-634
31	PLATE	2	1/4 X 3. X 3 1/2		
32	ANGLE	2	∠1 1/4 X 1 1/4 X 1/4 X 10. LG.	STEEL	MIL-S-13281
34	SUPPORT ASSY.	2	ASSEMBLY		
35	SUPPORT	2	3/16 X 2. X 10 3/4 LG.	STEEL	QQ-S-634
36	STIFFENER	2	∠1 1/2 X 1 1/2 X 1/8 X 5 1/2 LG	STEEL	MIL-S-13281
38	FRAME ASSY.	1	ASSEMBLY		
39	BEAM, SIDE	4	2. X 4. X 68. LG.	WOOD	MM-L-751
40	BEAM, SIDE	2	2. X 4. X 101 3/4 LG.	WOOD	MM-L-751
41	BEAM	4	2. X 4. X 64 5/8 LG.	WOOD	MM-L-751
42	CONNECTOR	6	2. X 4. X 3/16 X 8 LG.	STEEL	QQ-T-830
43	TUBE, SIDE	4	1-O.D. X .065 X 60 LG.	STEEL	QQ-T-830
44	BOW, TOP	9	1 1/8-O.D. X .049 X 100	STEEL	QQ-T-830
45	TUBE, END	6	1-O.D. X .065 X 78	STEEL	QQ-T-830
46	TUBE, INTERMED.	3	1.-O.D. X .065 X 81 1/8	STEEL	QQ-T-830
47	CONNECTOR	6	1 1/8-O.D. X .049 X 8.	STEEL	QQ-T-830
48	BOW, SUPPORT	4	1 1/8-O.D. X .049 X 78	STEEL	QQ-T-830

FIGURE 6A

Source: https://assist.dla.mil -- Downloaded: 20260-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST- WATERSHED FRAME & COVER ASSEMBLY

FIG	PART NAME	REQ	SIZE	MATERIAL	SPEC.
49	TUBE, SUPPORT	8	1.0D x .065 x 56 LG	STEEL	QQ-T-830
50	BRACE	8	1.0D. x .065 x 39 LG	STEEL	QQ-T-830
52	PLATE ASSY.	4	ASSEMBLY		
53	PLATE	8	1/4 x 8. x 8 LG	STEEL	QQ-S-631
54	TUBE	4	1 1/4 OD x .109 x 8 1/2	STEEL	QQ-T-830
56	TUBE ASSY	4	ASSEMBLY		
57	TUBE, SIDE	4	1.00 x .065 x 60 LG	STEEL	QQ-T-830
58	BRACKET	14	1/8 x 2. x 12 1/2 LG	STEEL	QQ-S-698
59	PLATE, BOTTOM	14	1/8 x 2. x 1 41/64 LG.	STEEL	QQ-S-698
61	TUBE ASSY.	4	ASSEMBLY		
62	TUBE, SIDE	4	1.0D x .065 x 60 LG	STEEL	QQ-T-830
64	TUBE ASSY	4	ASSEMBLY		
65	TUBE, SIDE	4	1.0D x .065 x 60 LG.	STEEL	QQ-T-830
67	TUBE ASSY.	2	ASSEMBLY		
68	TUBE, SIDE	2	1.0D. x .065 x 60 LG	STEEL	QQ-T-830
74	CLAMP	32	FOR 3/8 DIA. ROD		
75	ROD	4	3/8 DIA. x 83 LG	ALUMINUM	QQ-A-225/8
76	ROD	2	3/8 DIA. x 69 LG	ALUMINUM	QQ-A-225/8
77	ROD	4	3/8 DIA x 60 LG	ALUMINUM	QQ-A-225/8
79	COVER ASSY.	1	ASSEMBLY		
89	SECTION, COVER	2.	34. x 121 1/2 LG.	FABRIC	MIL-C-20696
90	SECTION, COVER	4	36. x 121 1/2 LG.	FABRIC	MIL-C-20696
91	SECTION, COVER	1	35. x 121 1/2 LG	FABRIC	MIL-C-20696
92	SECTION, COVER	2	36. x 72. LG	FABRIC	MIL-C-20696
93	SECTION, COVER	2	35. x 72 LG	FABRIC	MIL-C-20696
94	SECTION, COVER	3	33 1/4 x 60 3/4 LG	FABRIC	MIL-C-20696
95	SECTION, COVER	1	33 1/4 x 60 3/4 LG	FABRIC	MIL-C-20696
98	REINFORCEMENT	32	3 3/4 x 4 1/4 LG	FABRIC	MIL-C-20696

FIGURE 68

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST - WATERSHED FRAME & COVER ASSEMBLY

FIG.	PART NAME	REQ	SIZE	MATERIAL	SPEC.
99	WEBBING	16	2 x 2 3/4 LG.	WEBBING	MIL-W-530
100	STRIP	4	1 1/2 x 15 1/4 LG	FABRIC	MIL-C-20696
101	STRIP	4	1 1/2 x 26 3/4 LG.	FABRIC	MIL-C-20696
102	STRIP	4	1 1/2 x 33 1/4 LG.	FABRIC	MIL-C-20696
103	STRIP	4	1 1/2 x 20 3/4 LG.	FABRIC	MIL-C-20696
104	STRIP	2	1 1/2 x 22 1/2 LG.	FABRIC	MIL-C-20696
105	STRIP	3	1 1/2 x 30 1/2 LG.	FABRIC.	MIL-C-20696
106	STRIP	4	1 1/2 x 22 3/4 LG.	FABRIC	MIL-C-20696
107	STRIP	1	1 1/2 x 17. LG.	FABRIC	MIL-C-20696
108	STRIP	1	1 1/2 x 20 1/2 LG.	FABRIC.	MIL-C-20696
109	ZIPPER FLAP	2	4 1/2 x 70. LG.	FABRIC	MIL-C-20696
110	ZIPPER FLAP	1	4 1/2 x 24 5/16 LG.	FABRIC	MIL-C-20696
111	SLEEVE	1	10. x 22. LG.	FABRIC	MIL-C-20696
113	COVER, VENT.	4	ASSEMBLY		
114	SECTION, COVER	4	8 5/8 x 14 1/8 LG.	FABRIC	MIL-C-20696
115	SECTION, COVER	4	5 5/8 x 7. LG.	FABRIC	MIL-C-20696
117	FRAME, VENT	4	ASSEMBLY		
118	FRAME	4	3/16 DIA x 42 LG.	STEEL	QQ-S-634
119	ROD	16	3/16 DIA x 7 5/8 LG	STEEL	QQ-S-634

FIGURE 6C

Source: https://assist.dla.mil -- Downloaded: 20261O-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST - STANDARD HARDWARE

PART NAME	TOTAL REQ'D.	SIZE	ORD. PART NO.
SCREW, PAN HD.	52	1/4-20UNC-2AX1 1/2	MS35223-85
SCREW, PAN HD.	16	1/4-20UNC-2AX2.	MS35223-87
SCREW, PAN HD.	135	1/4-20UNC-2AX2 1/2	MS35223-89
SCREW, CAP	4	1/4-20UNC-2AX1 1/4	MS90725-10
SCREW, CAP	2	1/4-20UNC-2AX3 1/2	MS90725-20
SCREW, CAP	16	1/4-20UNC-2AX5.	MS90725-26
SCREW, CAP	10	3/8-24UNF-2AX1 1/4	MS90726-62
SCREW, SET	4	1/4-20UNC-2AX3/4	127865
WASHER, PLAIN	28-60 *	1/4 DIA.	MS15795-210
WASHER, LOCK	221	1/4 DIA.	MS35338-104
WASHER, LOCK	2	3/8 DIA.	MS35338-107
NUT, WING	221	1/4-20UNC-2B	MS35425-14
NUT, HEX.	6	1/4-20UNC-2B	MS51967-1
NUT, HEX.	2	3/8-24UNF-2B	MS51968-7
SCREW, WOOD	64	#8X1 1/2 LG.	129544
FASTENER	8	11/64 LG.	425937
FASTENER	8		425936
FASTENER	8		190285
FASTENER	8	1/4 LG.	425935
GROMMET	16	#2 BRASS SPUR	
CORD, SHOCK	1	3/8 DIA. X 24 FT.	
ZIPPER	2	SIZE H, 64 LG.	V-F-106 CLASS B
ZIPPER	1	SIZE H, 20 LG.	V-F-106 CLASS B
STRAP	1	5/8 WIDE X 20 LG.	501285

* MAXIMUM AMOUNT REQUIRED FOR SHIMMING

FIGURE 6D

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST-INSTALLATION WATERSHED FRAME

ITEM NO.	FIG. NO.	PART NAME	REQ'D.
1	38	FRAME ASSEMBLY	1
2	17	BRACKET ASSEMBLY, INTERMEDIATE	2
3	30	CLAMP	2
4	14	SPACER	1
5	15	ANGLE	2
6	21	BRACKET ASSEMBLY, SIDE	8
7		SUPPORT ASSEMBLY, LEFT FRONT	1
8	29	SUPPORT ASSEMBLY, REAR	2
9	34	SUPPORT ASSEMBLY, RIGHT FRONT	1

STANDARD HARDWARE

ITEM NO.	REQ'D.	PART NAME	SIZE	ORDNANCE PART NO.
10	4	NUT, HEX.	1/4-20 UNC-2B	MS51967-1
11	2	NUT, HEX.	3/8-24 UNF-2B	MS35690-622
12	28	SCREW, PAN HD.	1/4-20 UNC-2A X 2 1/2 LG.	MS35223-89
13	4	SCREW, HEX. HD. CAP	1/4-20 UNC-2A X 1 1/4 LG.	MS90725-16
16	10	SCREW, HEX. HD. CAP	3/8-24 UNF-2A X 1 1/4 LG.	MS90726-62
17	4	SCREW, SET SQ. HD.	1/4-20 UNC-2A X 3/4 LG.	1278G5
18	28	NUT, WING	1/4-20 UNC-2B	MS35425-14
19	28-60*	WASHER, PLAIN	1/4 DIA.	MS15795-210
20	28	WASHER, LOCK	1/4 DIA.	MS35338-104
21	2	WASHER, LOCK	3/8 DIA.	MS35338-107

* MAXIMUM AMOUNT REQUIRED FOR SHIMMING OF BRACKET, FIGURE 21

FIGURE 7A

Source: https://assist.dla.mil -- Downloaded: 20260-17T18:18Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL-CARBON FS 1010 THRU FS 1025
SPEC. QQ-S-634


II STEEL
CLASS A
SPEC. MIL-S-13281
3.X3.X 1/4 ANGLE

PROTECTIVE FINISH NOTE:

I PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 7B


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

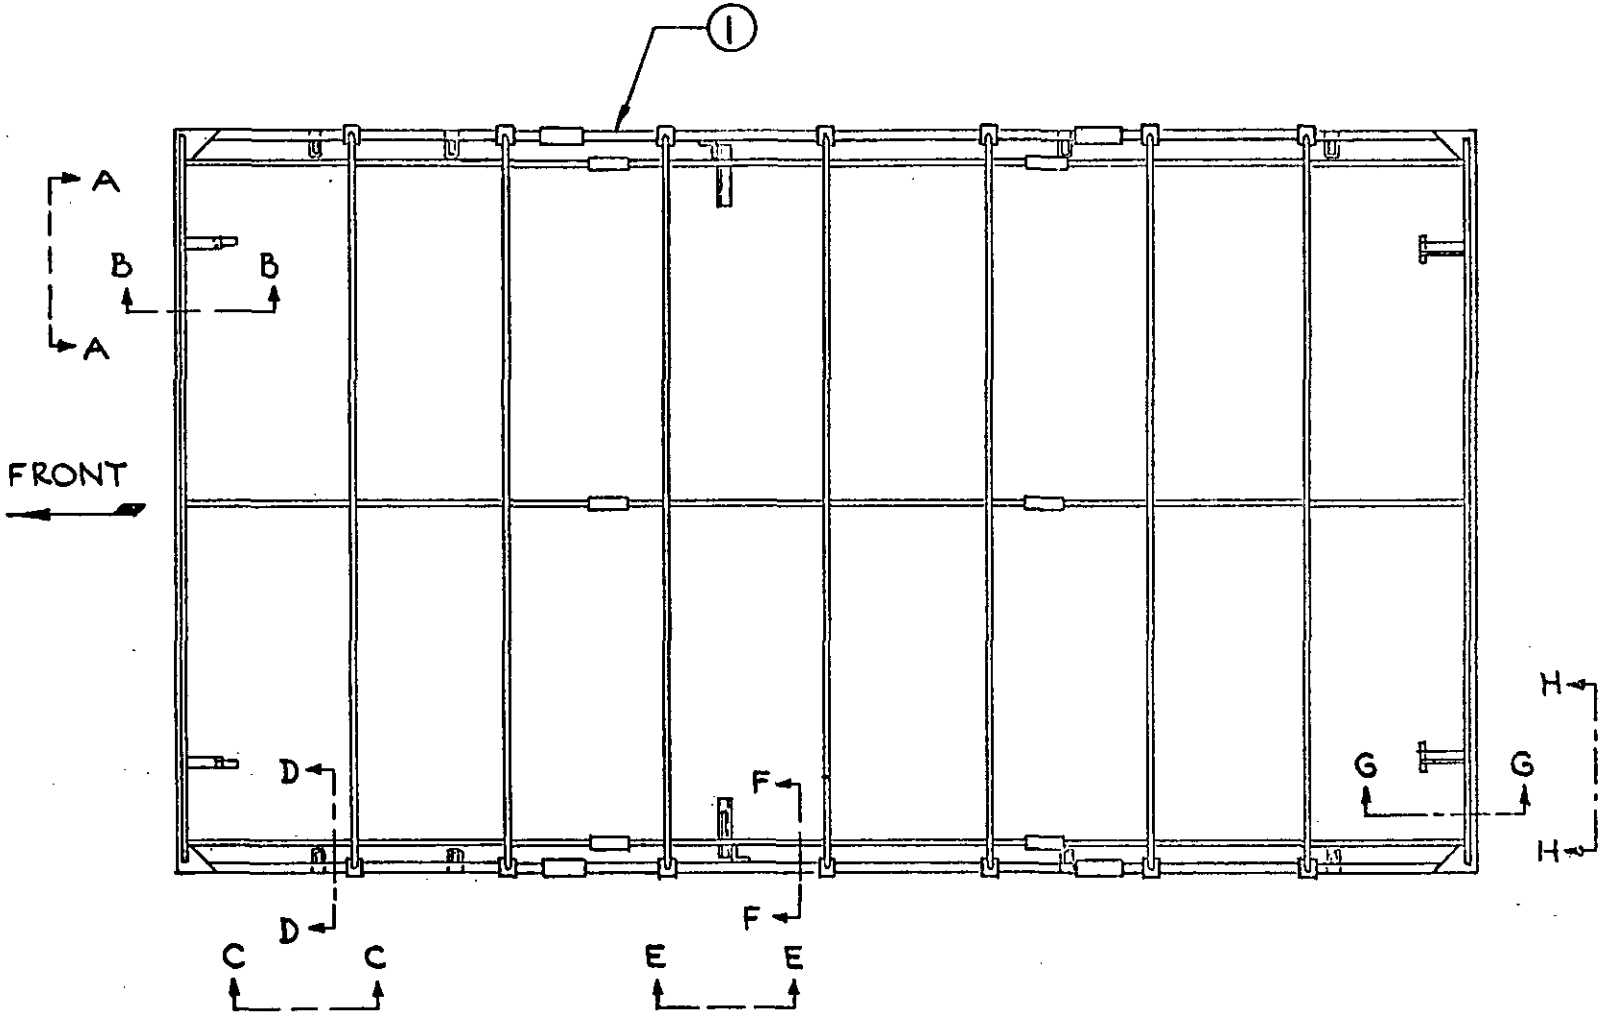

FOR SECTIONS AND VIEWS
SEE FIGURES 9, 10, 11 & 12

FIGURE 8A
INSTALLATION WATERSHED
FRAME

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

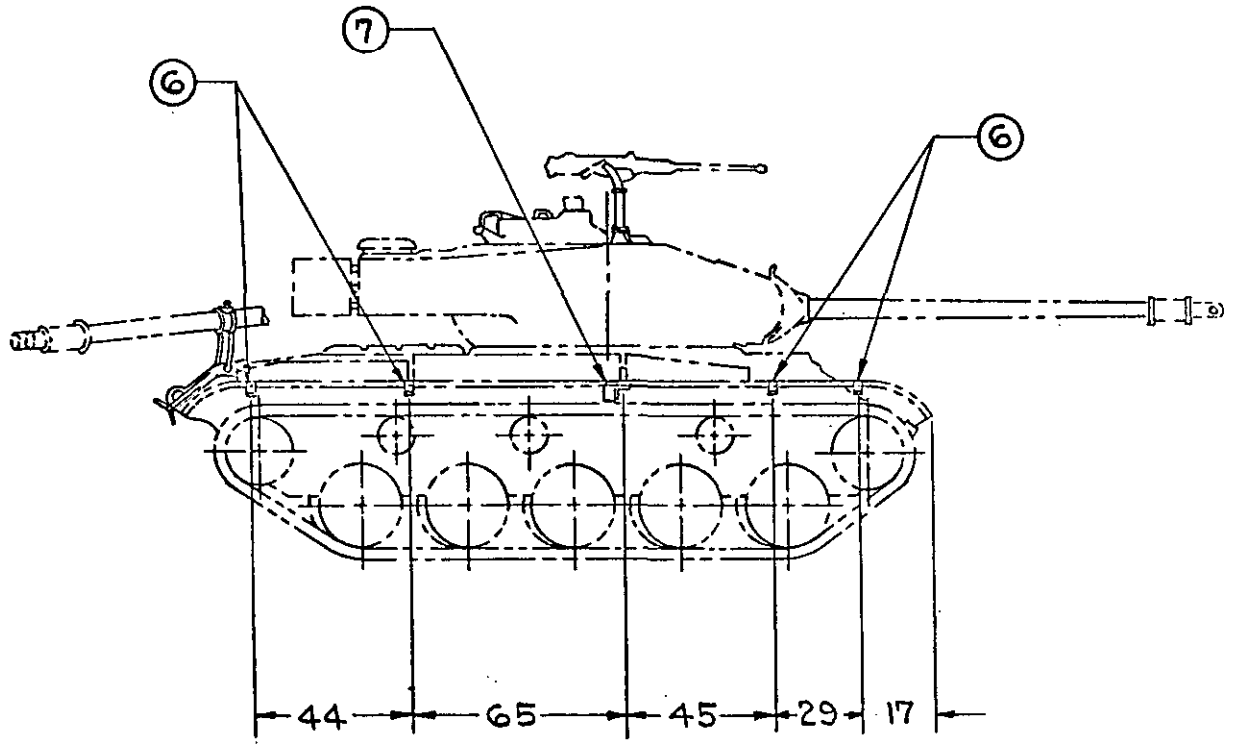


DIMENSIONS ARE APPROX.

FRAME ASSY. REMOVED TO SHOW BRACKET LOCATIONS

FIGURE 8B
INSTALLATION WATERSHED FRAME - LEFT ELEVATION

Source: https://assist.dla.mil -- Downloaded: 2020-10-17T18:18Z
Check the source to verify that this is the current version before use.

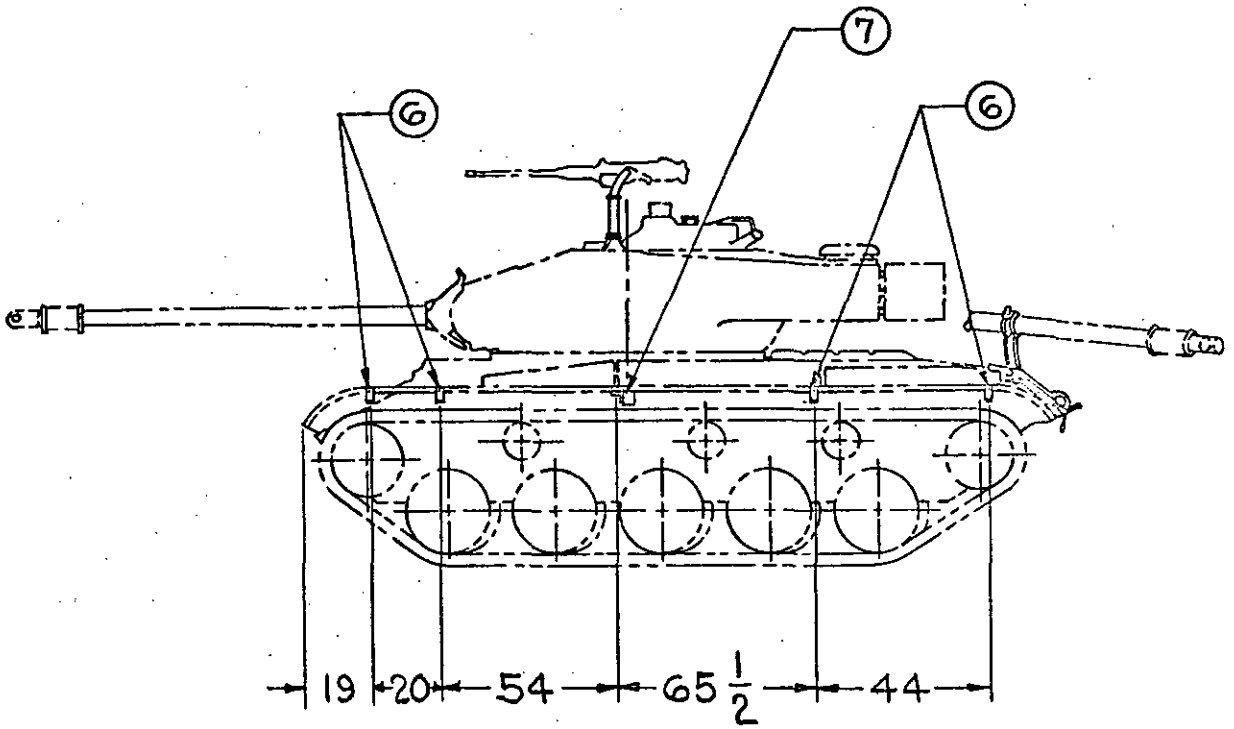


DIMENSIONS ARE APPROX.

FRAME ASSY. REMOVED TO SHOW BRACKET LOCATIONS

FIGURE 8C
INSTALLATION WATERSHED FRAME-RIGHT ELEVATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

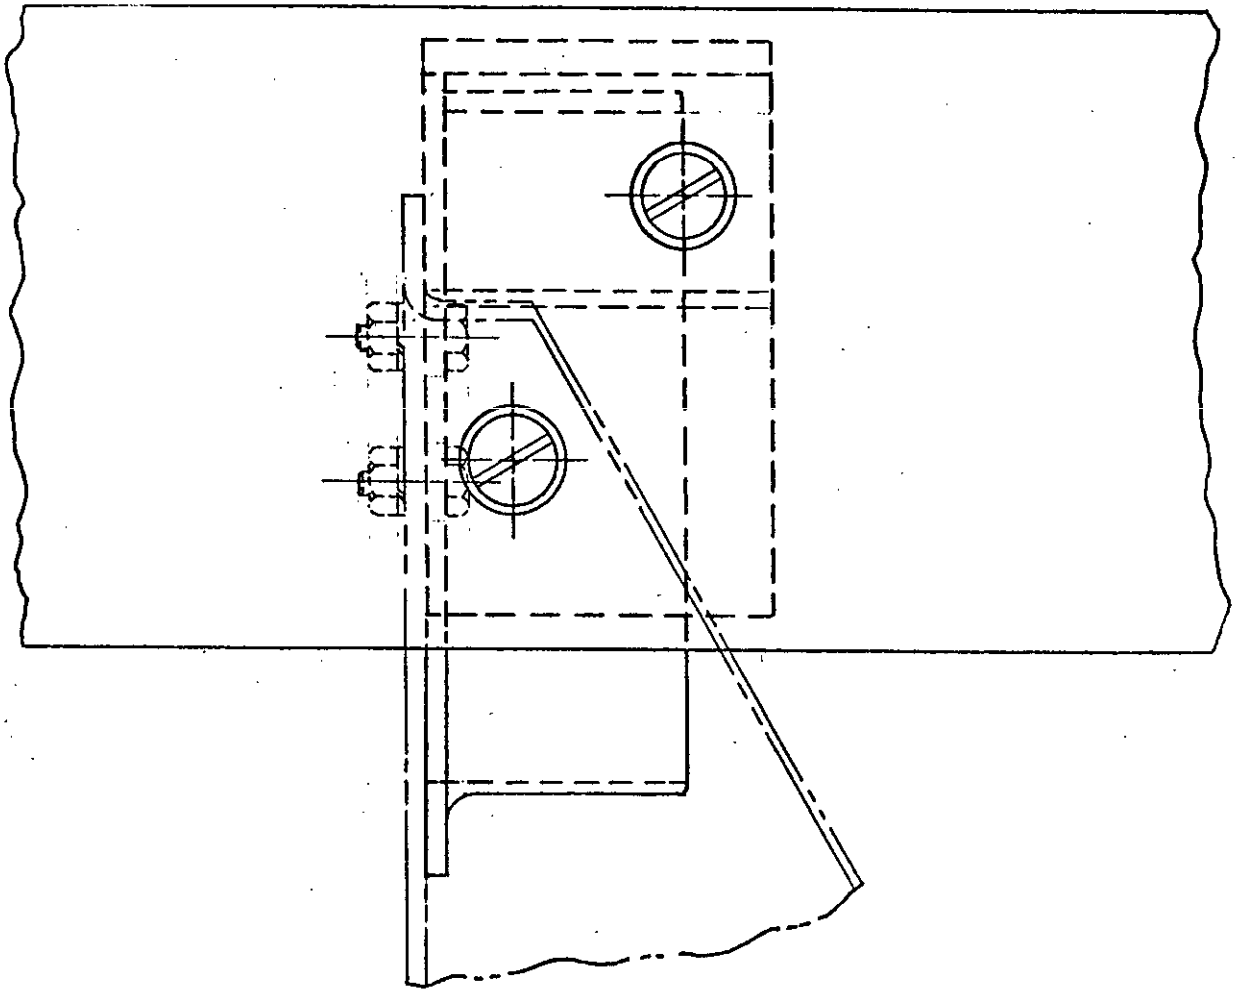

VIEW A-A

FIGURE 9A

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.



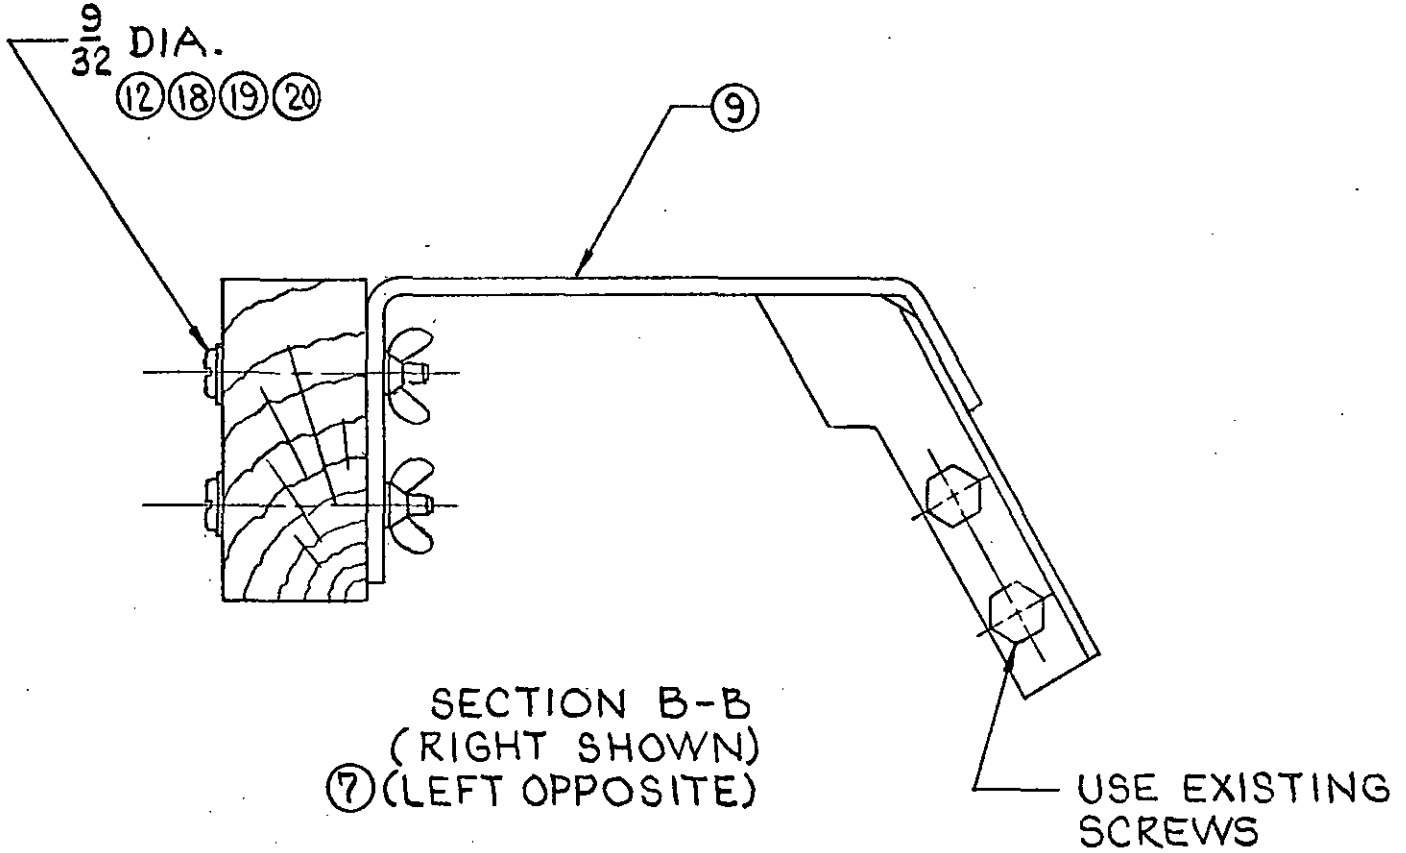


FIGURE 9B

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

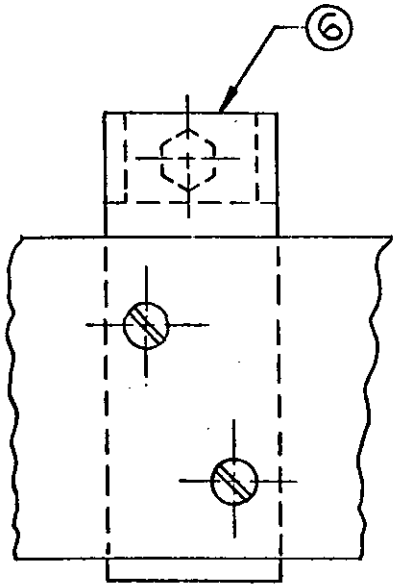


VIEW C-C
(TYP. 8 PLACES)

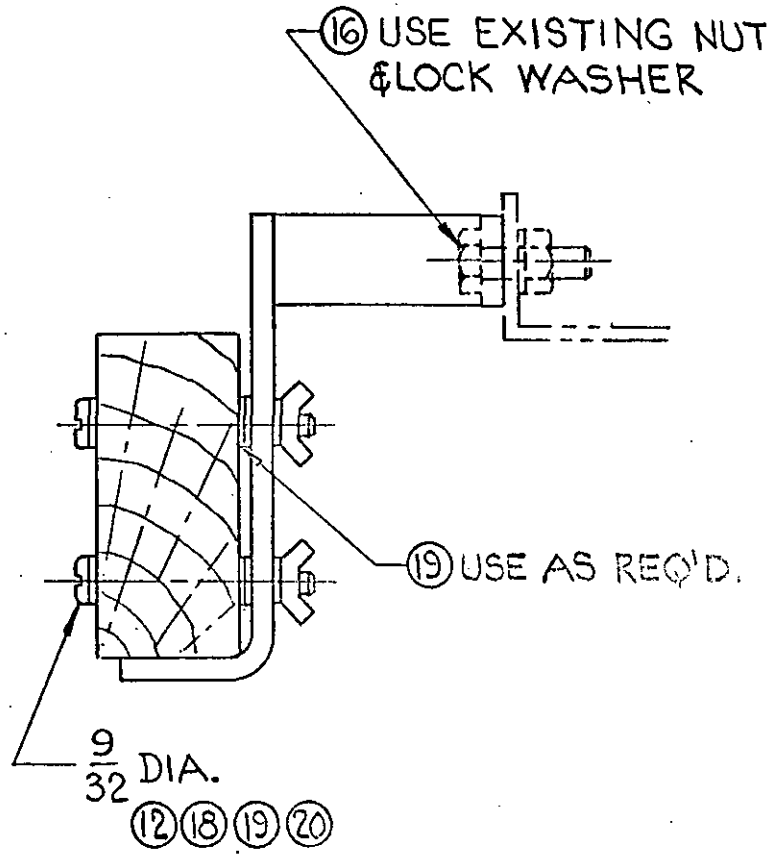

SECTION D-D
(TYP. 8 PLACES)

FIGURE 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

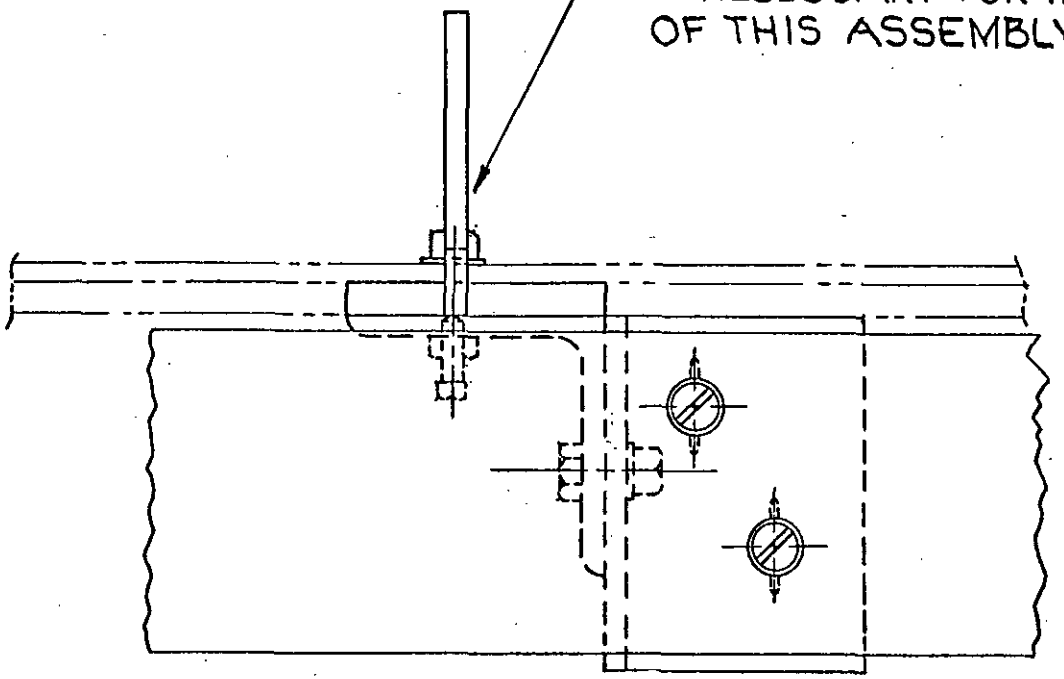

VIEW E-E

FIGURE 11A

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.



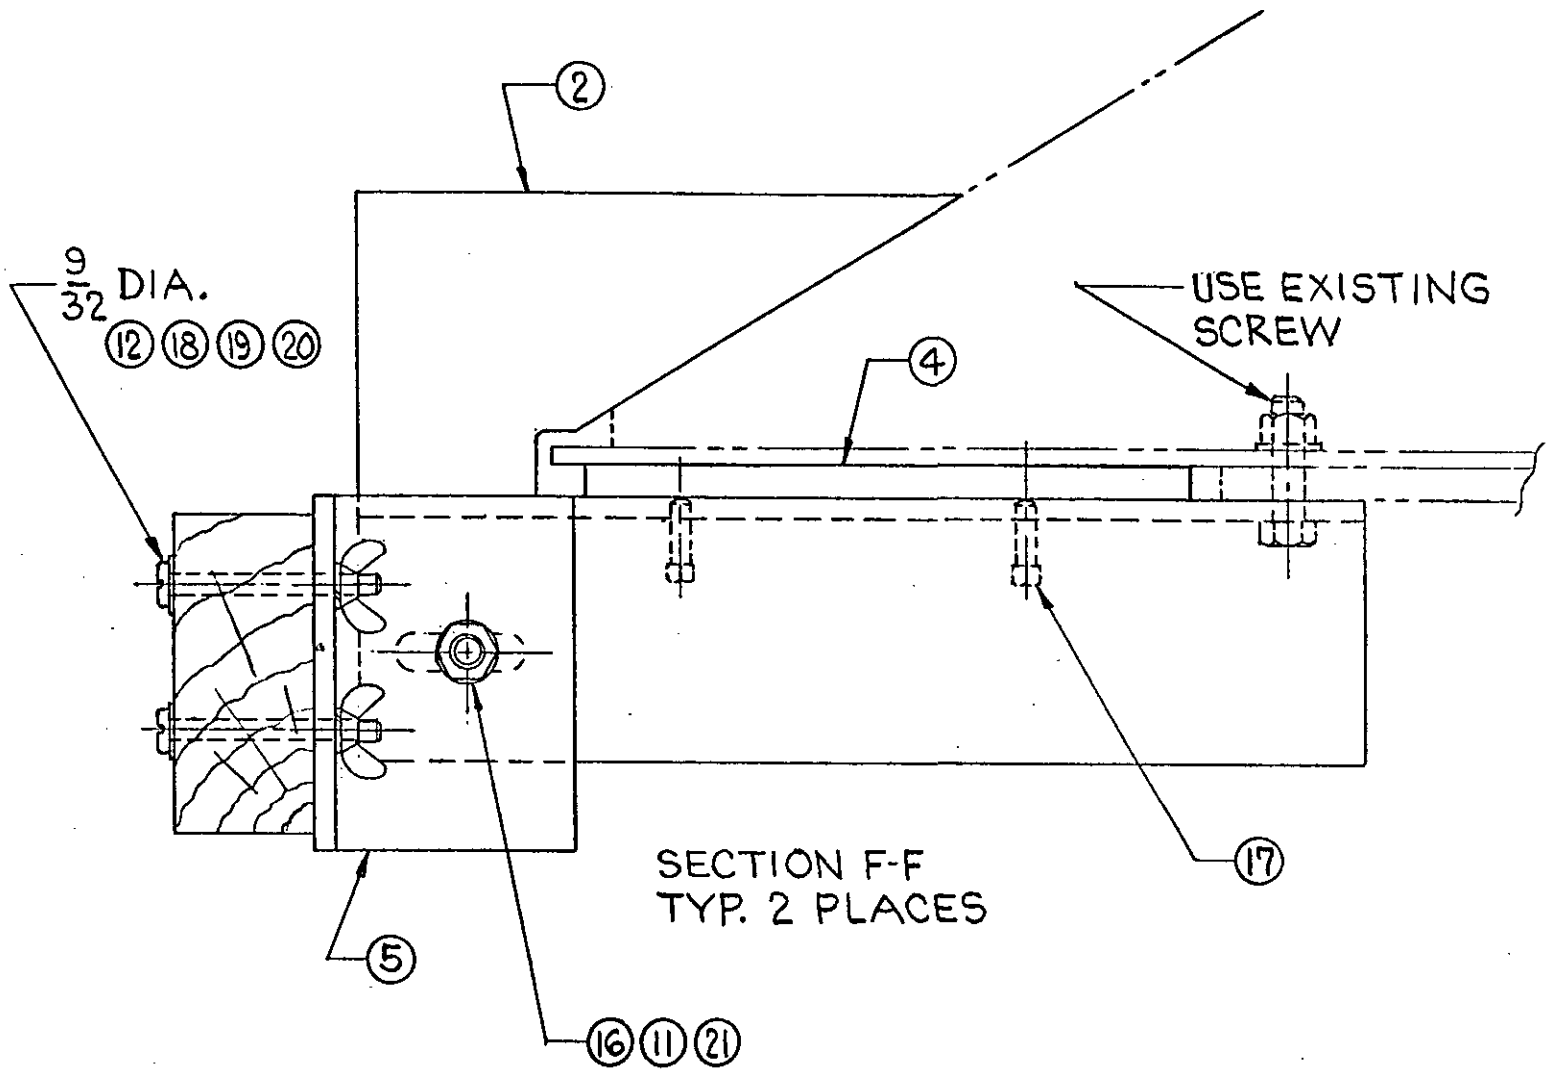


FIGURE 11B

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

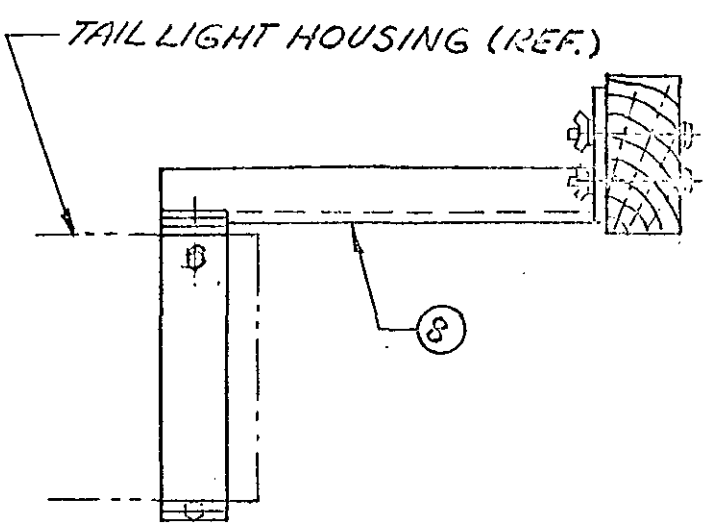

SECTION G-G
TYP 2 PLACES

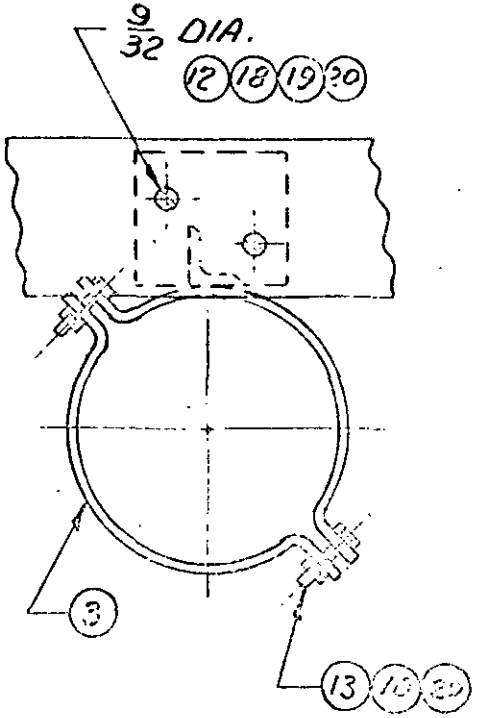

VIEW H-H
TYP. 2 PLACES

FIGURE 12

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.


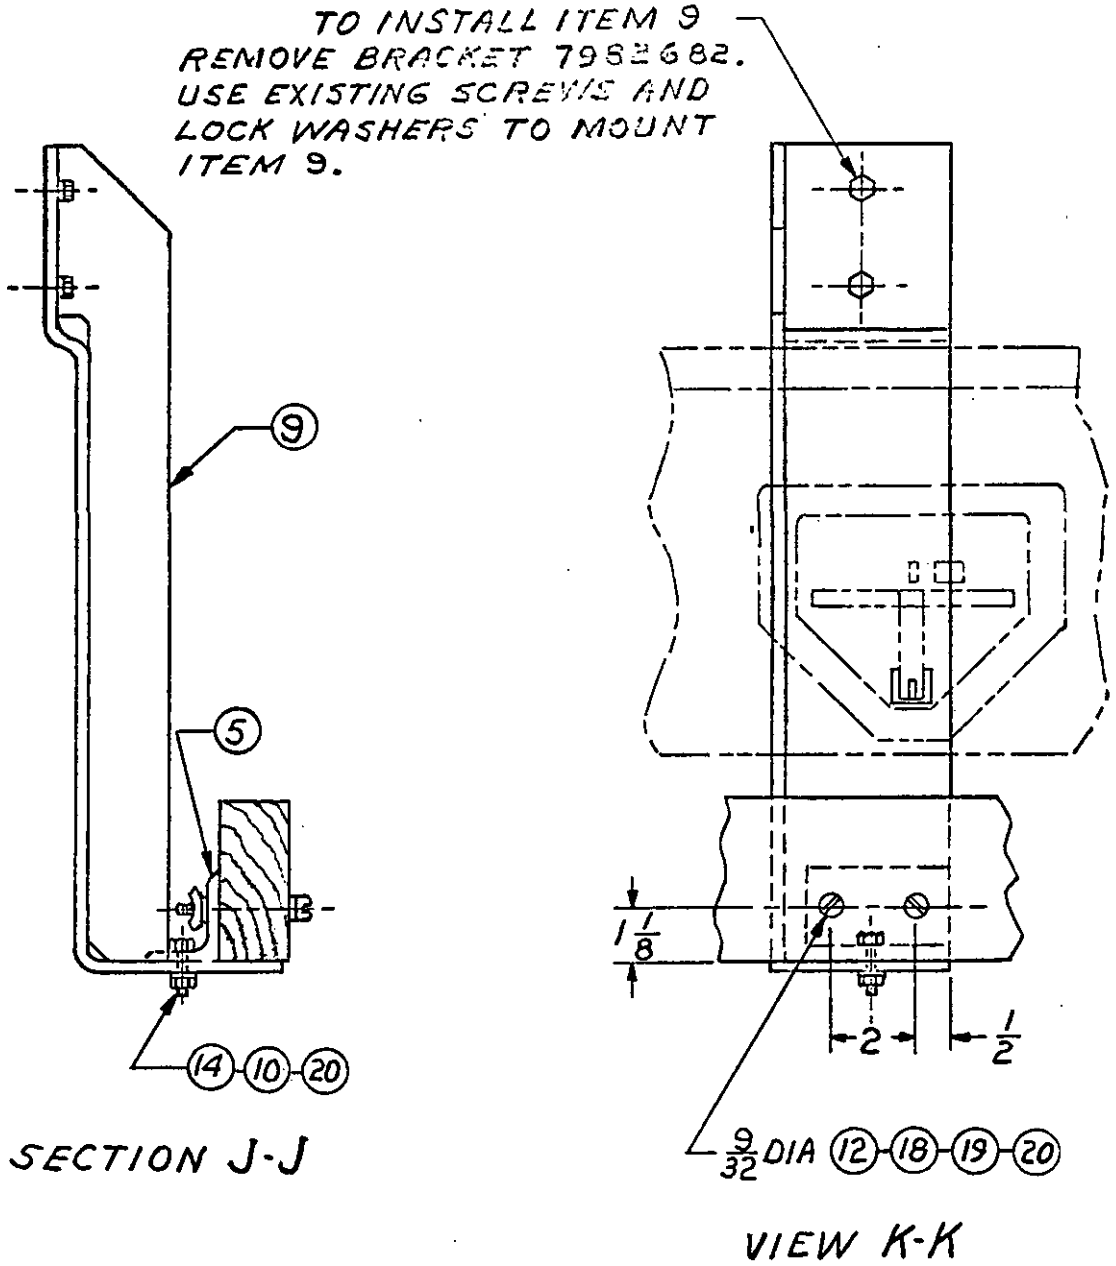


FIGURE 13

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

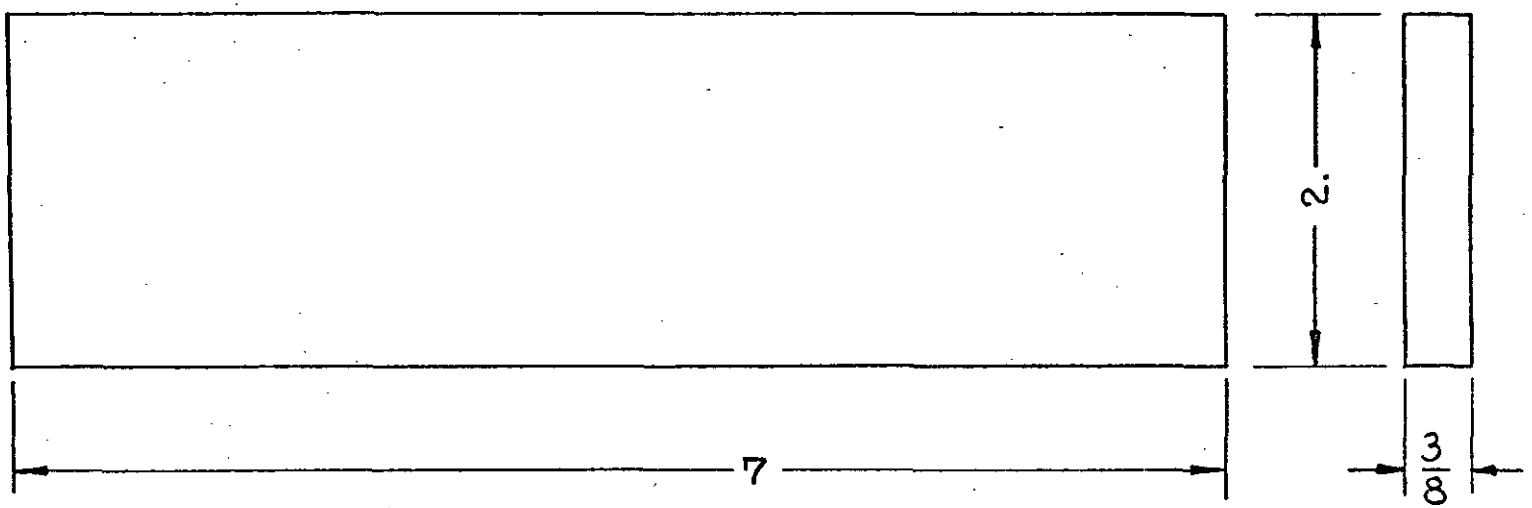


PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 7

MATERIAL NOTE:
SEE NOTE I, FIG. 7

FIGURE 14
SPACER

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

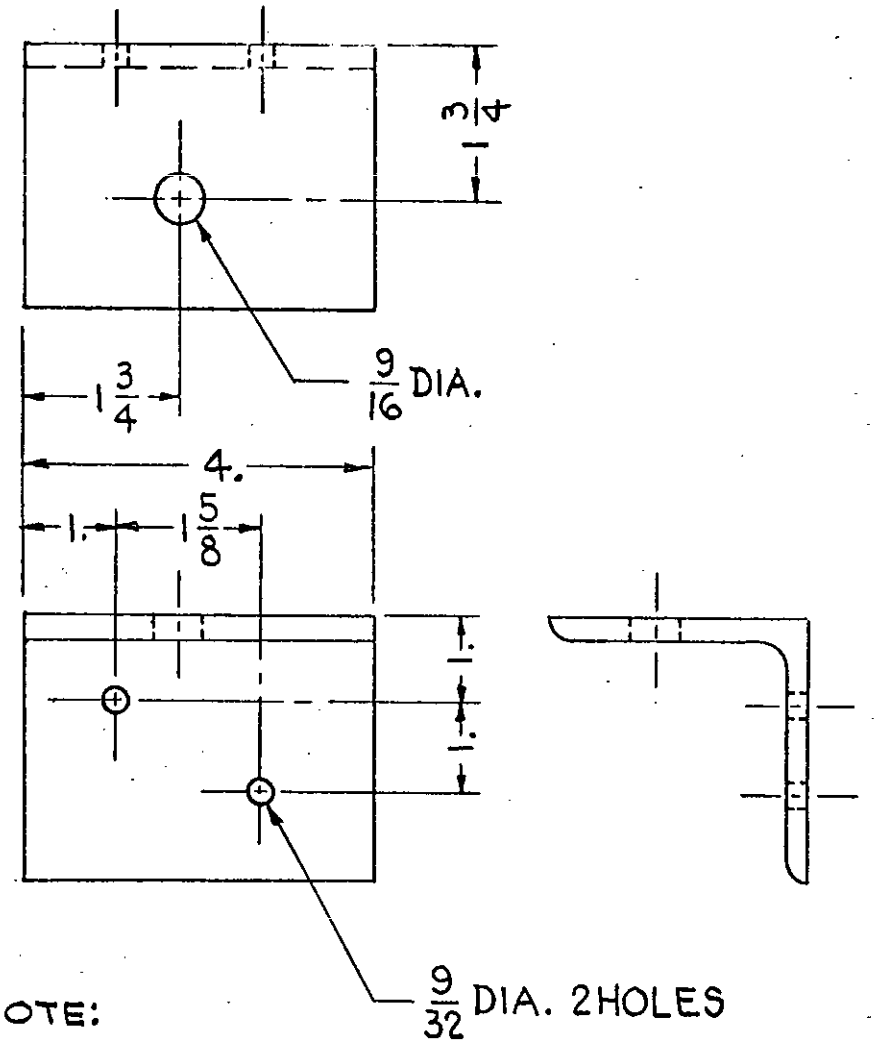

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 7

MATERIAL NOTE:
SEE NOTE II, FIG. 7

FIGURE 15
ANGLE FRAME MOUNTING

Source: https://assist.dla.mil -- Downloaded: 2026-01-17T18:16Z
Check the source to verify that this is the current version before use.

PARTS LIST - BRACKET ASSEMBLY, INTERMEDIATE

ITEM NO.	FIG. NO.	PART NAME	REQ'D.
1	18	SUPPORT, UPPER HALF	1
2	19	SUPPORT, LOWER HALF	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL - CARBON FS1010 THRU FS 1025
SPEC. QQ-S-634

II STEEL
CLASS A
SPEC. MIL-S-13281
3. X 3. X 1/4 ANGLE

WELDING NOTE - STEEL


I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

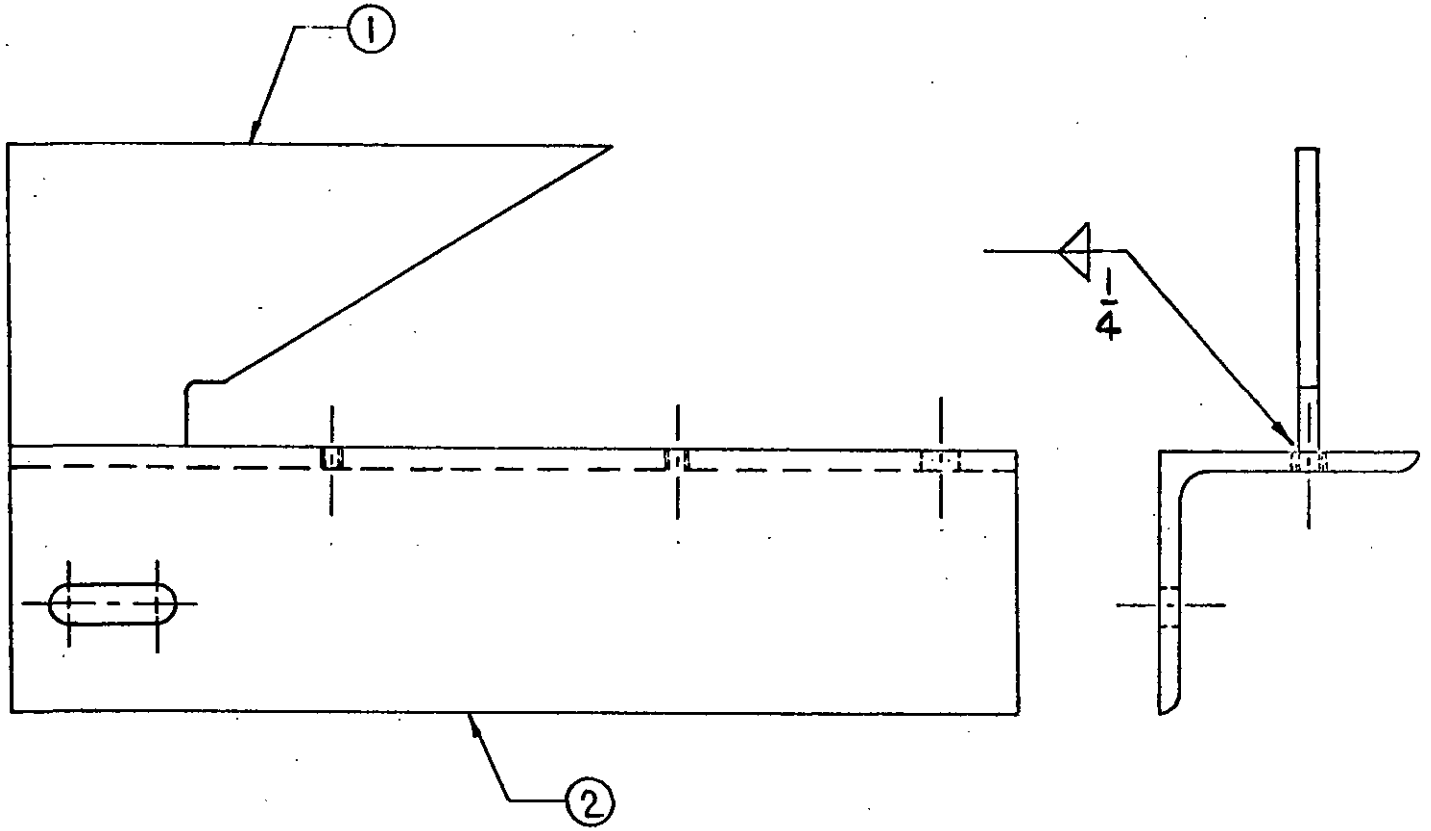


PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 16

WELDING NOTE:
SEE NOTE I, FIG. 16

FIGURE 17
BRACKET ASSY. INTERMEDIATE


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

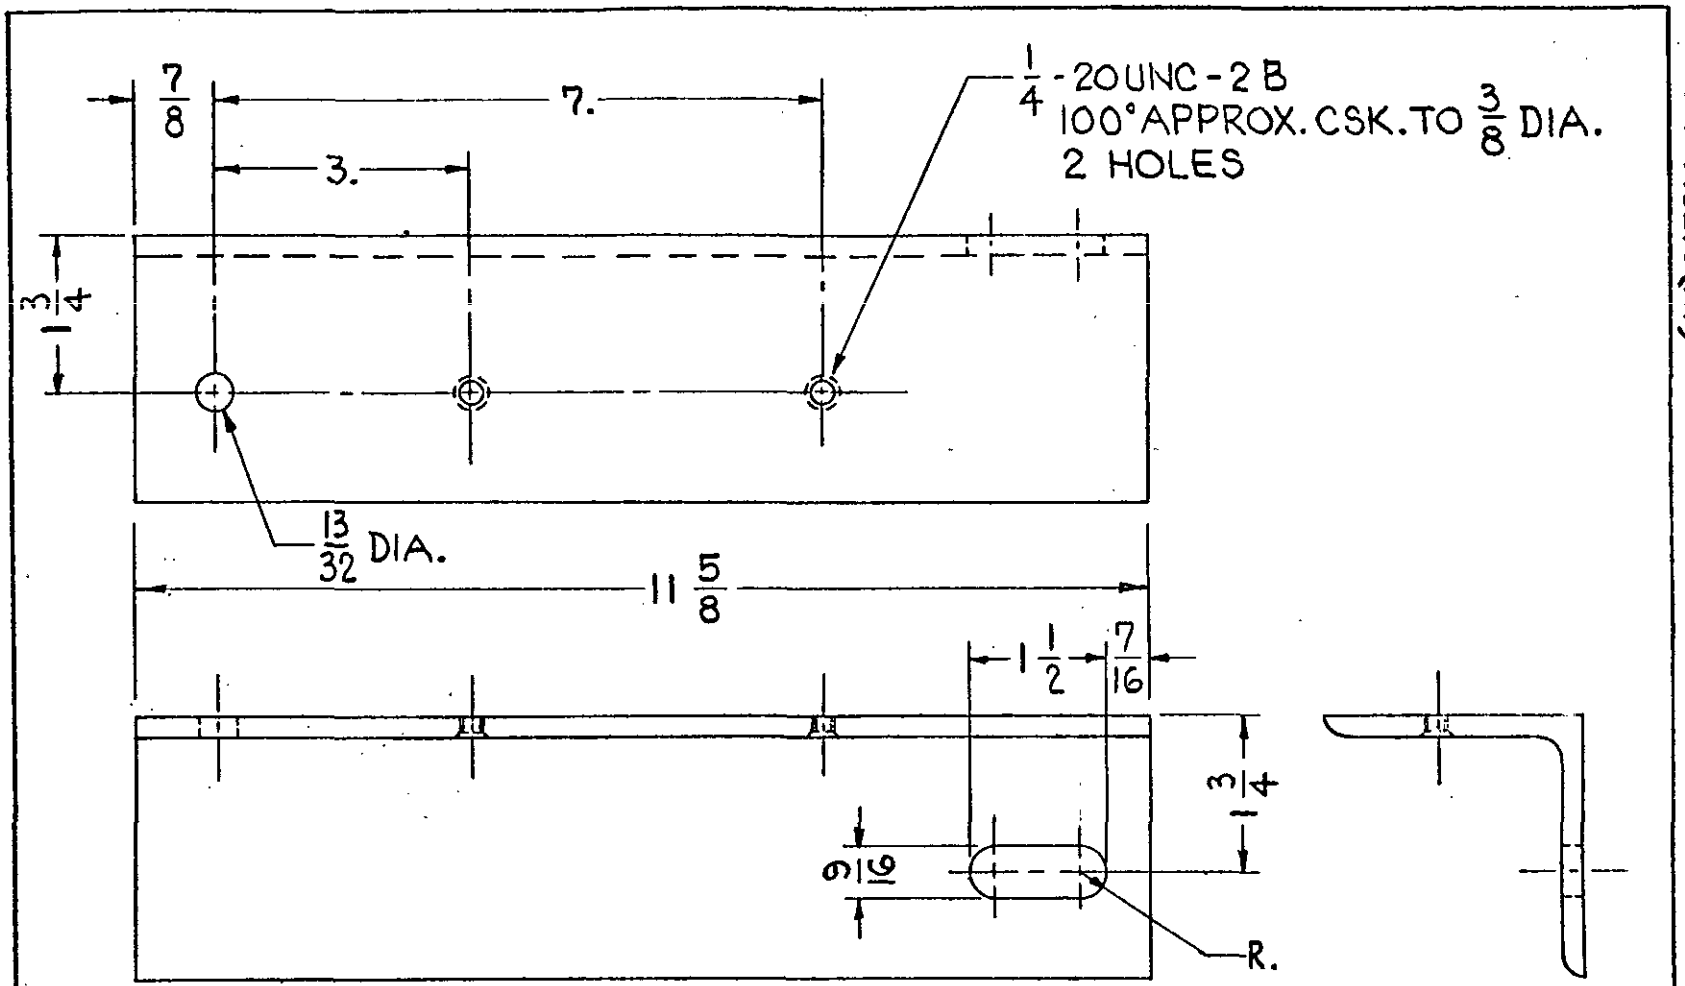

MATERIAL NOTE:
SEE NOTE II FIG. 16

FIGURE 18
SUPPORT, LOWER HALF

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

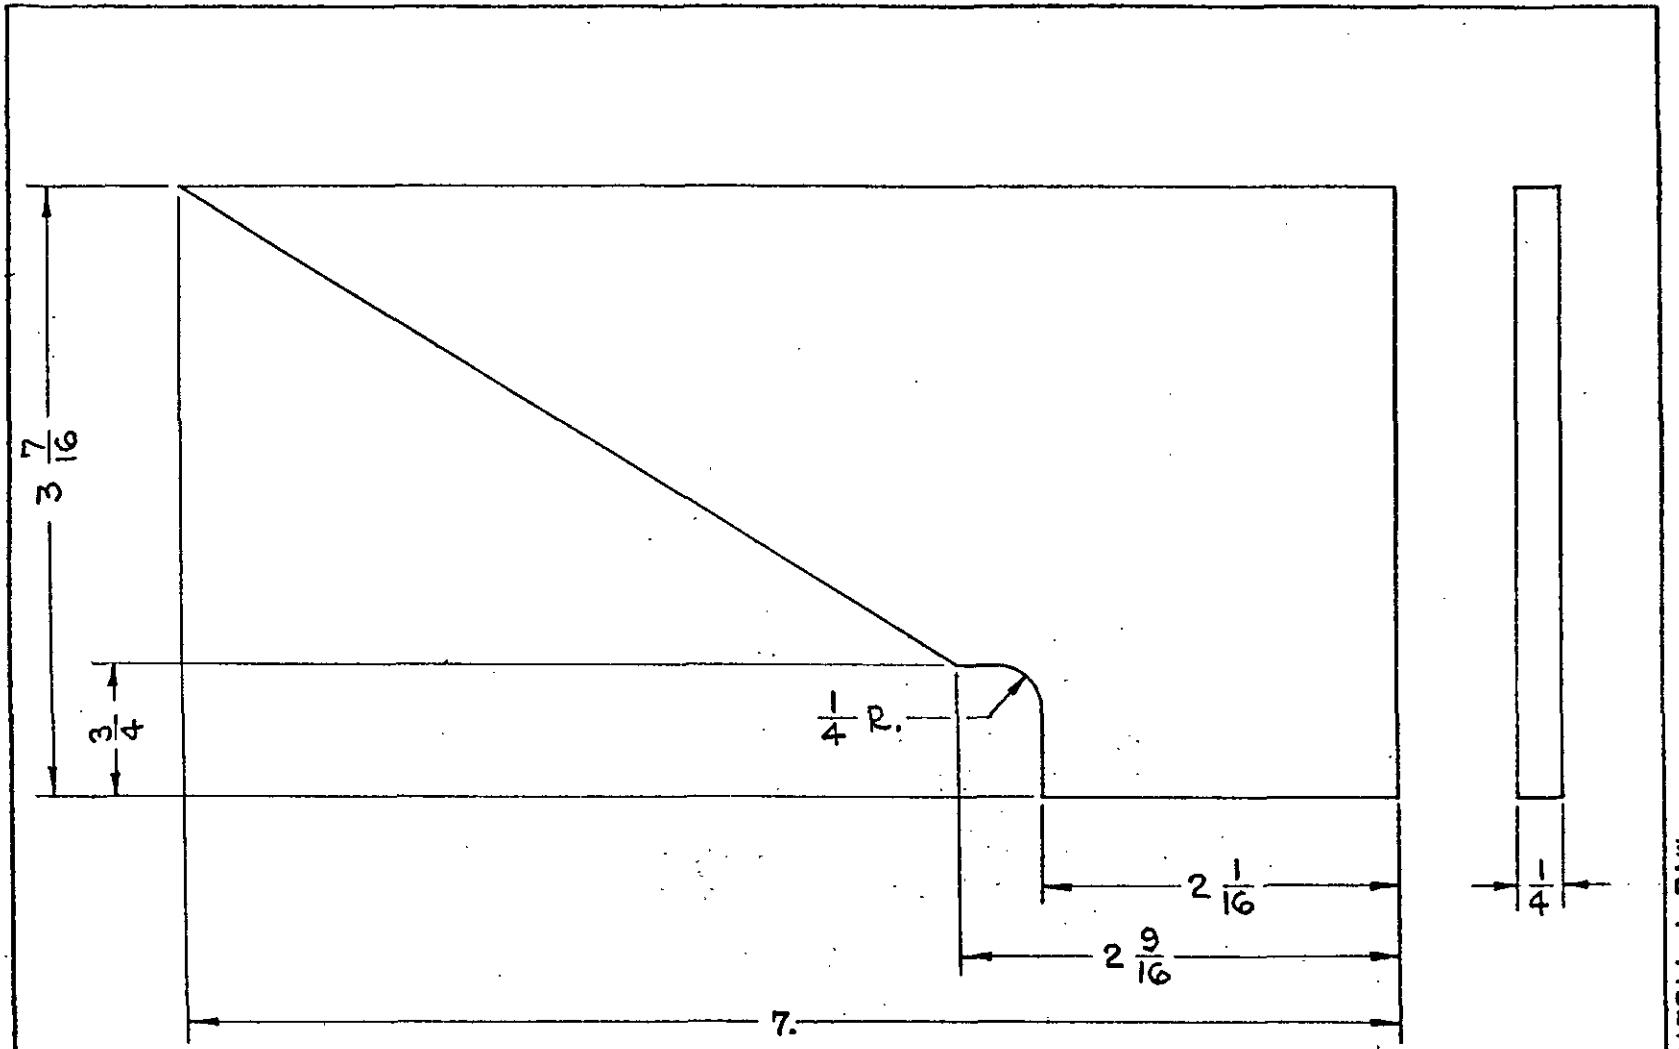

MATERIAL NOTE:
SEE NOTE I, FIG. 16

FIGURE 19
SUPPORT, UPPER HALF

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST- BRACKET ASSEMBLY, SIDE

ITEM NO	FIG. NO.	PART NAME	REQ'D.
1	22	BRACKET	1
2	23	SUPPORT	1

SPECIFICATIONS:

MATERIAL NOTE:

1 STEEL- CARBON FS1010 THRU FS1025
SPEC. QQ-S-634

WELDING NOTE-STEEL


1 WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599


PROTECTIVE FINISH NOTE:


1 PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 20

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

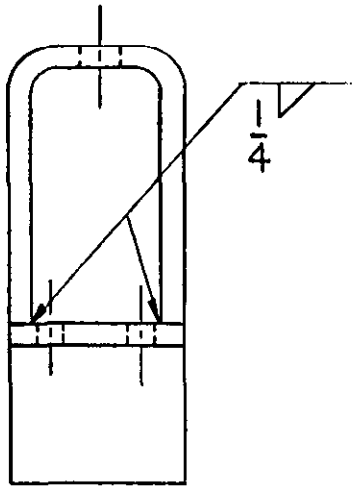

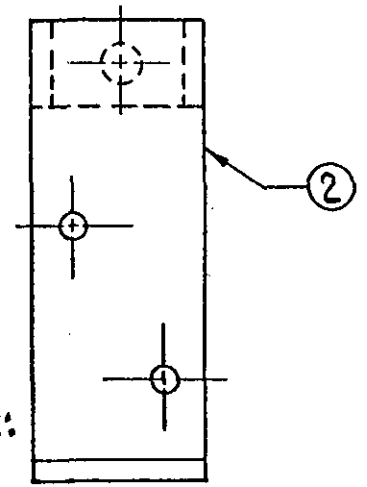

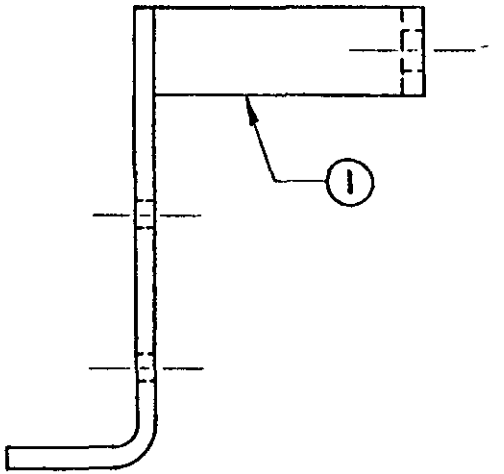


PROTECTIVE FINISH NOTE:
SEE NOTE 1 FIG. 20

WELDING NOTE:
SEE NOTE 1 FIG. 20

FIGURE 21
BRACKET ASSEMBLY, SIDE


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

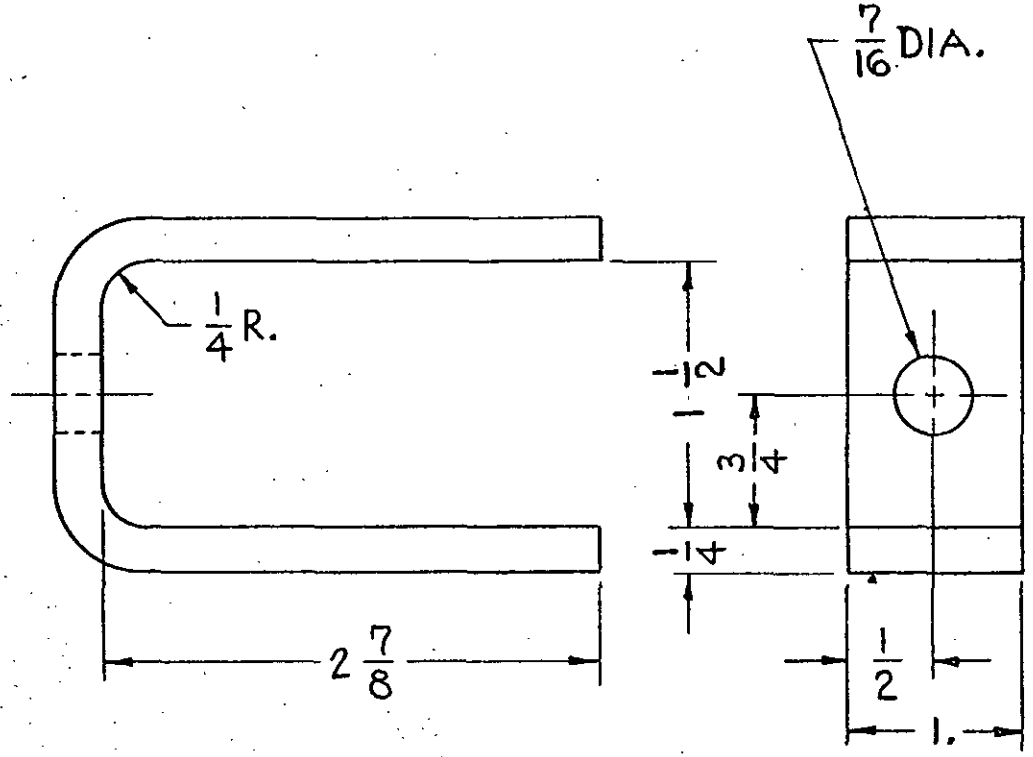

MATERIAL NOTE:
SEE NOTE I FIG. 20

FIGURE 22
BRACKET

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

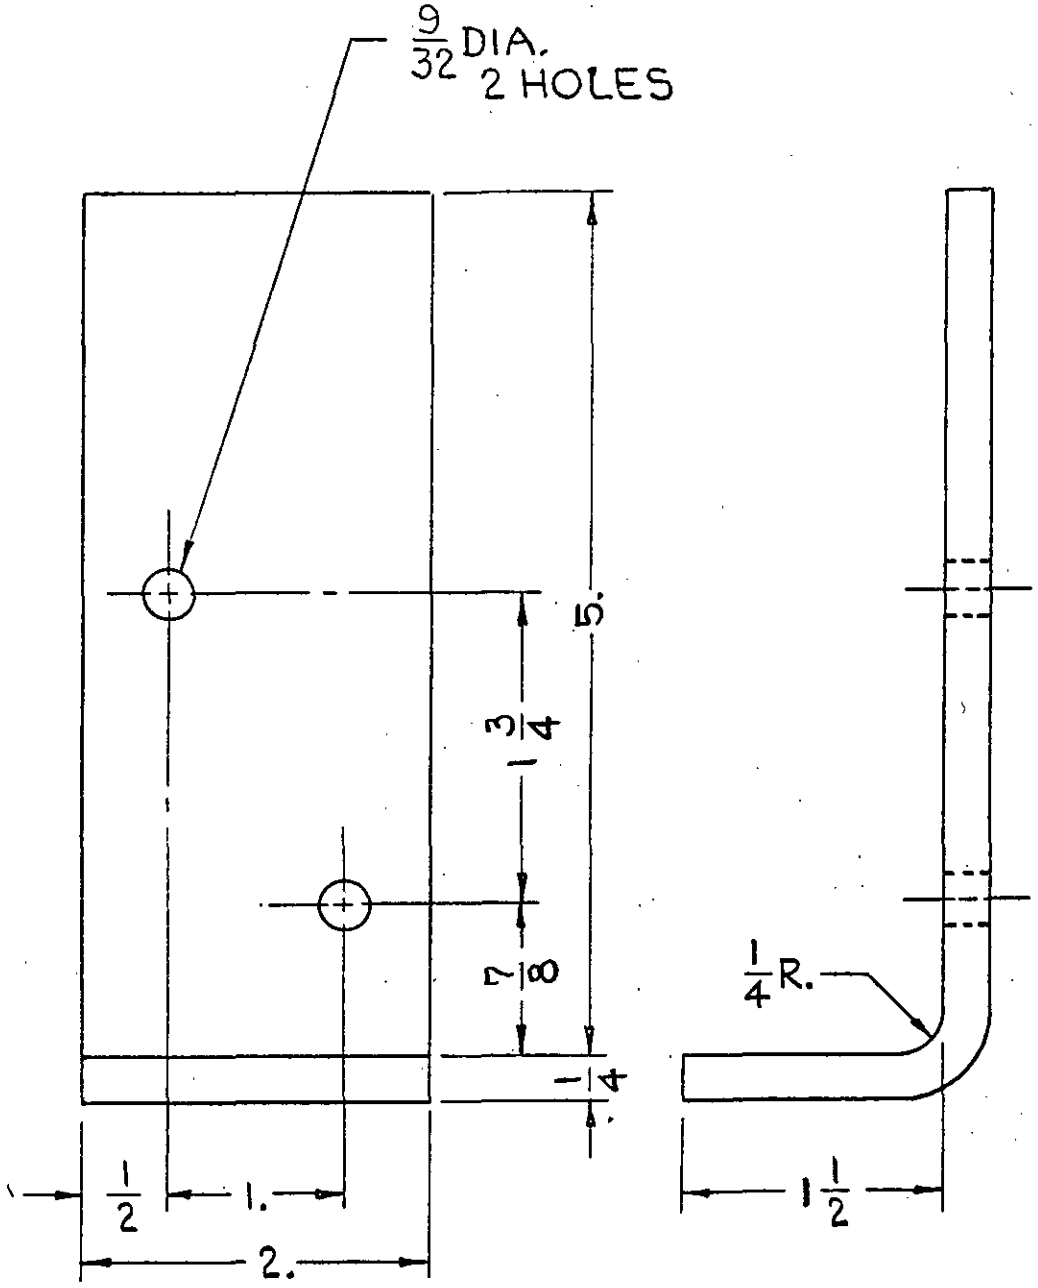

MATERIAL NOTE:
SEE NOTE I FIG. 20

FIGURE 23
SUPPORT

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST - SUPPORT ASSEMBLY, REAR

ITEM NO.	FIG NO.	PART NAME	REQ'D.
1	30	CLAMP	1
2	31	PLATE	1
3	32	ANGLE	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL - CARBON FS1010 THRU FS1025
SPEC. QQ-S-634

II STEEL
CLASS A
SPEC. QQ-S-634
1 1/4 x 1 1/4 x 1/4 ANGLE

WELDING NOTE - STEEL


I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 28

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

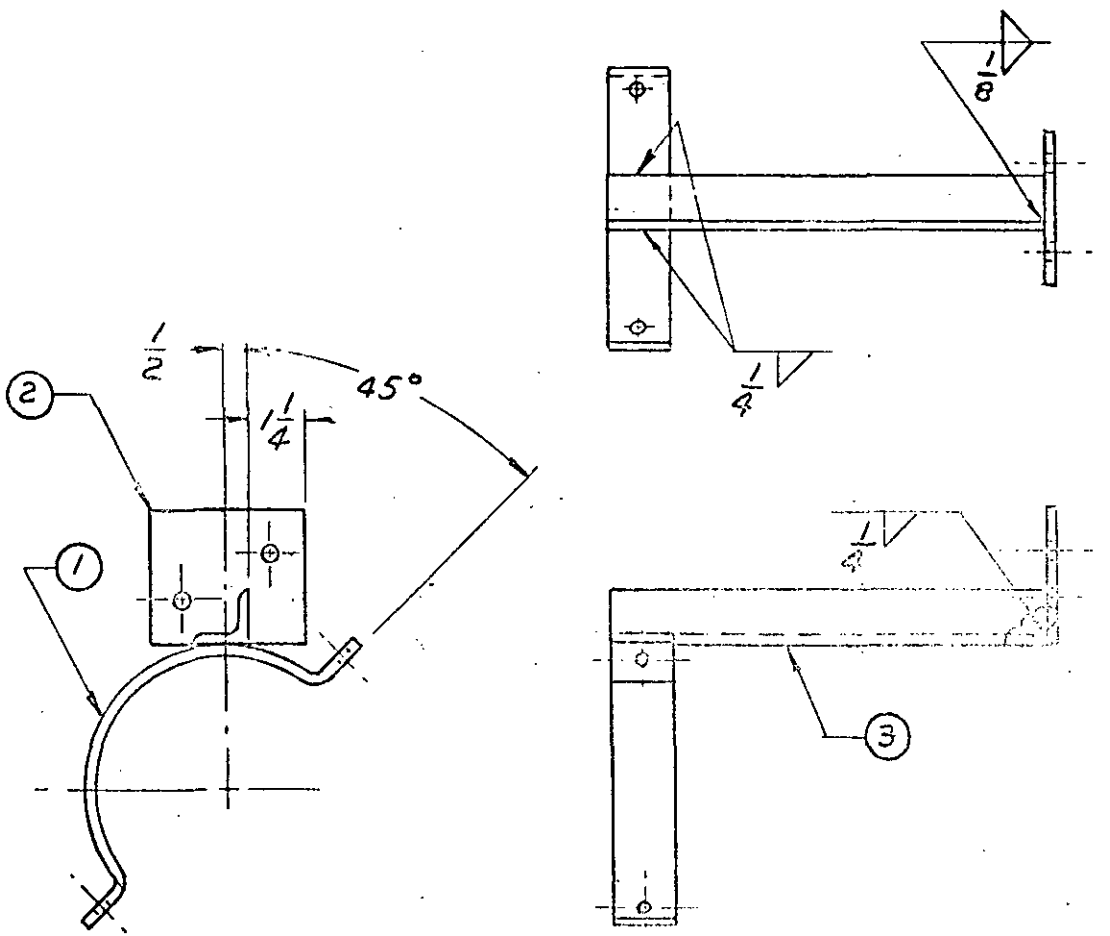


PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 28

WELDING NOTE:
SEE NOTE I, FIG. 28

FIGURE 29
SUPPORT ASSEMBLY, REAR


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

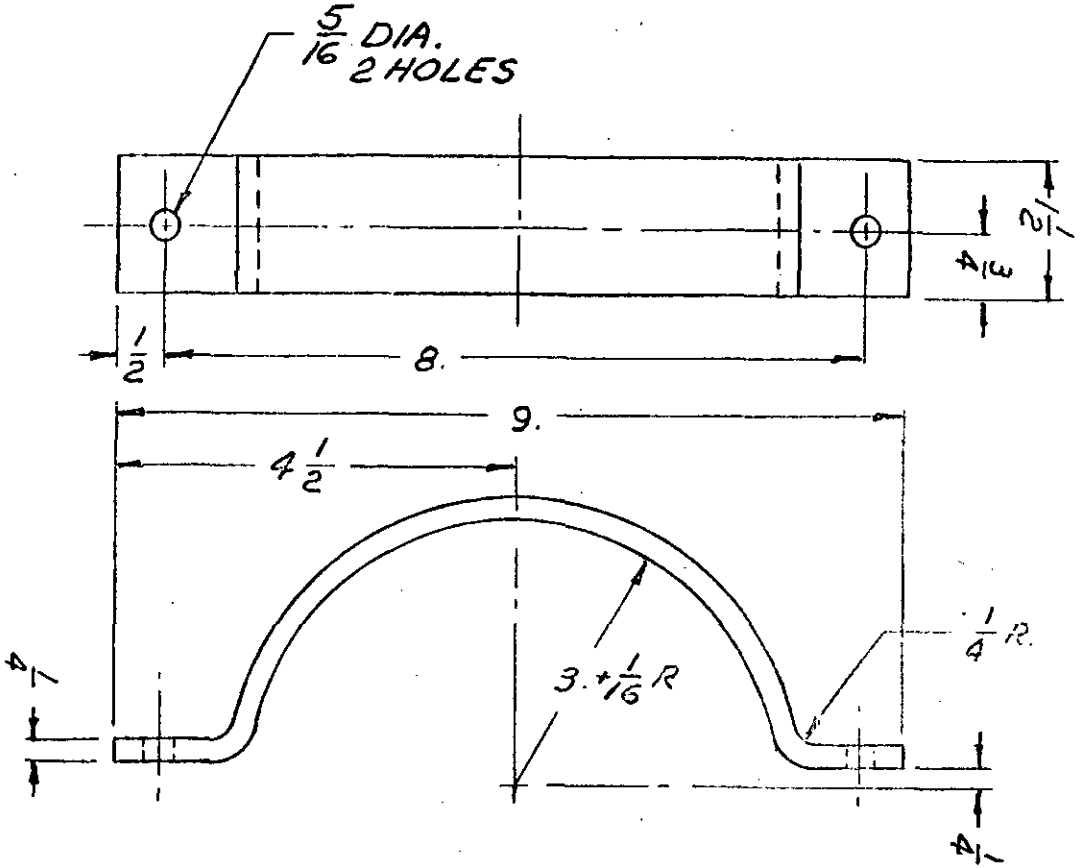

MATERIAL NOTE:
SEE NOTE 1, FIG. 28

FIGURE 30
CLAMP


Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

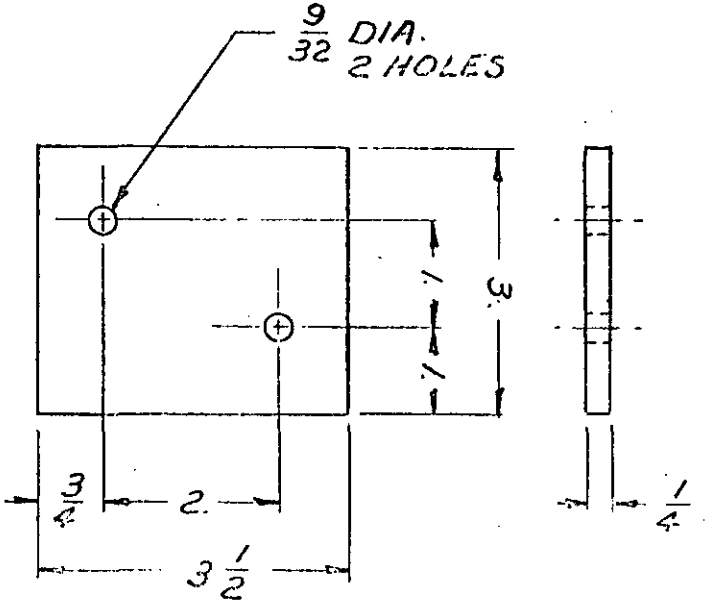

MATERIAL NOTE
SEE NOTE 1, FIG. 28

FIGURE 31
PLATE

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the currenversion before use.

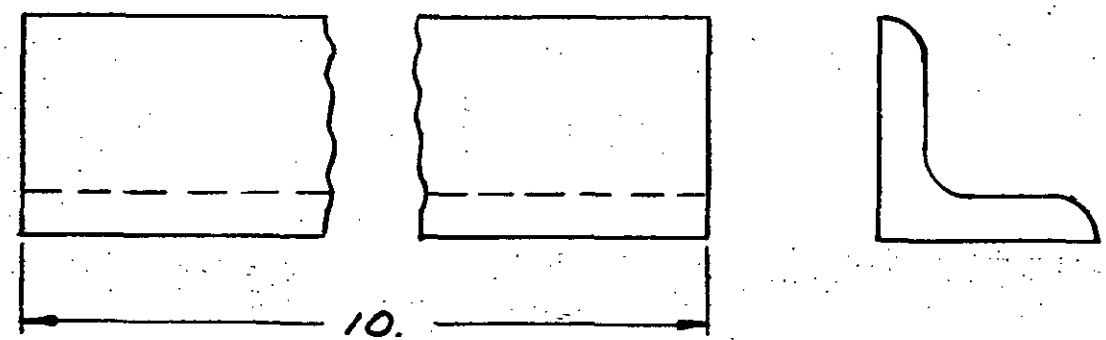

MATERIAL NOTE:
SEE NOTE II, FIG. 28

FIGURE 32
ANGLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST - SUPPORT ASSEMBLY, FRONT RIGHT & LEFT

ITEM NO.	FIG. NO.	PART NAME	REQ'D.
1	35	SUPPORT	1
2	36	STIFFENER	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL-CARBON FS 1010 THRU FS 1025
SPEC. QQ-S-634

II STEEL
CLASS A
SPEC. MIL-S-13281
3. X 3. X 1/4 ANGLE

WELDING NOTE - STEEL


I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 33

Source: https://assist.dla.mil -- Downloaded: 20260-17T18:18Z
Check the source to verify that this is the current version before use.

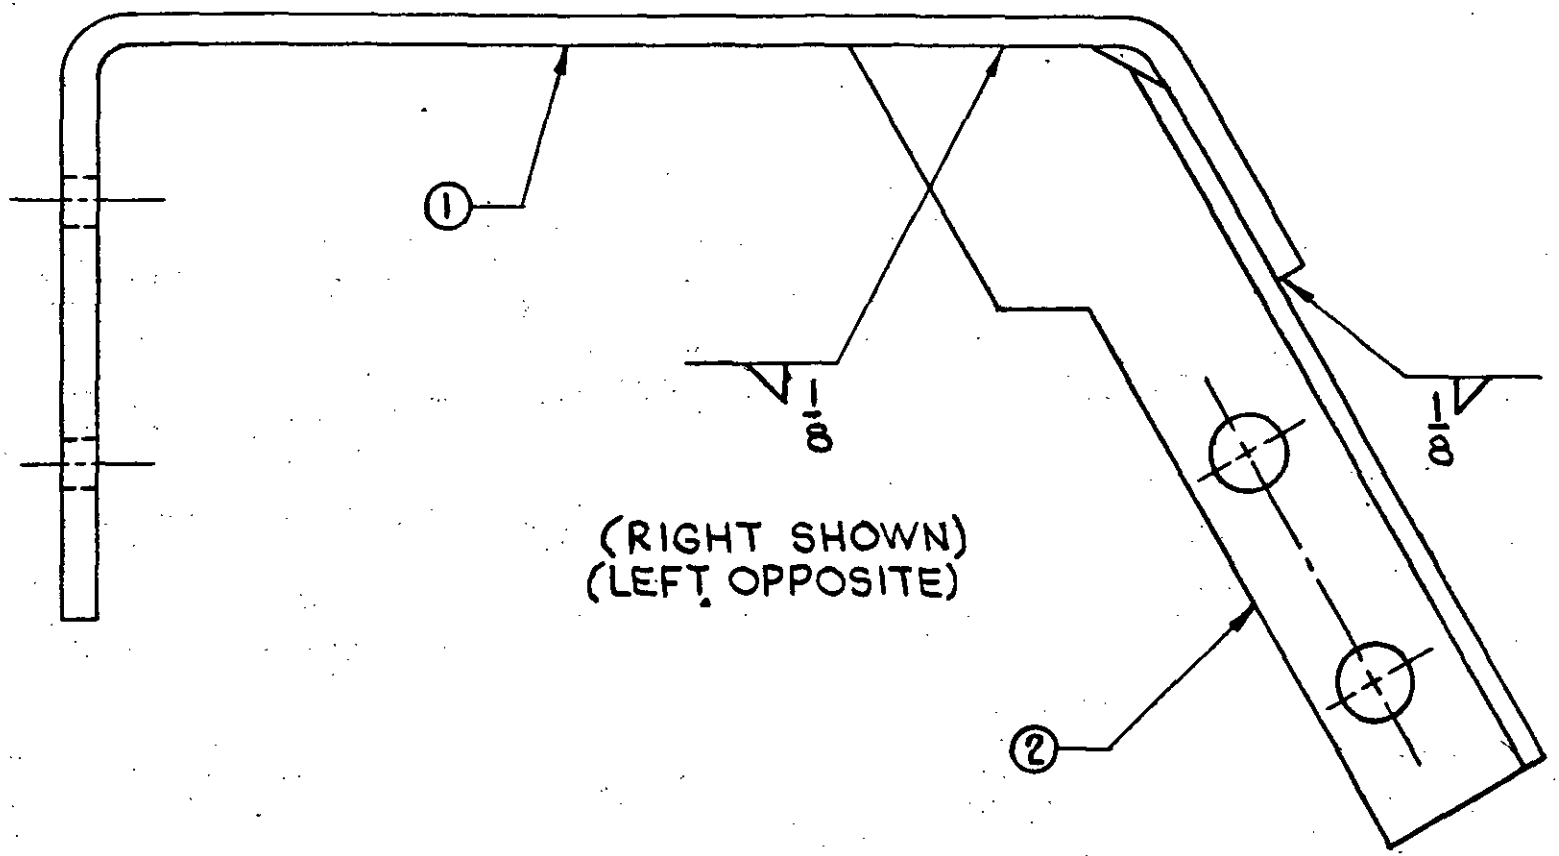


PROTECTIVE FINISH NOTE:
SEE NOTE I FIG. 33

WELDING NOTE:
SEE NOTE I FIG. 33

FIGURE 34
SUPPORT ASSEMBLY, FRONT


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

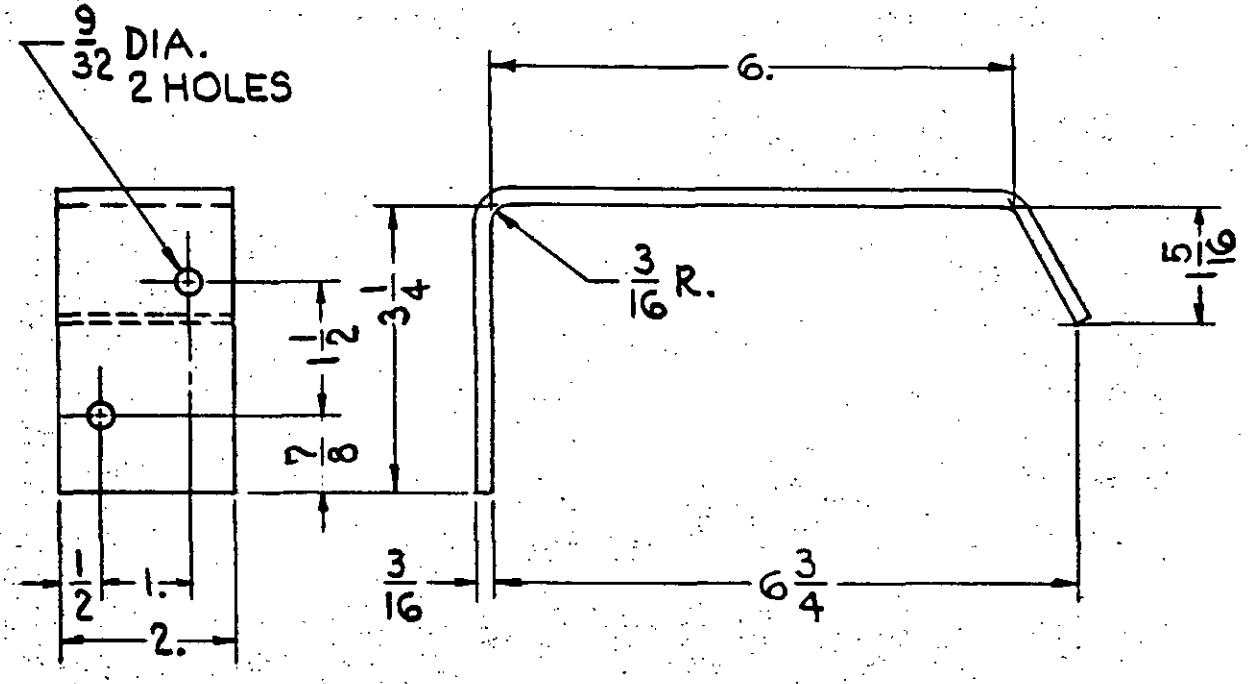

MATERIAL NOTE:
SEE NOTE I FIG. 33

FIGURE 35
SUPPORT, FRONT RIGHT & LEFT

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18:18Z
Check the source to verify that this is the current version before use.

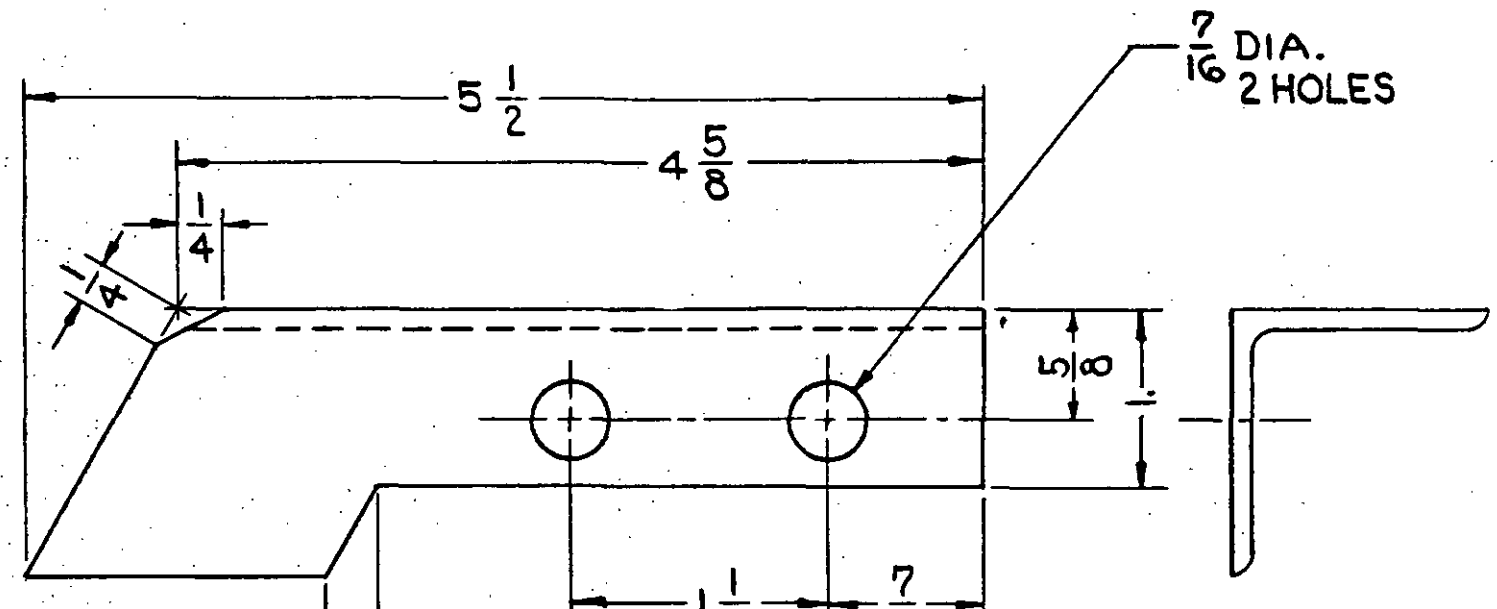

MATERIAL NOTE:
SEE NOTE I FIG. 33

FIGURE 36
STIFFENER

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST - FRAME ASSEMBLY, WATERSHED

ITEM NO.	FIG NO.	PART NAME	REQ'D.
1.	39	BEAM, SIDE	4
2	40	BEAM, INTERMEDIATE SIDE	2
3	41	BEAM, FRONT & REAR	4
4	42	CONNECTOR, BEAM	8
5	53	PLATE, CORNER	4
6	52	PLATE ASSEMBLY, CORNER	4
7	43	TUBE, SIDE	4
8	56	TUBE ASSEMBLY, SIDE	4
9	61	TUBE ASSEMBLY, SIDE	4
10	64	TUBE ASSEMBLY, SIDE	4
11	67	TUBE ASSEMBLY, SIDE	2
12	44	BOW, TOP	9
13	45	TUBE, END	6
14	46	TUBE, INTERMEDIATE	3
15	47	CONNECTOR, TUBE	6
16	48	BOW, SUPPORT	4
17	49	TUBE, SUPPORT	8
18	50	BRACE	8

STANDARD HARDWARE

ITEM NO.	REQ'D.	PART NAME	SIZE	ORDNANCE PART NO.
19	107	SCREW, PAN HD.	1/4-20UNC-2A x 2 1/2LG	MS35223-89
20	16	SCREW, PAN HD.	1/4-20UNC-2A x 2. LG.	MS35223-87
21	52	SCREW, PAN HD.	1/4-20UNC-2A x 1 1/2LG	MS35223-85
22	2	SCREW, HEX. HD. CAP	1/4-20UNC-2A x 3 1/2 LG.	MS90725-10
23	16	SCREW, HEX. HD. CAP	1/4-20UNC-2A x 5. LG.	MS90725-26
24	193	NUT, WING	1/4-20UNC-2B	MS35425-14
25	193	WASHER, LOCK	1/4 DIA.	MS35338-104

FIGURE 37A

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS:

MATERIAL NOTE:

I LUMBER DOUGLAS FIR
CLEAR SURFACE 4 SIDES
SPEC. MM-L-751
COMMERCIAL SIZE 2 x 4.

II STEEL CARBON TUBING
COMPOSITION FS1000
TYPE I CONDITION HR
SPEC. QQ-T-830
EXCEPT RECTANGULAR
2. x 4. x 3/16 WALL THICKNESS

III STEEL CARBON TUBING
COMPOSITION FS1000
TYPE I, III, IV CONDITION HR, W, CDSR
SPEC. QQ-T-830
1. O.D. x .065 WALL THICKNESS

IV STEEL CARBON TUBING
COMPOSITION FS1000
TYPE I, III, IV CONDITION HR, W, CDSR
SPEC. QQ-T-830
1 1/8 O.D. x .049 WALL THICKNESS

PROTECTIVE FINISH NOTE:

I ENAMEL SEMI-GLOSS COLOR O.D.
TYPE OPTIONAL
SPEC. TT-E-485 OR TT-E-529

OPTIONAL PROTECTIVE FINISH
CREOSOTE SPEC. TT-W-568
SOAK 4 TO 6 MINUTES AT
TEMPERATURE BETWEEN 70°F & 80°F

PAINT ALL OVER - 2 COATS

FIGURE 378.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

PROTECTIVE FINISH NOTE:

II BASE PHOSPHATE
IN ACCORDANCE WITH TYPE I
SPEC. TT-C-490
PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

NOTE:

I DISTANCE MARKED ⊗
TO BE FREE OF PAINT

II UNPAINTED TUBE ENDS TO
BE COATED WITH MIL-C-16173
CORROSION PREVENTIVE
OR TT-C-490, TYPE I
PHOSPHATE PROTECTIVE COATING

FIGURE 37C

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

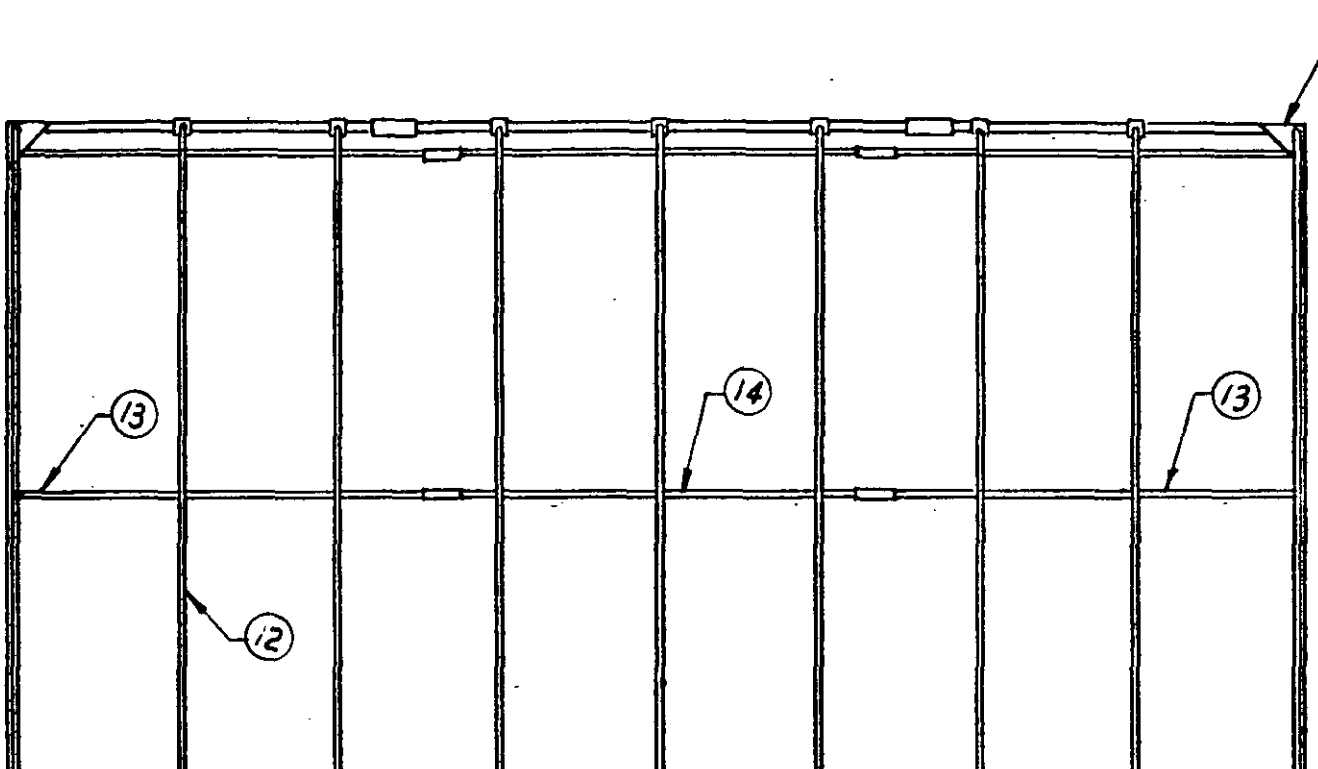


FIGURE 38A
FRAME ASSEMBLY
PLAN VIEW

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

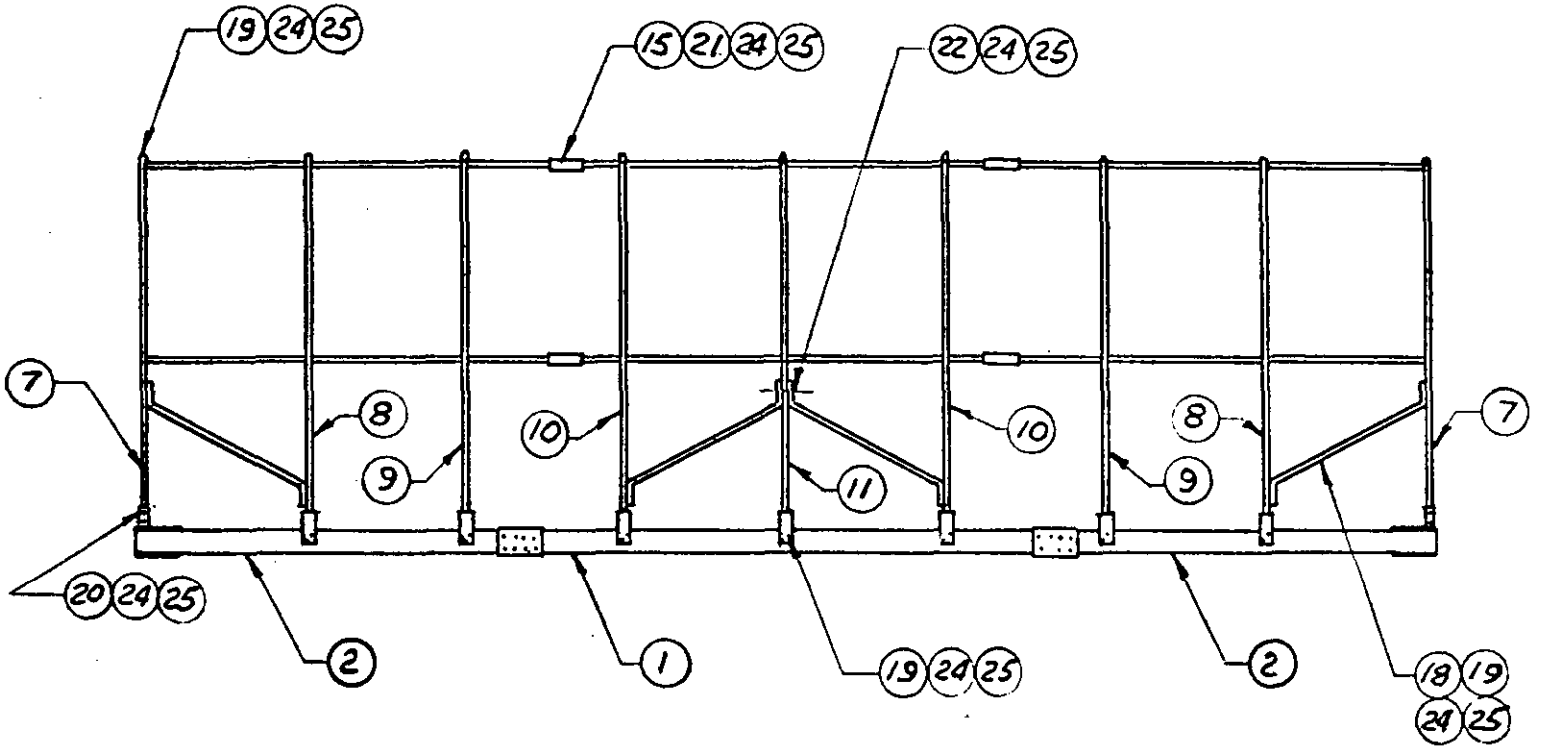


FIGURE 38B
FRAME ASSEMBLY
LEFT & RIGHT ELEVATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.


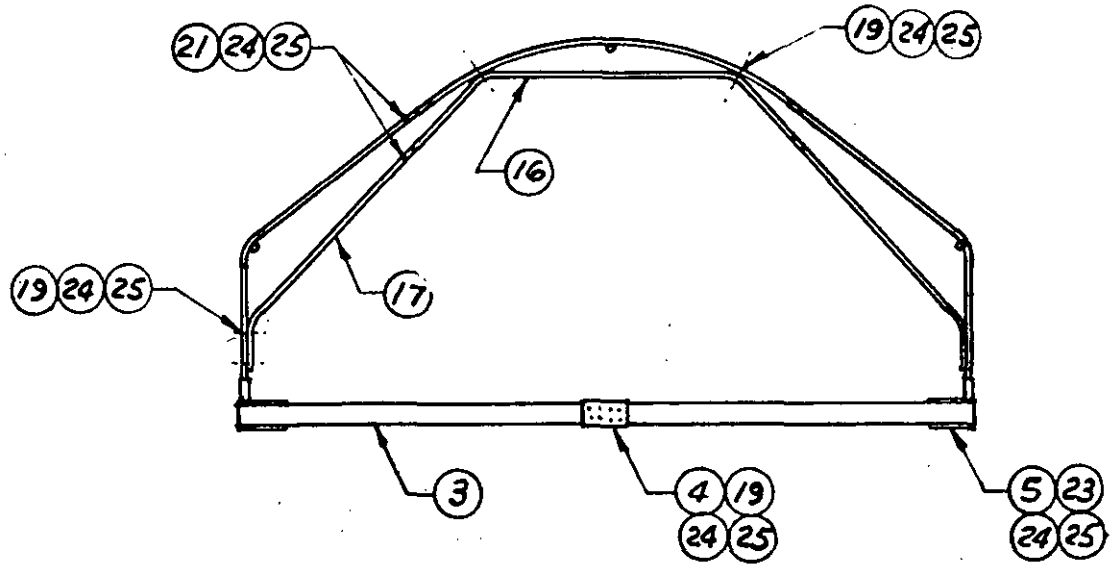


FIGURE 38C
FRAME ASSEMBLY
FRONT & REAR ELEVATION

Source: https://assist.dla.mil - Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

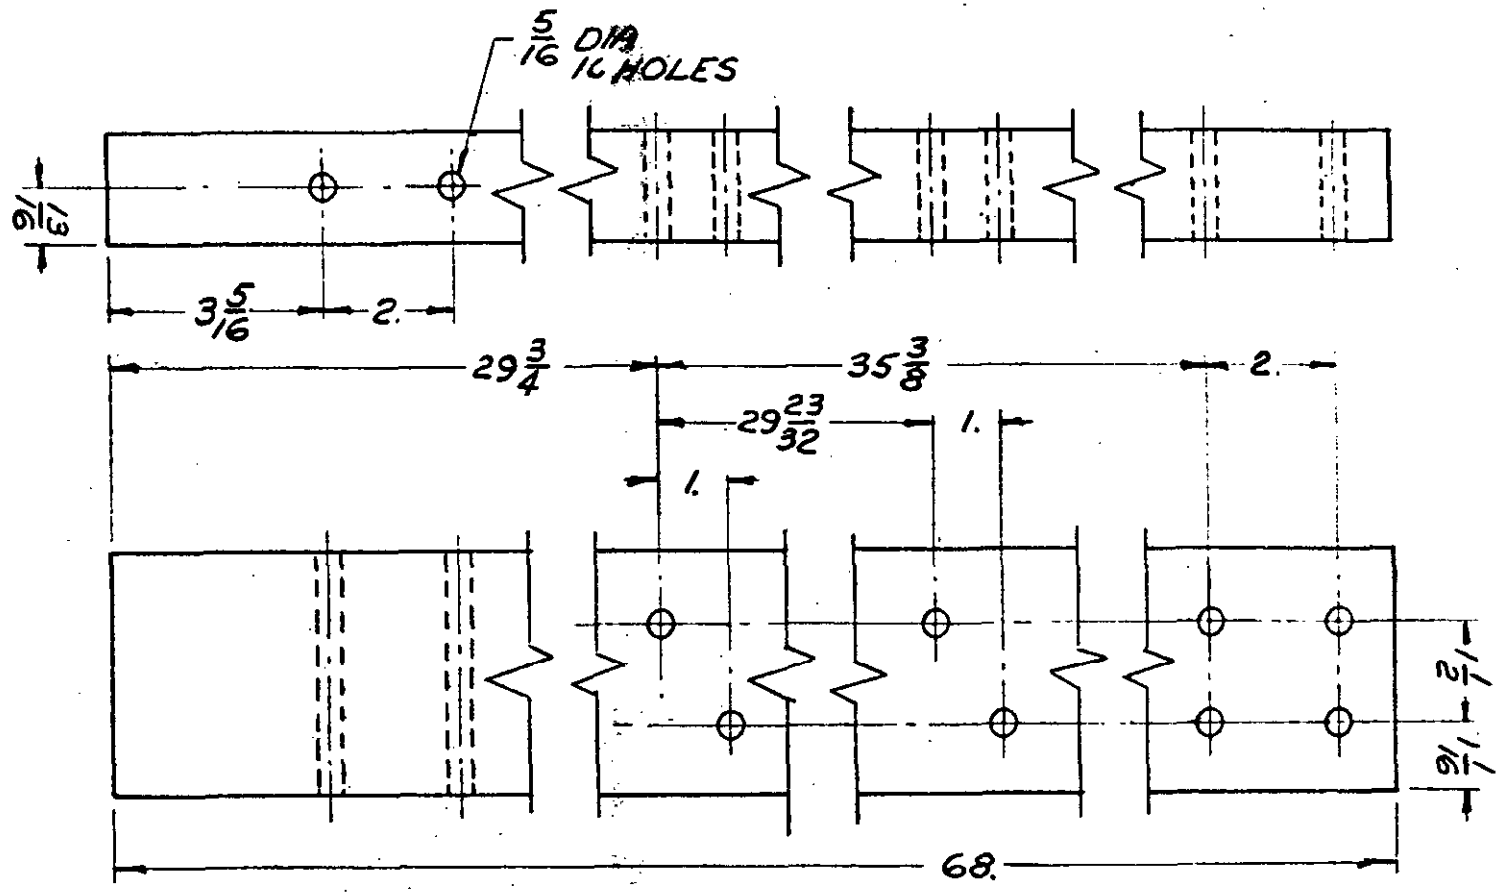


PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 37

MATERIAL NOTE:
SEE NOTE I, FIG. 3

FIGURE 39
BEAM, SIDE

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

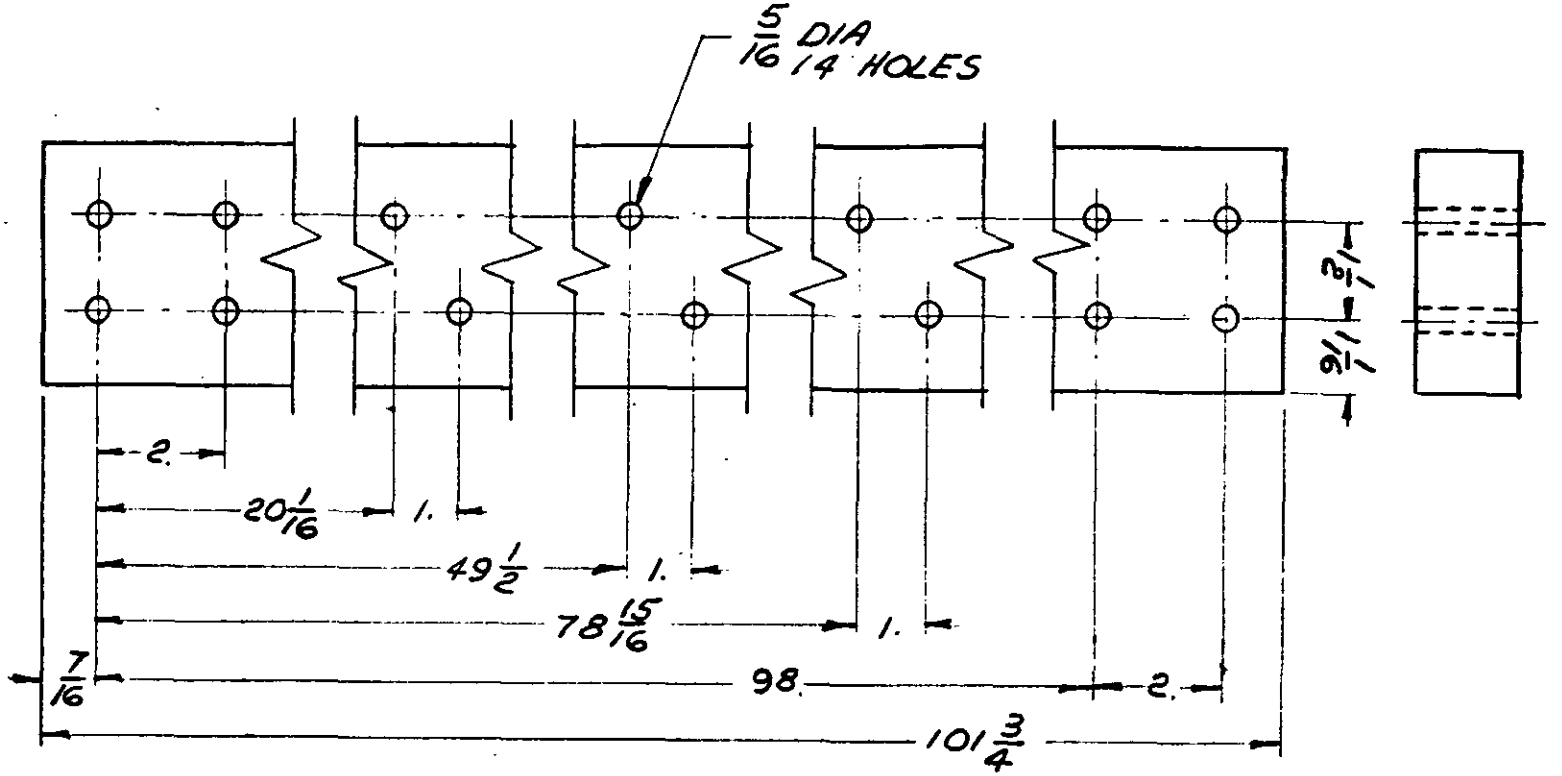


PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 37

MATERIAL NOTE:
SEE NOTE I, FIG. 37

FIGURE 40
BEAM, INTERMEDIATE SIDE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

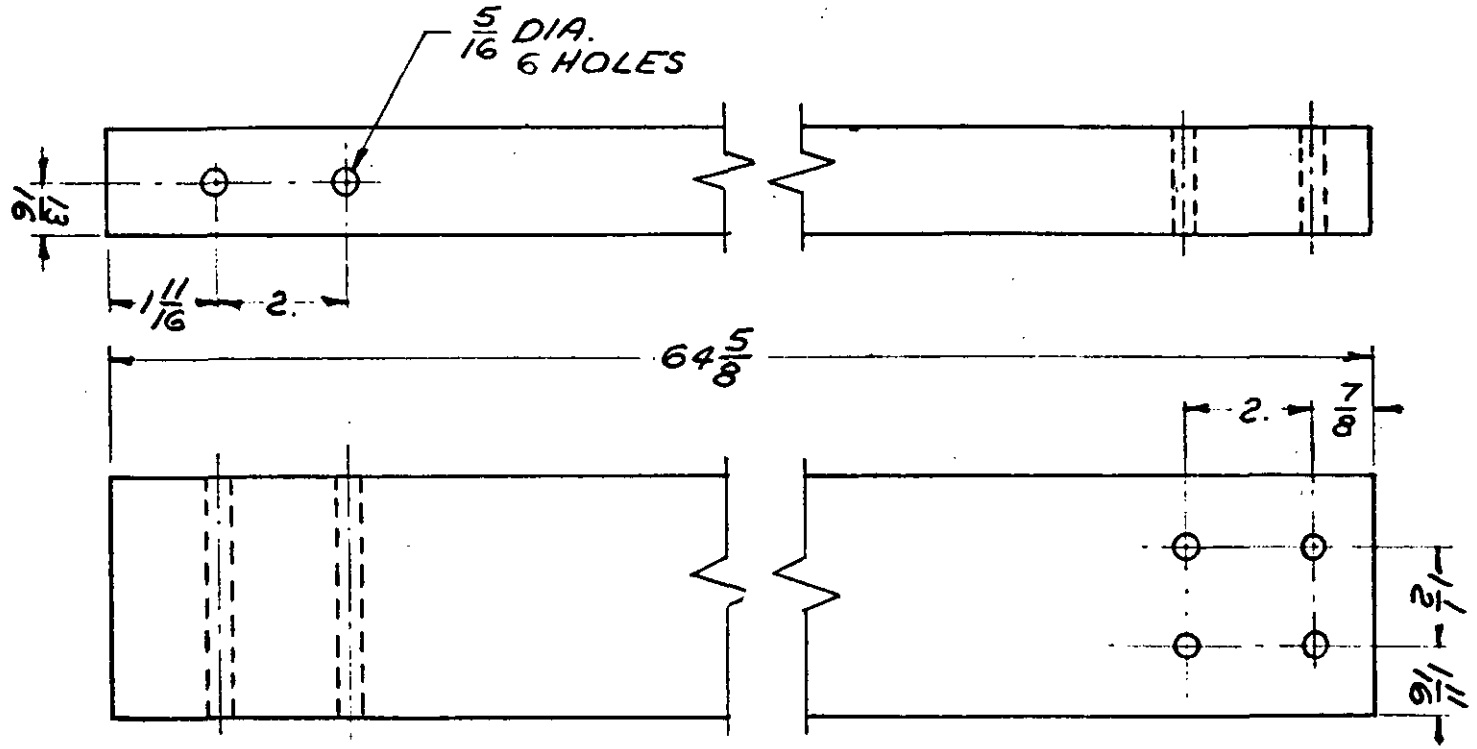


PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 37

MATERIAL NOTE:
SEE NOTE I, FIG. 37

FIGURE 41
BEAM, FRONT & REAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

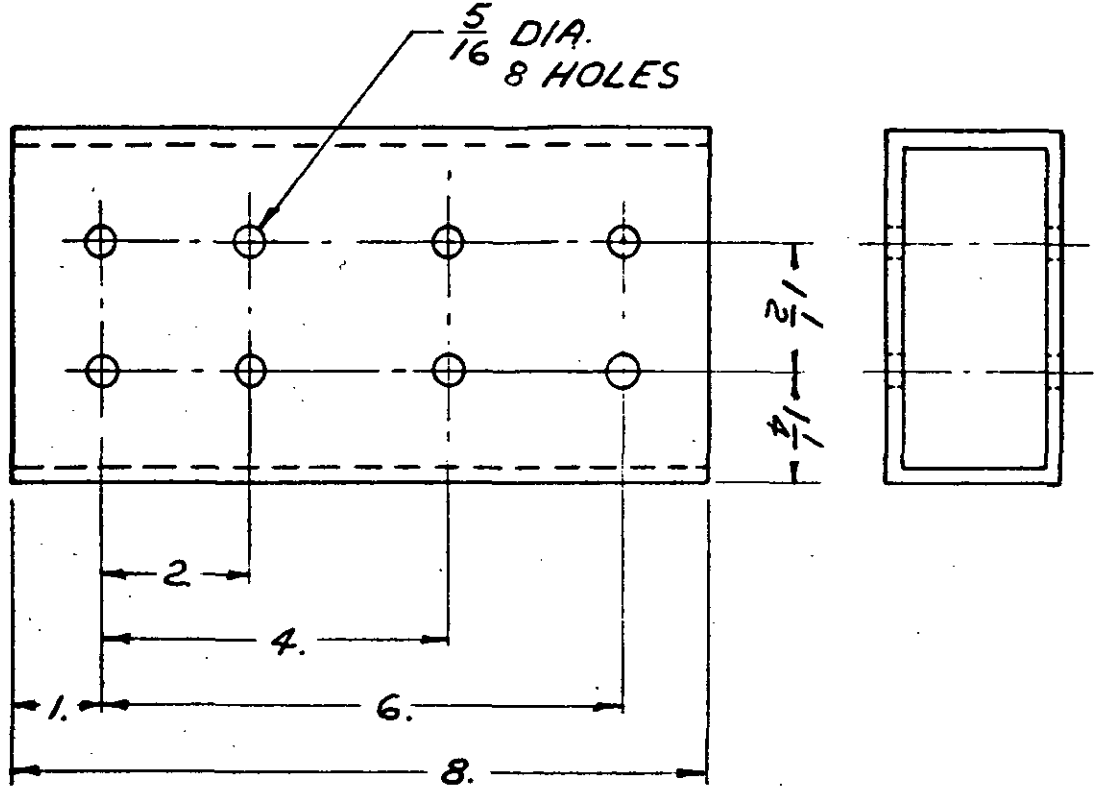


PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE II, FIG 37

FIGURE 42
CONNECTOR, BEAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

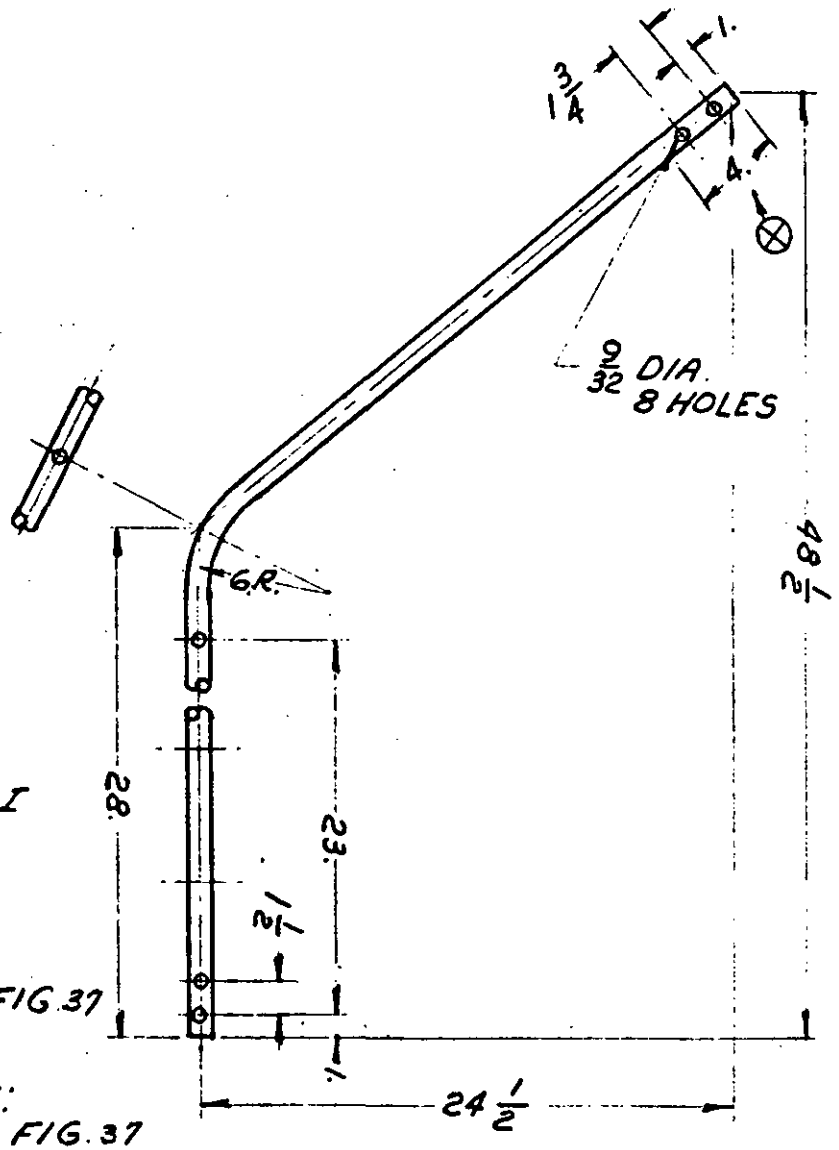


NOTE:
⊗ SEE NOTE'S I & II, FIG. 37

PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE III, FIG. 37

FIGURE 43
TUBE, SIDE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

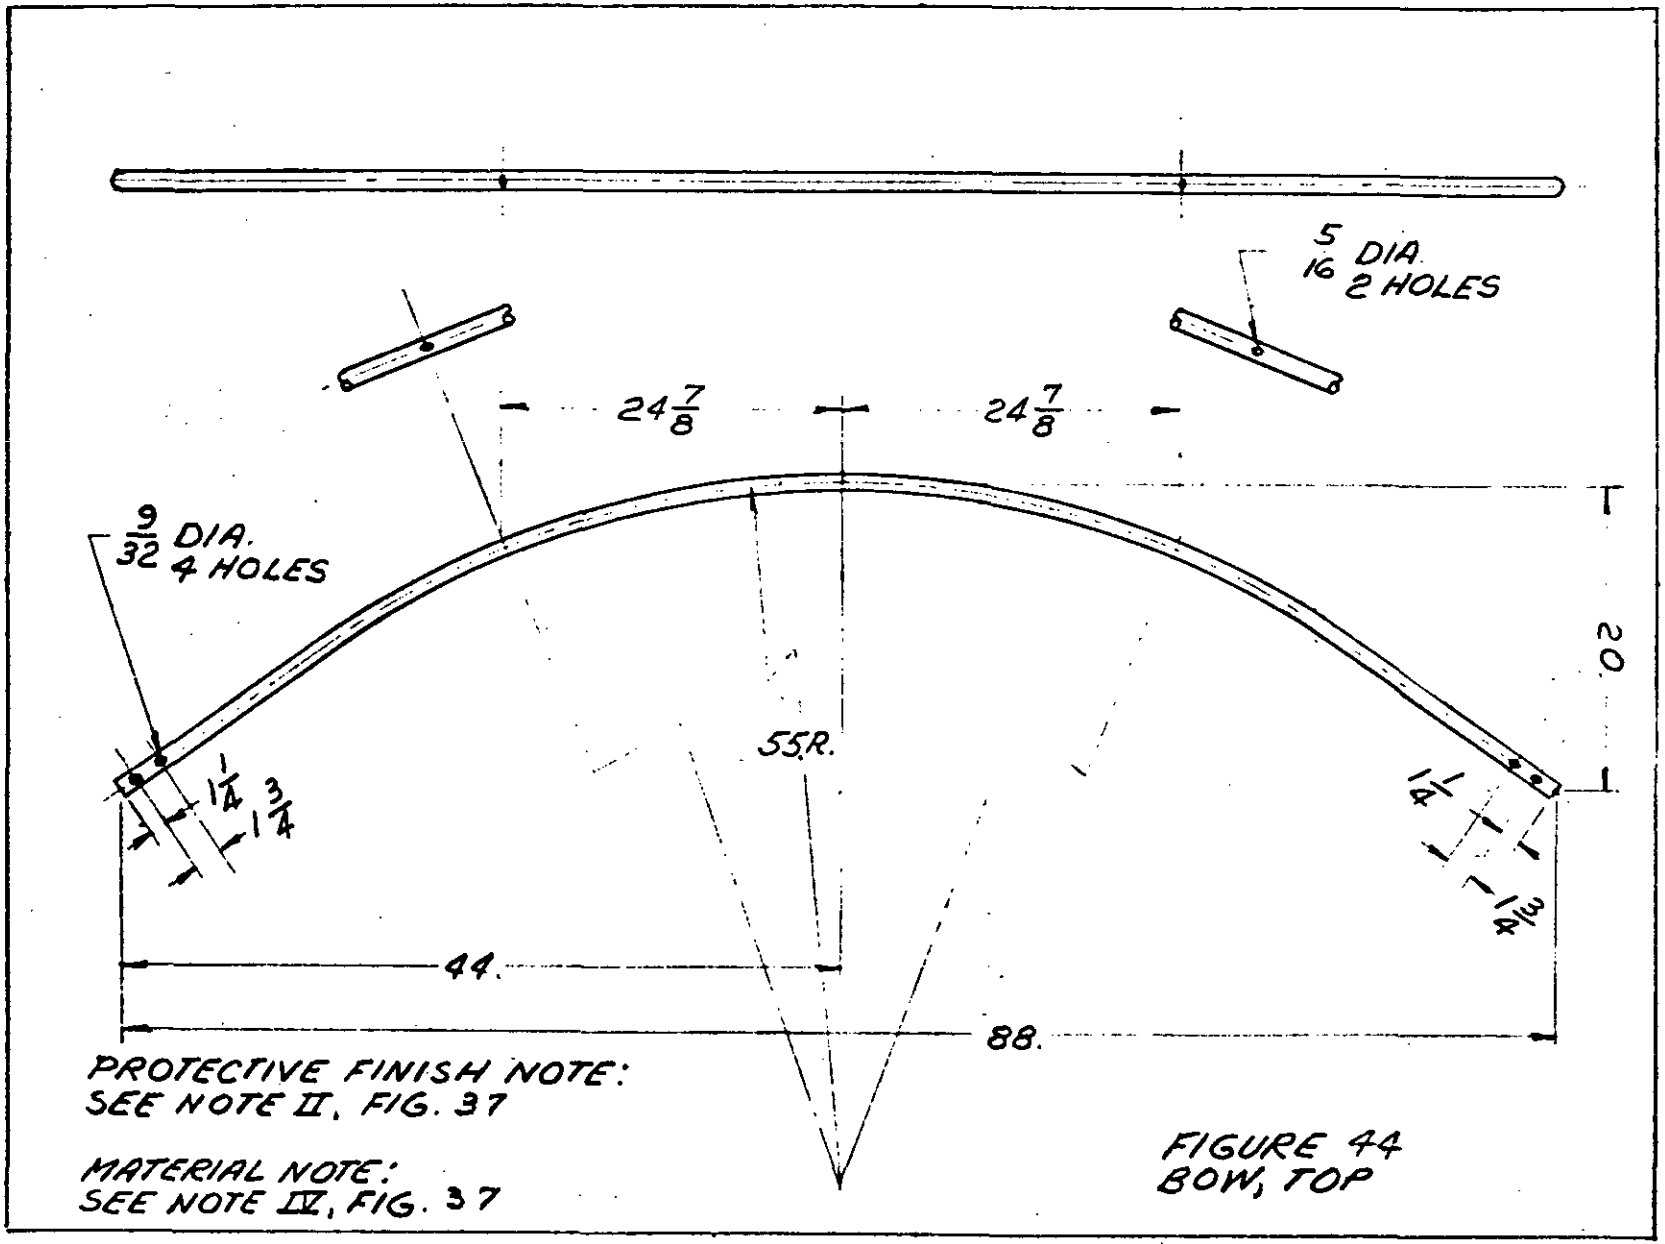


PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE IV, FIG. 37

FIGURE 44
BOW, TOP

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

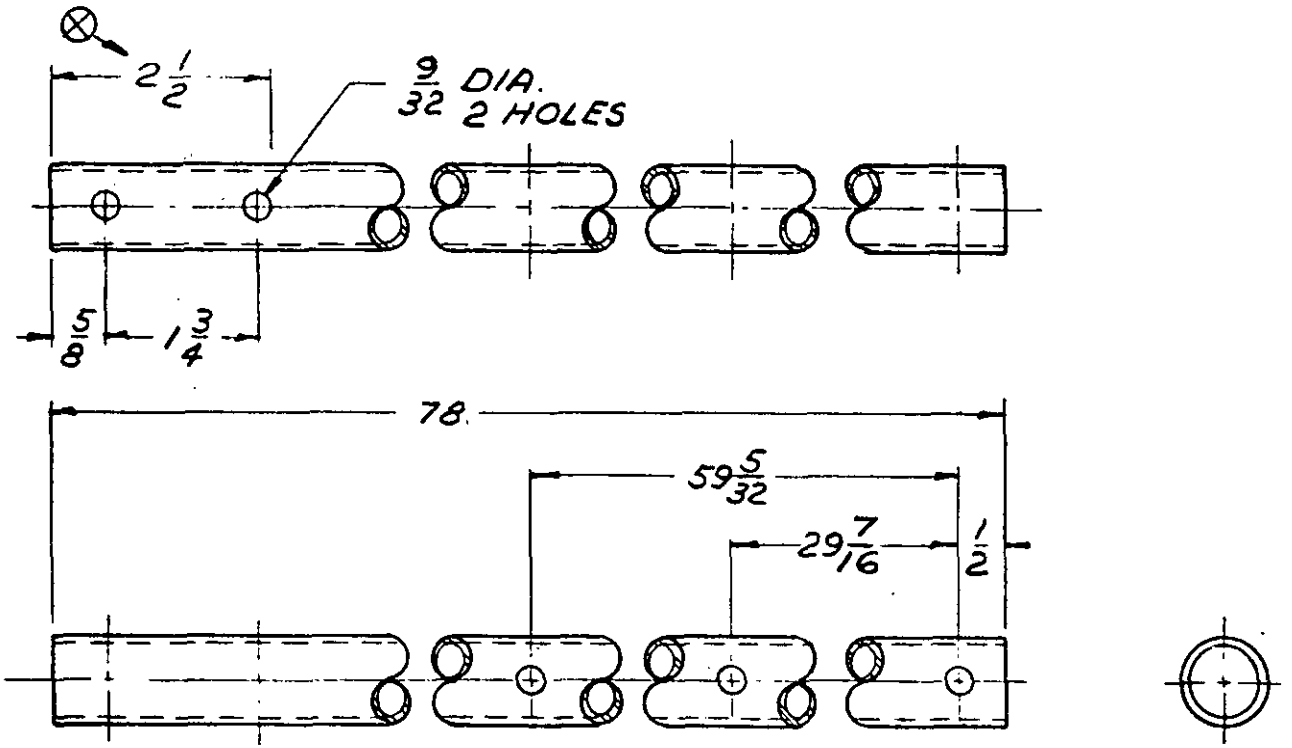


NOTE:
⊗ SEE NOTES I & II
FIG. 37

PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE III, FIG 37

FIGURE 45
TUBE, END

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

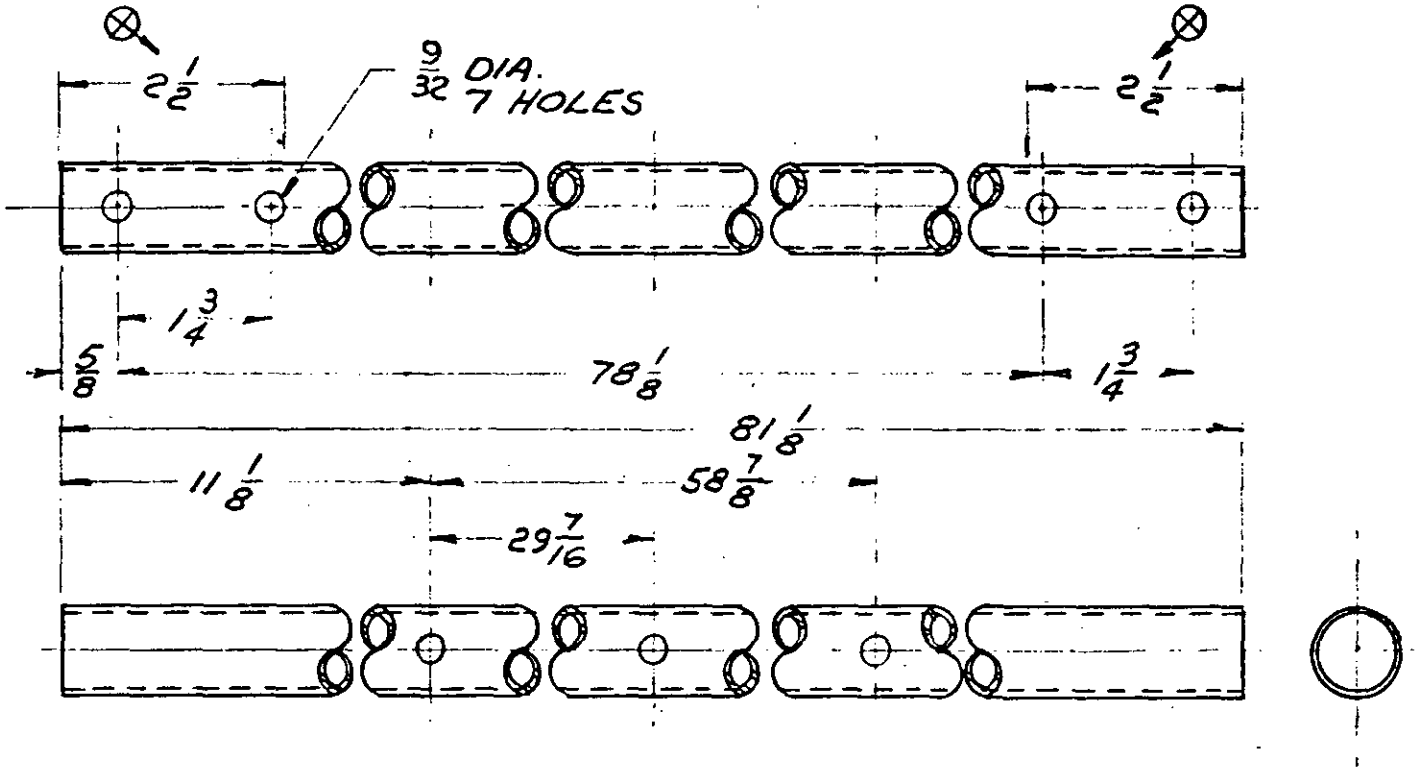


NOTE:
⊗ SEE NOTES I & II FIG. 37

PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE III, FIG. 37

FIGURE 46
TUBE, INTERMEDIATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

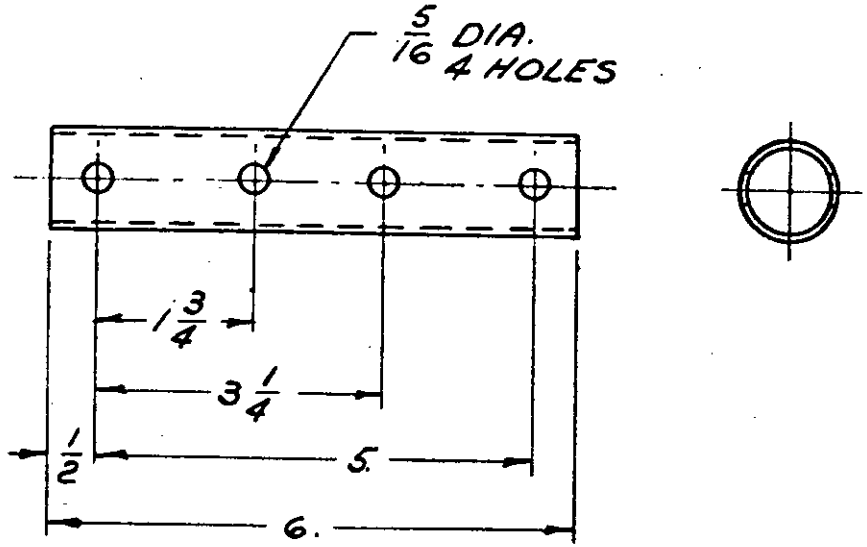


PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE IV, FIG. 37

FIGURE 47
CONNECTOR, TUBE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17 18:18:18Z
Check the source to verify that this is the current version before use.

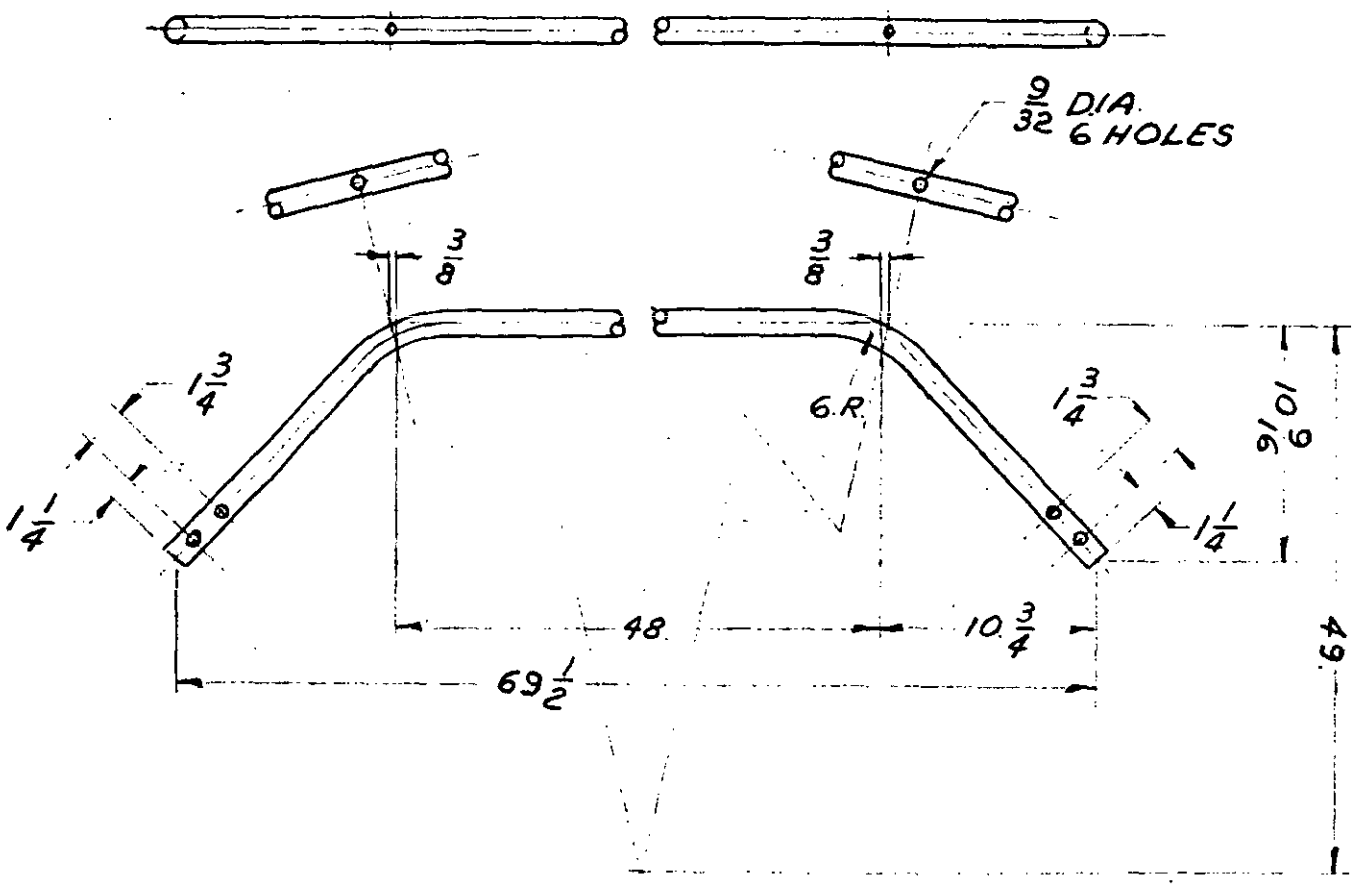


PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE IV, FIG. 37

FIGURE 98
BOW, SUPPORT

Source: https://assist.dla.mil -- Downloaded: 202640-17T18:18Z
Check the source to verify that this is the current version before use.

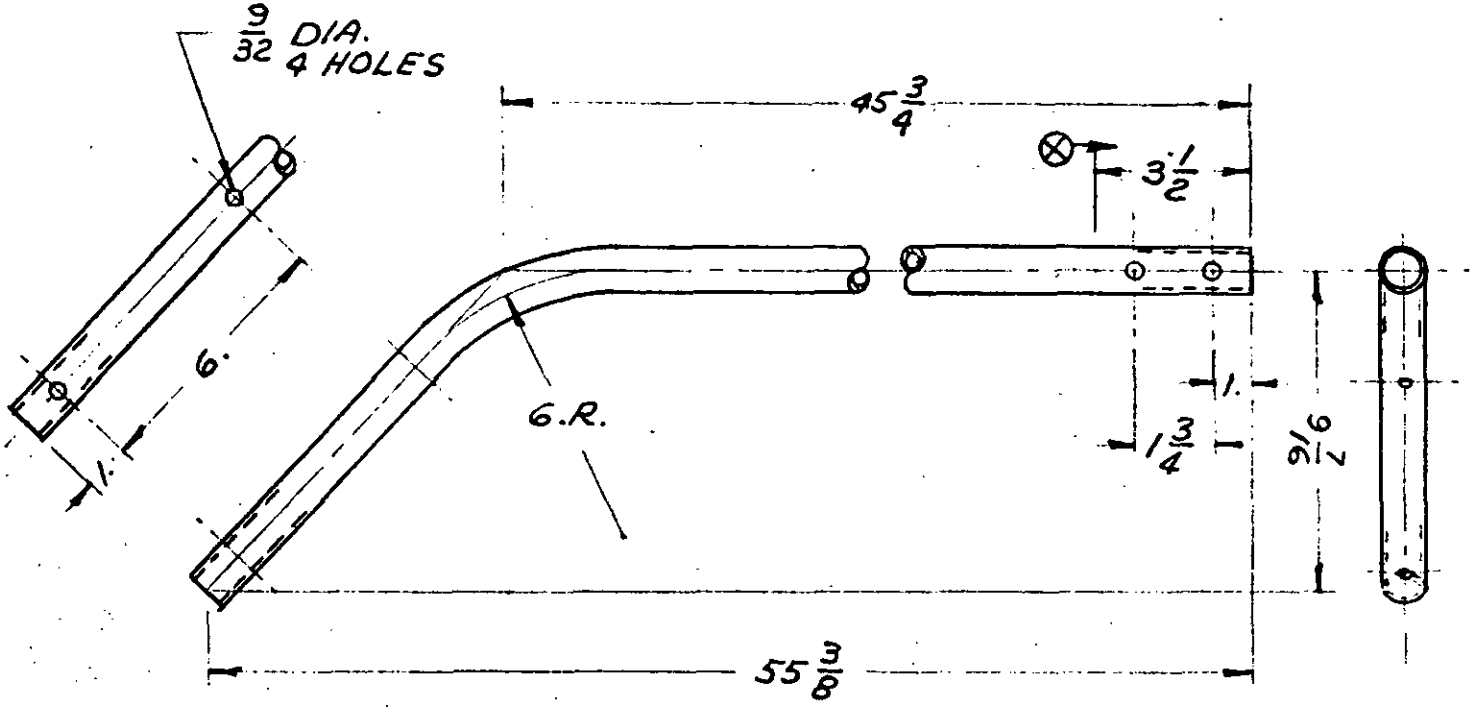


NOTE:
⊗ SEE NOTES I & II FIG. 37

PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE III, FIG. 37

FIGURE 49
TUBE, SUPPORT

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

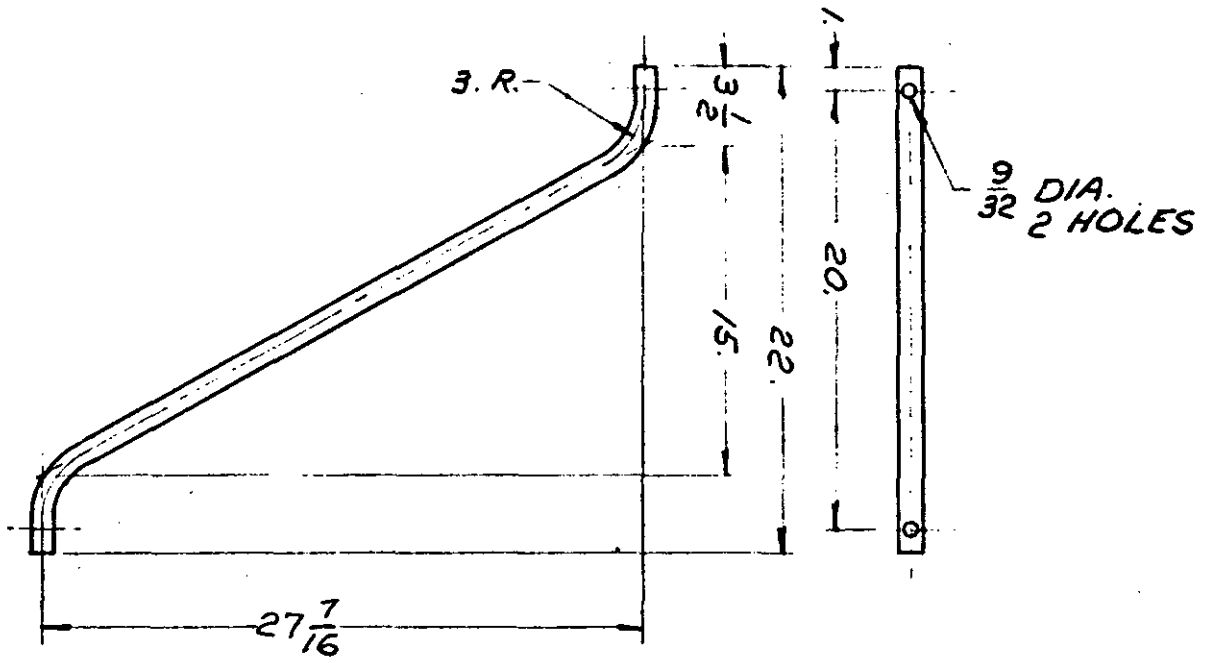

PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE III, FIG. 37

FIGURE 50
BRACE

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST - CORNER PLATE ASSEMBLY

ITEM NO.	FIG. NO.	PART NAME	REQ'D.
1	53	PLATE, CORNER	1
2	54	TUBE, CONNECTOR	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL-CARBON FS1010 THRU FS1025
SPEC. QQ-S-634

II STEEL CARBON TUBING
COMPOSITION FS1000
TYPE I, III, OR IV CONDITION HR, W, CD
SPEC. QQ-T-825
1 1/4 O.D. x .109 WALL THICKNESS

WELDING NOTE - STEEL:


I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 51

Source: https://assist.dla.mil -- Downloaded: 202640-17T18:18Z
Check the source to verify that this is the current version before use.

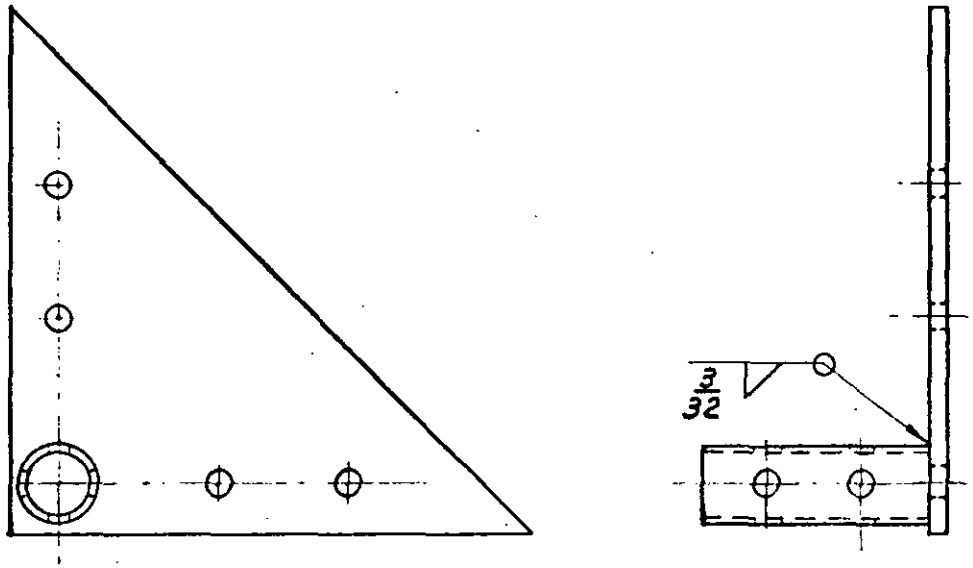


PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 51

WELDING NOTE:
SEE NOTE I, FIG 51

FIGURE 52
CORNER PLATE ASSEMBLY


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

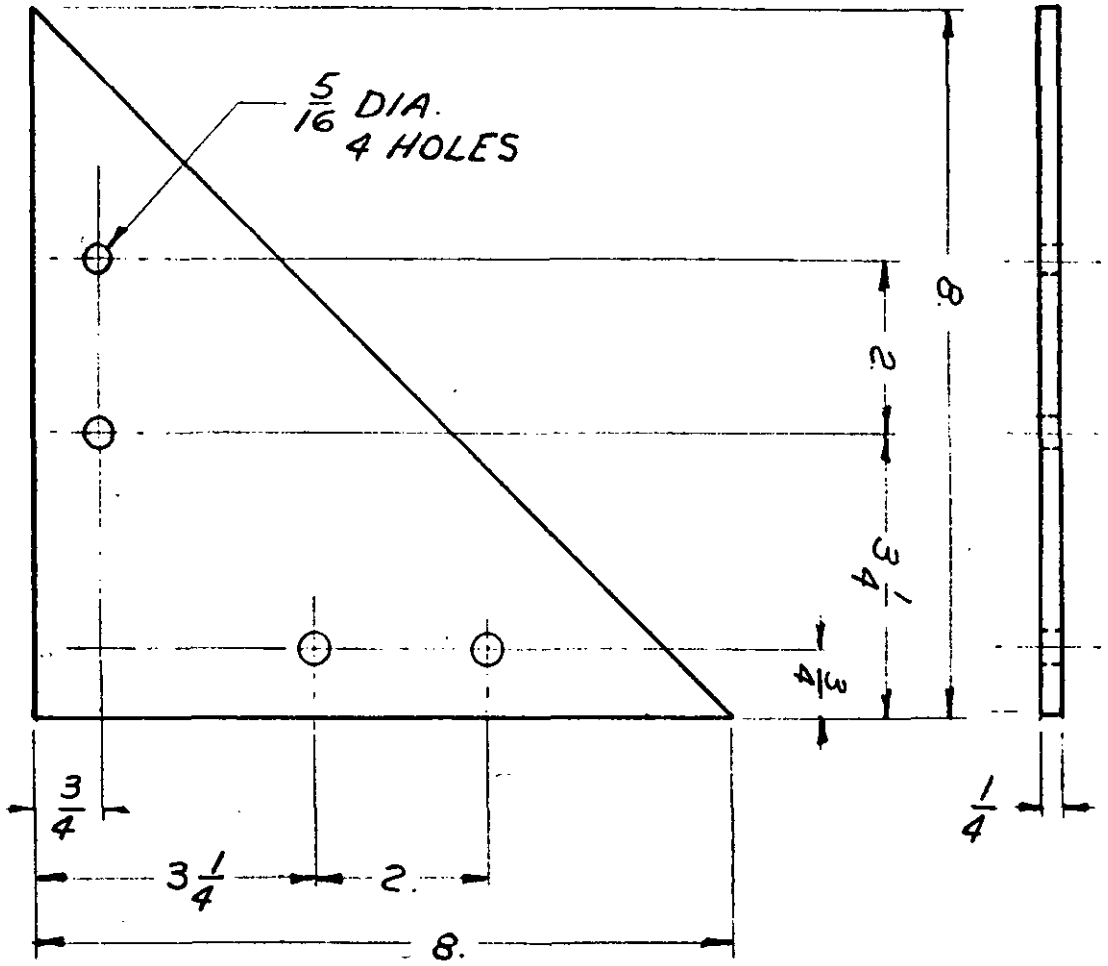

MATERIAL NOTE:
SEE NOTE I, FIG. 51

FIGURE 53
PLATE, CORNER

Source: https://assist.dla.mil -- Downloaded: 2026-04-17T18:18Z
Check the source to verify that this is the current version before use.

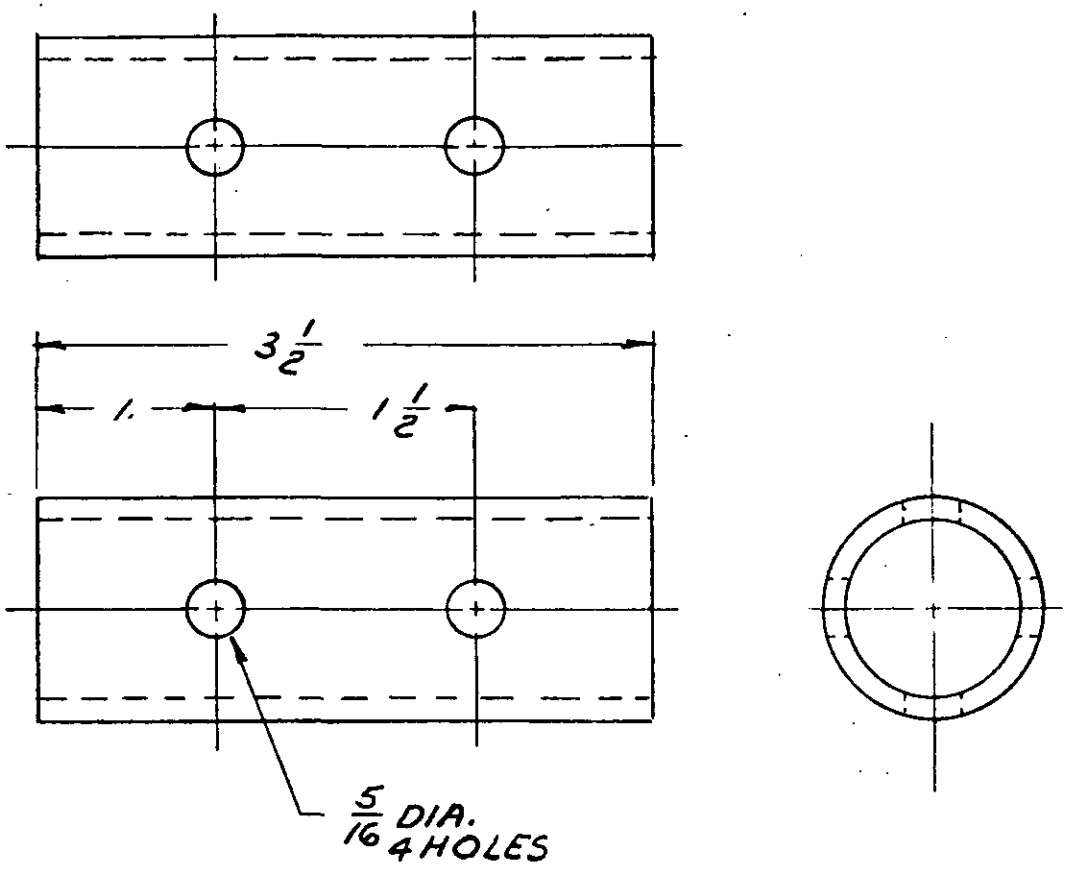

MATERIAL NOTE:
SEE NOTE II, FIG 51

FIGURE 54
TUBE, CONNECTOR

Source: https://assist.dla.mil -- Downloaded: 202640-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST- SIDE TUBE ASSEMBLY

ITEM NO.	FIG NO	PART NAME	REQ'D.
1	57	TUBE, SIDE	1
2	58	BRACKET, TUBE END	1
3	59	PLATE, BOTTOM	1

SPECIFICATIONS

MATERIAL NOTE:

I STEEL CARBON TUBING
COMPOSITION FS1000
TYPE I, III, OR IV CONDITION HR, W, CDSR
SPEC. QQ-T-830
1. O.D. x .065 WALL THICKNESS

II STEEL CARBON FS1010 THRU FS1025
SPEC. QQ-S-698
1/8 THICK

WELDING NOTE - STEEL:

I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE

I BASE PHOSPHATE
IN ACCORDANCE WITH TYPE I
SPEC TT-C-490
PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 55A

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.


NOTE:

I DISTANCE MARKED ⊗ TO BE FREE OF PAINT.

II UNPAINTED TUBE ENDS TO BE COATED WITH MIL-C-16173 CORROSION PREVENTIVE OR TT-C-490, TYPE I PHOSPHATE PROTECTIVE COATING

FIGURE 55B

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

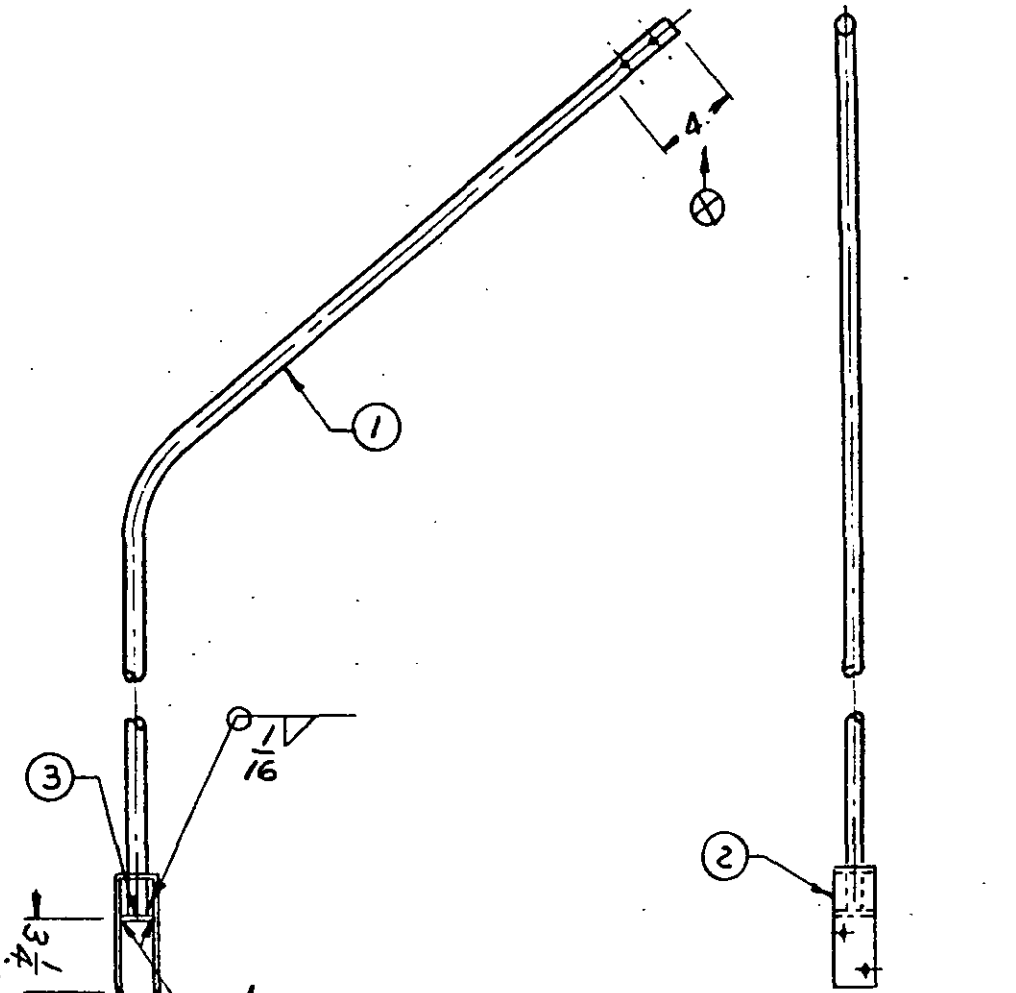


NOTE:
⊗ SEE NOTES I & II, FIG. 56

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 55

WELDING NOTE:
SEE NOTE I, FIG. 55

FIGURE 56
SIDE TUBE ASSEMBLY


Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the currenversion before use.

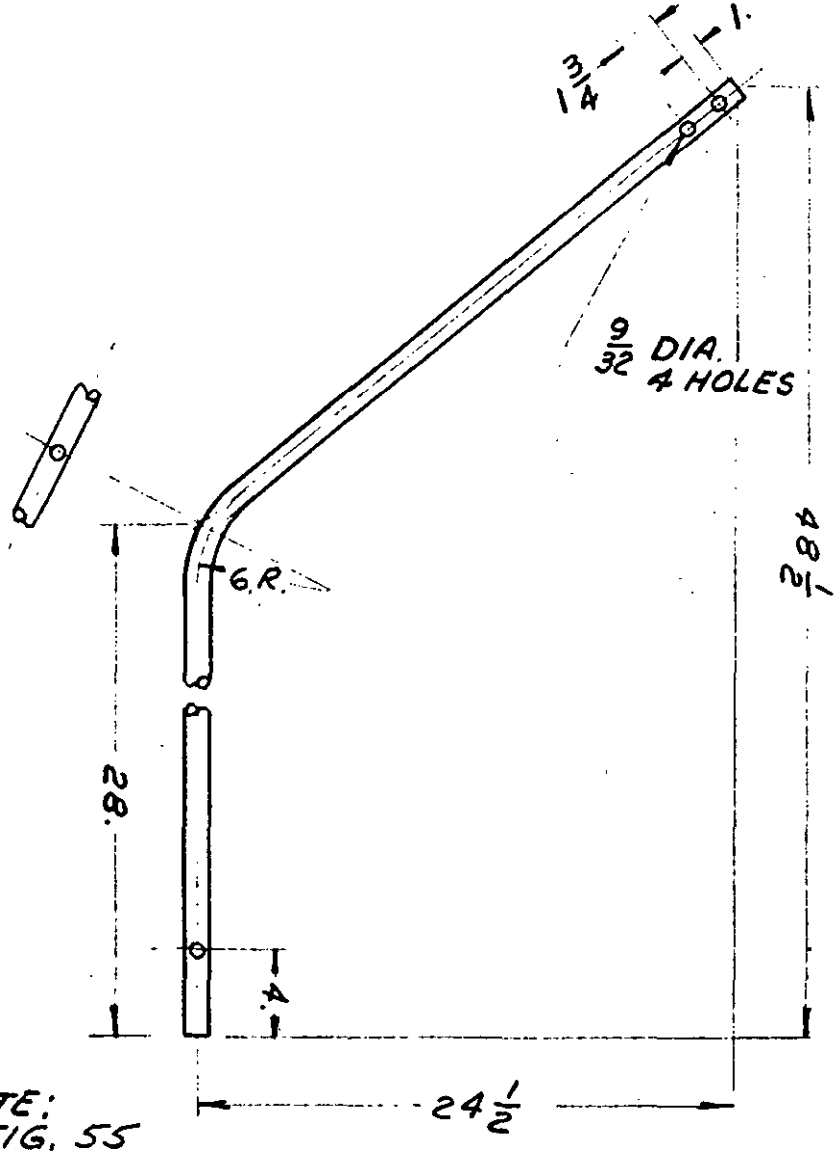

MATERIAL NOTE:
SEE NOTE I, FIG. 55

FIGURE 57
SIDE TUBE


Source: https://assist.dla.mil -- Downloaded: 202640-17T18:18Z
Check the source to verify that this is the current version before use.

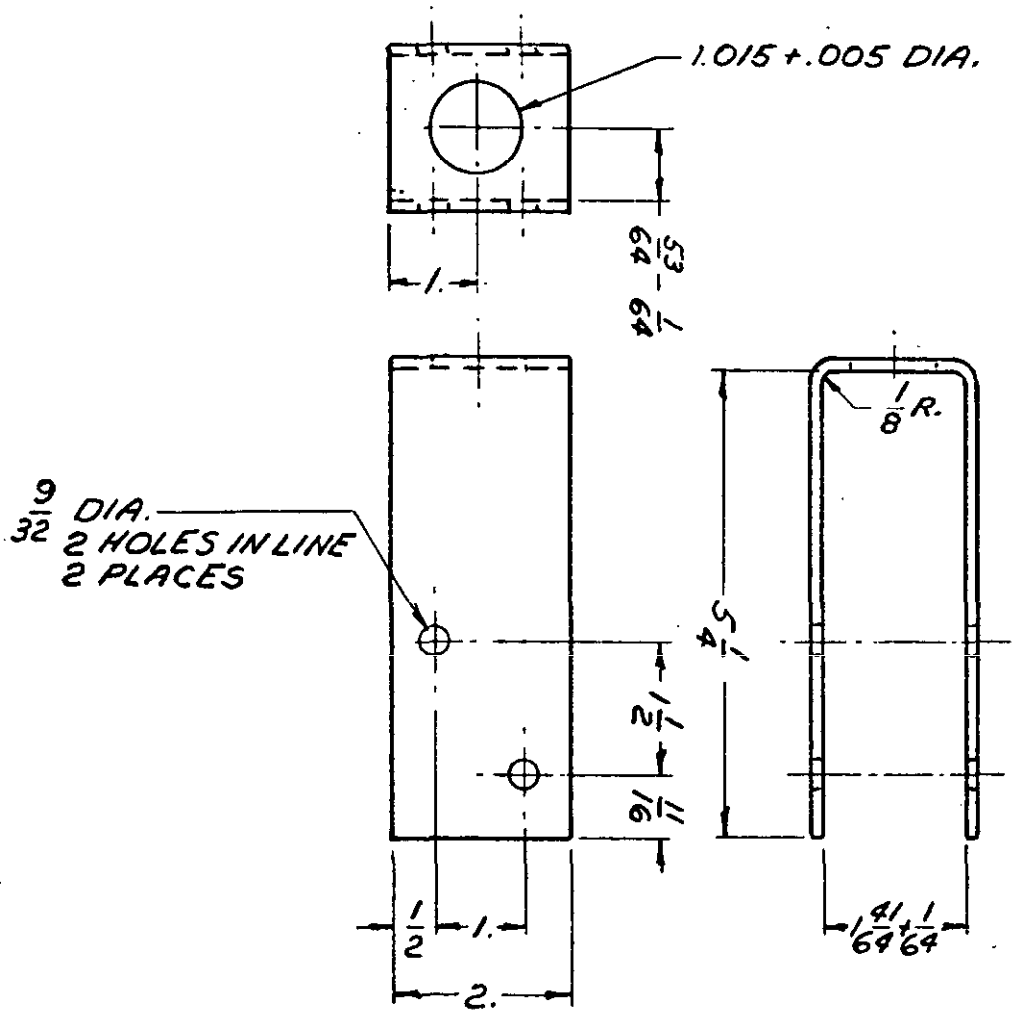

MATERIAL NOTE:
SEE NOTE II, FIG. 55

FIGURE 58
BRACKET, TUBE END

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

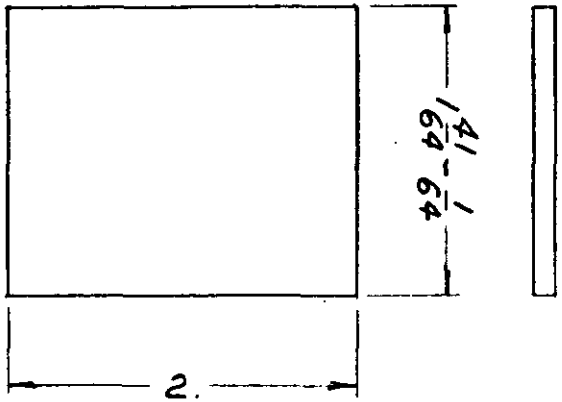

MATERIAL NOTE:
SEE NOTE II, FIG.55

FIGURE 59
PLATE, BOTTOM

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST SIDE TUBE ASSEMBLY

ITEM NO	FIG. NO	PART NAME	REQ'D.
1	62.	TUBE, SIDE	1
2	58	BRACKET, TUBE END	1
3	59	PLATE BOTTOM	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL CARBON TUBING
COMPOSITION FS1000
TYPE I, III, OR IV CONDITION HR, W, CDSR
SPEC. QQ-T-830
1. O.D. x .065 WALL THICKNESS

WELDING NOTE - STEEL

I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I BASE PHOSPHATE
IN ACCORDANCE WITH TYPE I
SPEC. TT-C-490
PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485


NOTE:

I DISTANCE MARKED ⊗ TO BE FREE OF PAINT

II UNPAINTED TUBE ENDS TO BE COATED
WITH MIL-C-16173 CORROSION PREVENTIVE
OR TT-C-490, TYPE I
PHOSPHATE PROTECTIVE COATING

FIGURE 60

Source: https://assist.dla.mil -- Downloaded: 202640-17T18:18Z
Check the source to verify that this is the currentversion before use.

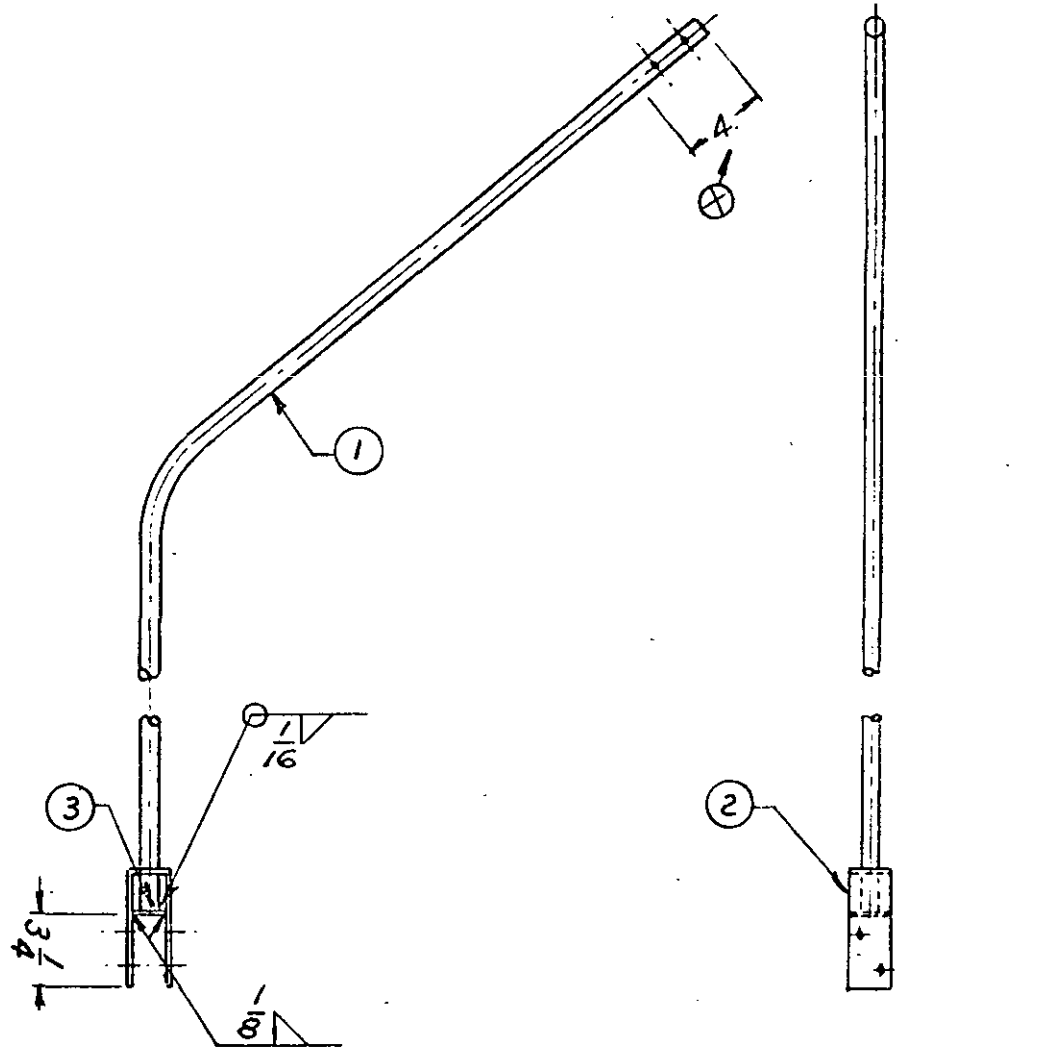


NOTE:
⊗ SEE NOTE I & II
FIG. 60

PROTECTIVE
FINISH NOTE:
SEE NOTE I, FIG. 60

WELDING NOTE:
SEE NOTE I, FIG. 60

FIGURE 61
SIDE TUBE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

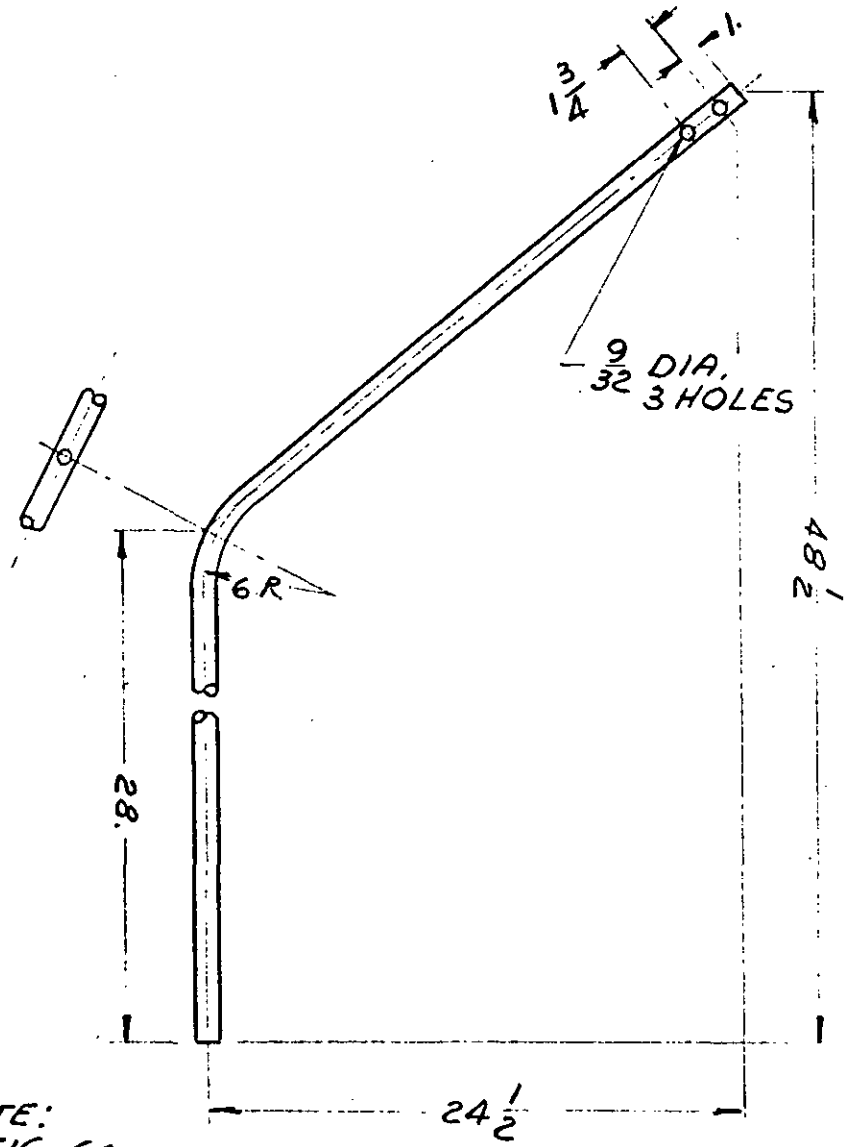

MATERIAL NOTE:
SEE NOTE I, FIG. 60

FIGURE 6.2
SIDE TUBE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST - SIDE TUBE ASSEMBLY

ITEM NO.	FIG NO.	PART NAME	REQ'D.
1	65	TUBE, SIDE	1
2	58	BRACKET, TUBE END	1
3	59	PLATE, BOTTOM	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL CARBON TUBING
COMPOSITION FS1000
TYPE I, III, OR IV CONDITION HR, W, COSR
SPEC. QQ-T-830
1. O.D. x .065 WALL THICKNESS

WELDING NOTE:

I WELD IN ACCORDANCE
SPEC MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE

I BASE PHOSPHATE
IN ACCORDANCE WITH TYPE I
SPEC TT-C-490
PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL, SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485


NOTE,

I DISTANCE MARKED ⊗ TO BE FREE OF PAINT

II UNPAINTED TUBE ENDS TO BE COATED WITH
MIL-C-16173 CORROSION PREVENTIVE OR
TT-C-490, TYPE I PHOSPHATE
PROTECTIVE COATING

FIGURE 63

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

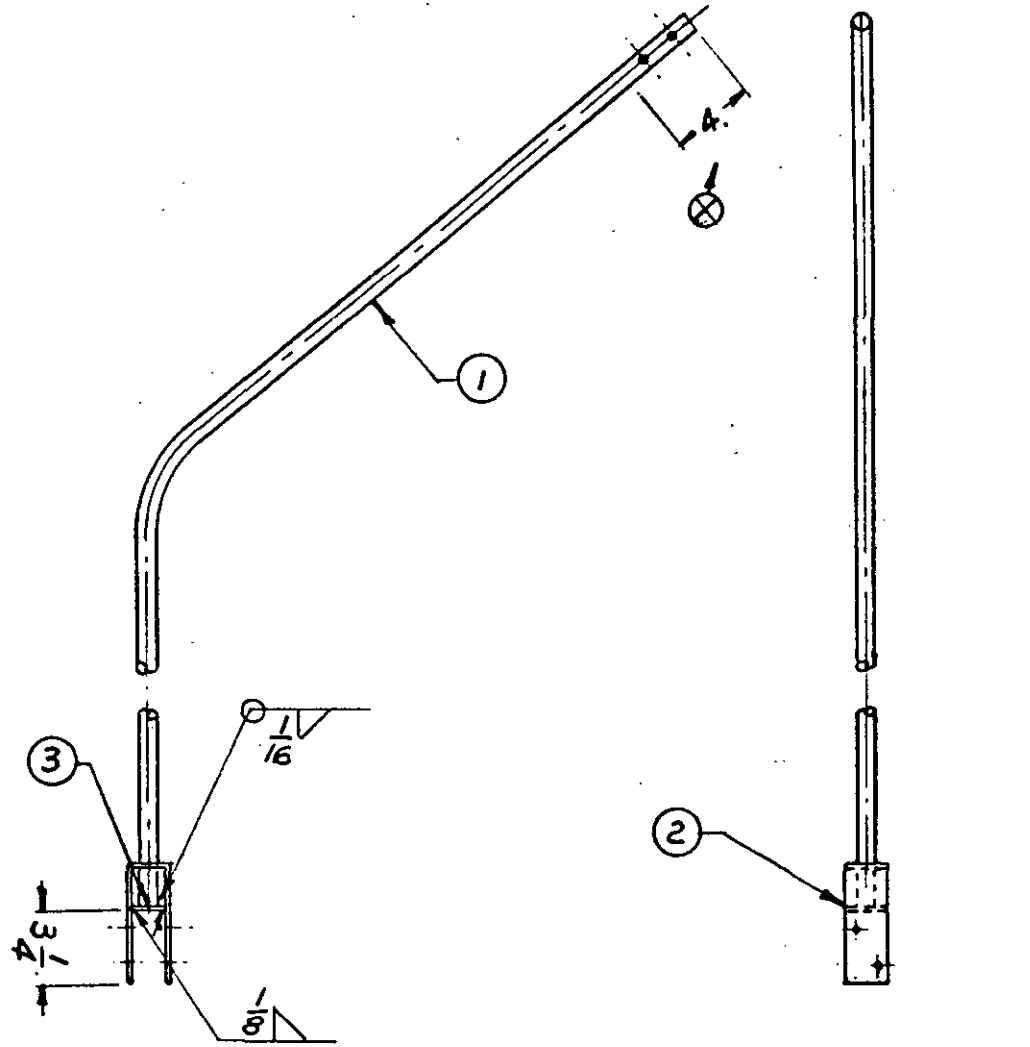


NOTE:
⊗ SEE NOTE I & II, FIG. 63

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 63

WELDING NOTE:
SEE NOTE I, FIG 63

FIGURE 64
SIDE TUBE ASSEMBLY

Source: https://assist.dla.mil — Downloaded: 2026-04-17T18:18Z
Check the source to verify that this is the current version before use.

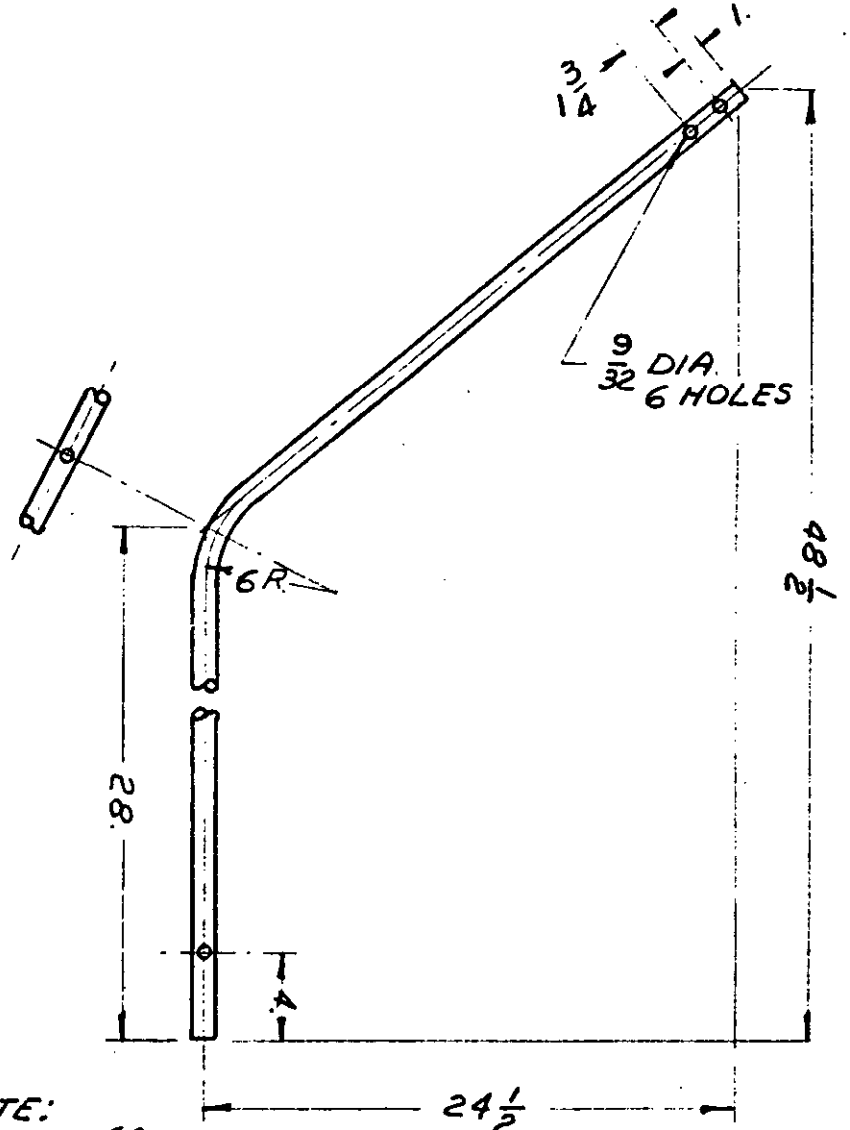

MATERIAL NOTE:
SEE NOTE I, FIG. 63

FIGURE 6.5
SIDE TUBE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST - SIDE TUBE ASSEMBLY

ITEM NO	FIG. NO.	PART NAME	REQ'D.
1	68	TUBE, SIDE	1
2	58	BRACKET, TUBE END	1
3	59	PLATE BOTTOM	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL CARBON TUBING
COMPOSITION FS 1000
TYPE I, III, OR IV CONDITION HR, W, CDSR
SPEC. QQ-T-830
1 O.D. x .065 WALL THICKNESS

WELDING NOTE - STEEL:

I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE

I BASE PHOSPHATE
IN ACCORDANCE WITH TYPE I
SPEC. TT-C-490
PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485


NOTE:

I DISTANCE MARKED ⊗ TO BE FREE OF PAINT

II UNPAINTED TUBE ENDS TO BE COATED
WITH MIL-C-16173 CORROSION
PREVENTIVE OR TT-C-490,
TYPE I PHOSPHATE PROTECTIVE COATING

FIGURE 66

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

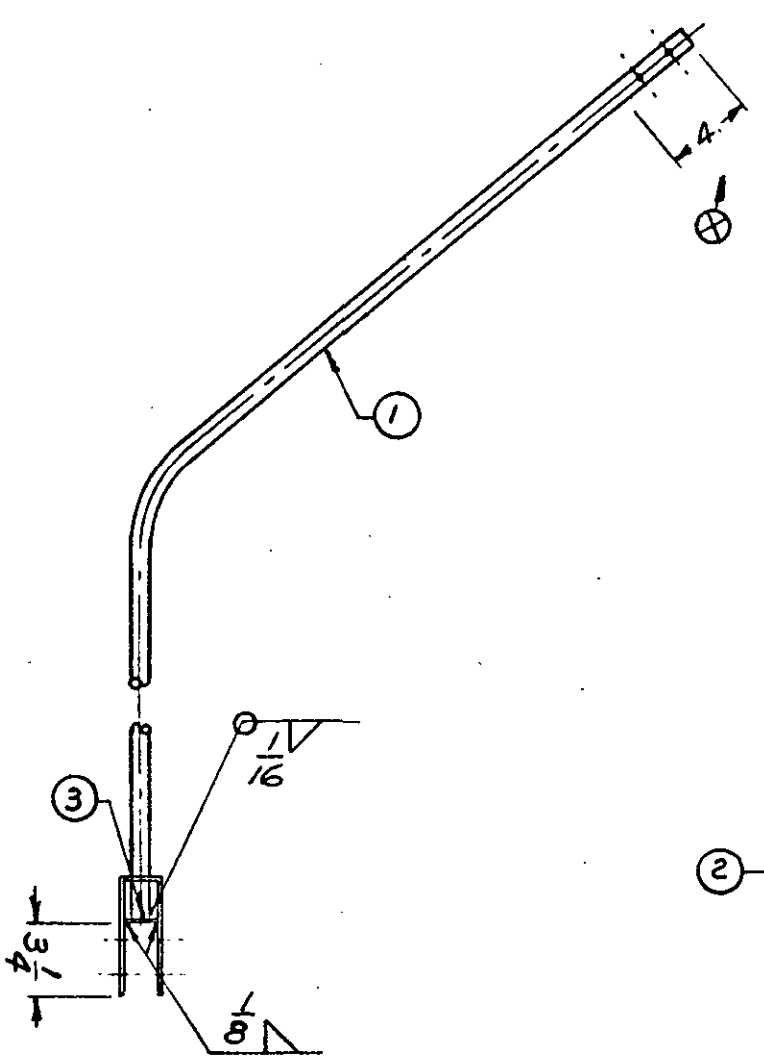


NOTE
⊗ SEE NOTES I & II, FIG 66

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 66

WELDING NOTE:
SEE NOTE I, FIG. 66

FIGURE 67
SIDE TUBE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

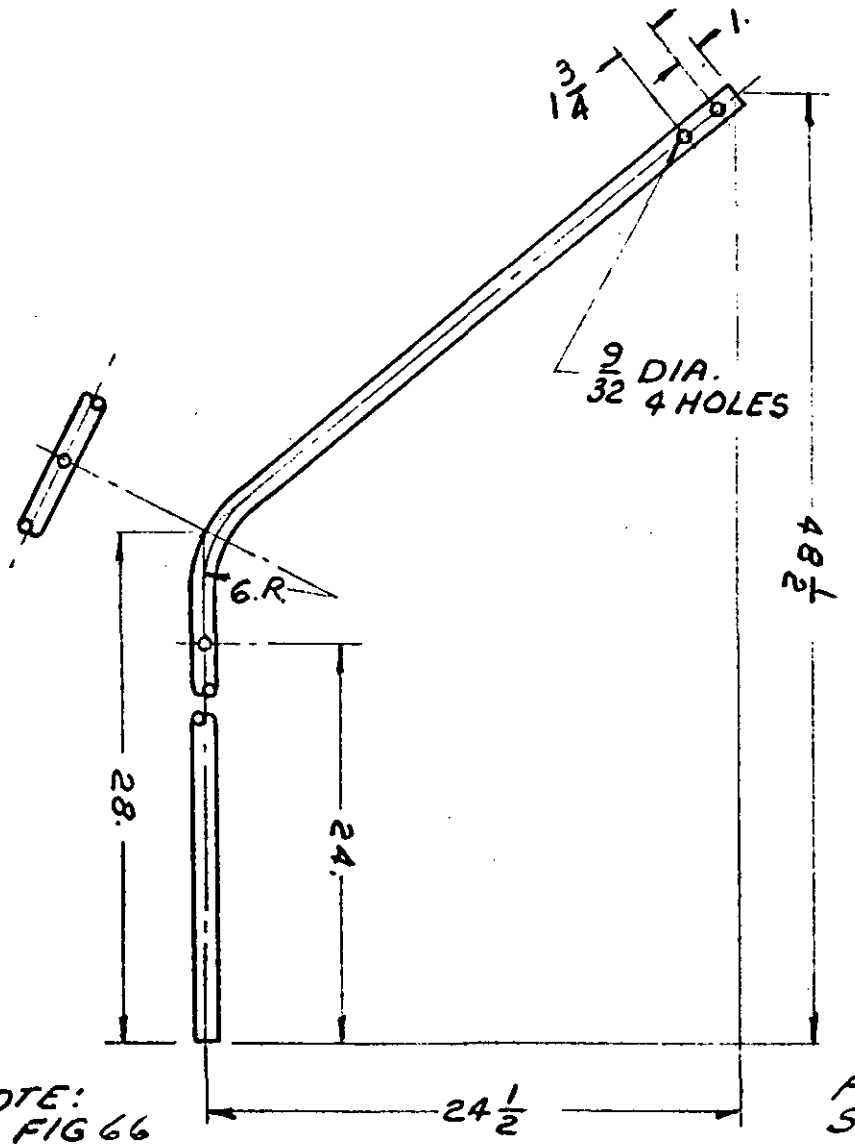

MATERIAL NOTE:
SEE NOTE I, FIG 66

FIGURE 68
SIDE TUBE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST - INSTALLATION WATERSHED COVER

ITEM NO.	FIG NO.	PART NAME	REQ'D.
1	79	COVER ASSEMBLY	1
2	74	CLAMP	32
3	75	ROD, HOLD DOWN	4
4	76	ROD, HOLD DOWN	2
5	77	ROD, HOLD DOWN	4

ITEM NO	REQ'D	PART NAME	SIZE	ORDNANCE PART NO.
6	1	CORD, ELASTIC SHOCK ABSORBER MIL-C-5651	3/8 DIA. x 24 FT. LG	
7	64	SCREW, WOOD, FLAT HD.	#8 x 1 1/2 LG.	129544


SPECIFICATIONS;

MATERIAL NOTE:

I ALUMINUM ALLOY (GIS)
TEMPER T6
SPEC. QQ-A-225/8 OR QQ-A-200/8

FIGURE 69


Source: https://assist.dla.mil -- Downloaded: 202640-17T18:18Z
Check the source to verify that this is the current version before use.

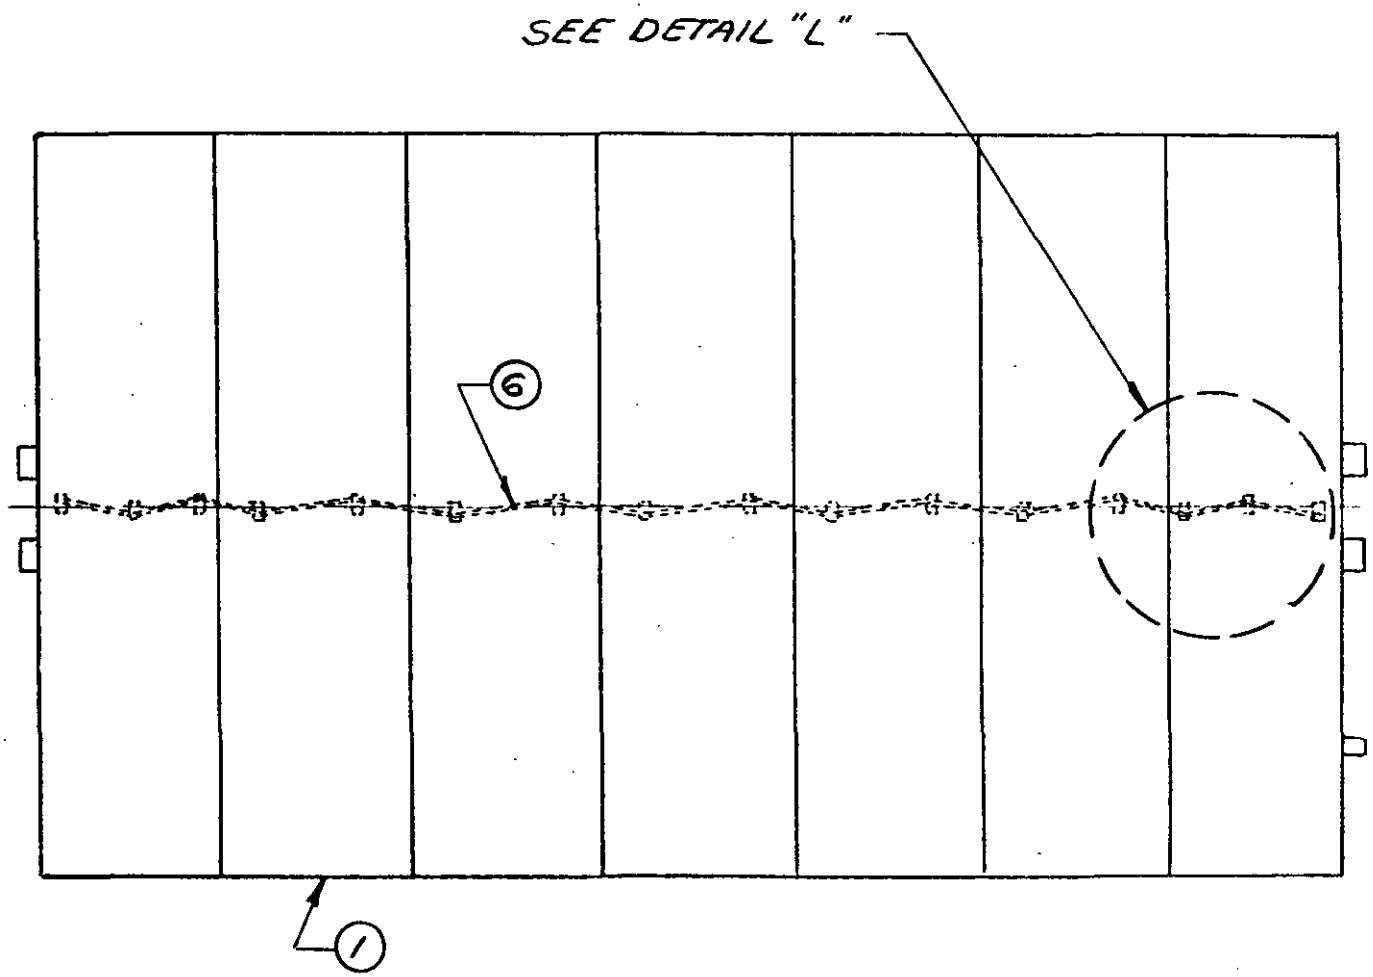

FOR DETAIL "L"
SEE FIG. 71

FIGURE 70A
INSTALLATION WATERSHED
COVER - PLAN VIEW


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

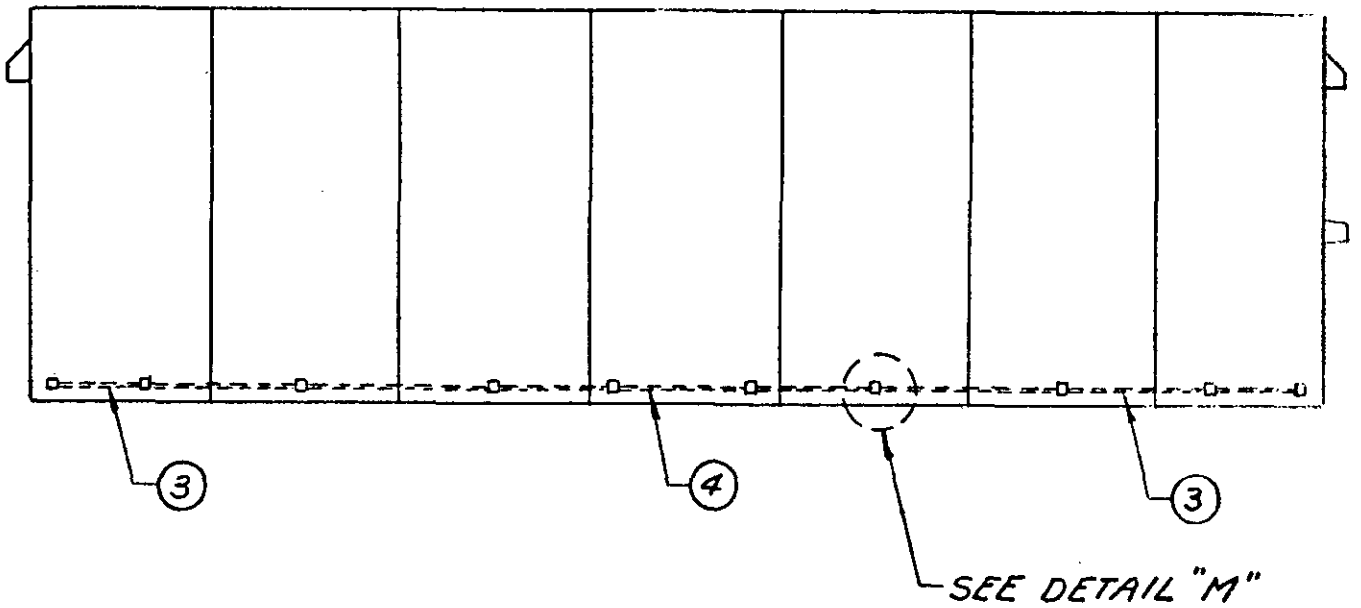

FOR DETAIL "M"
SEE FIG. 72

FIGURE 70B
INSTALLATION WATERSHED
COVER - LEFT & RIGHT ELEVATION


Source: https://assist.dla.mil - Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

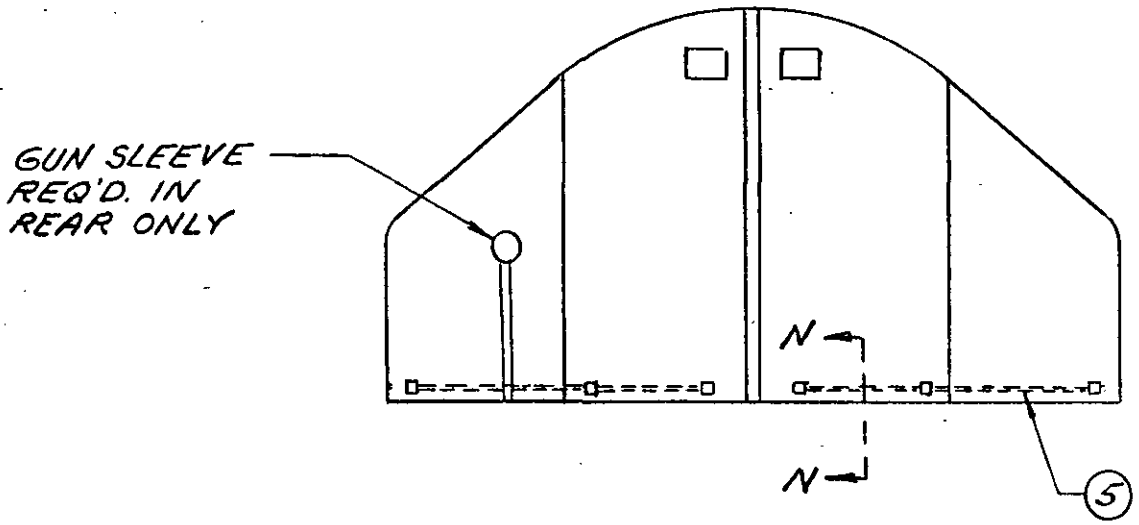

FOR SECTION N-N
SEE FIG. 73

FIGURE 70C
INSTALLATION WATERSHED COVER
FRONT & REAR ELEVATION


Source: https://assist.dla.mil -- Downloaded: 202640-17T18:18Z
Check the source to verify that this is the currenversion before use.

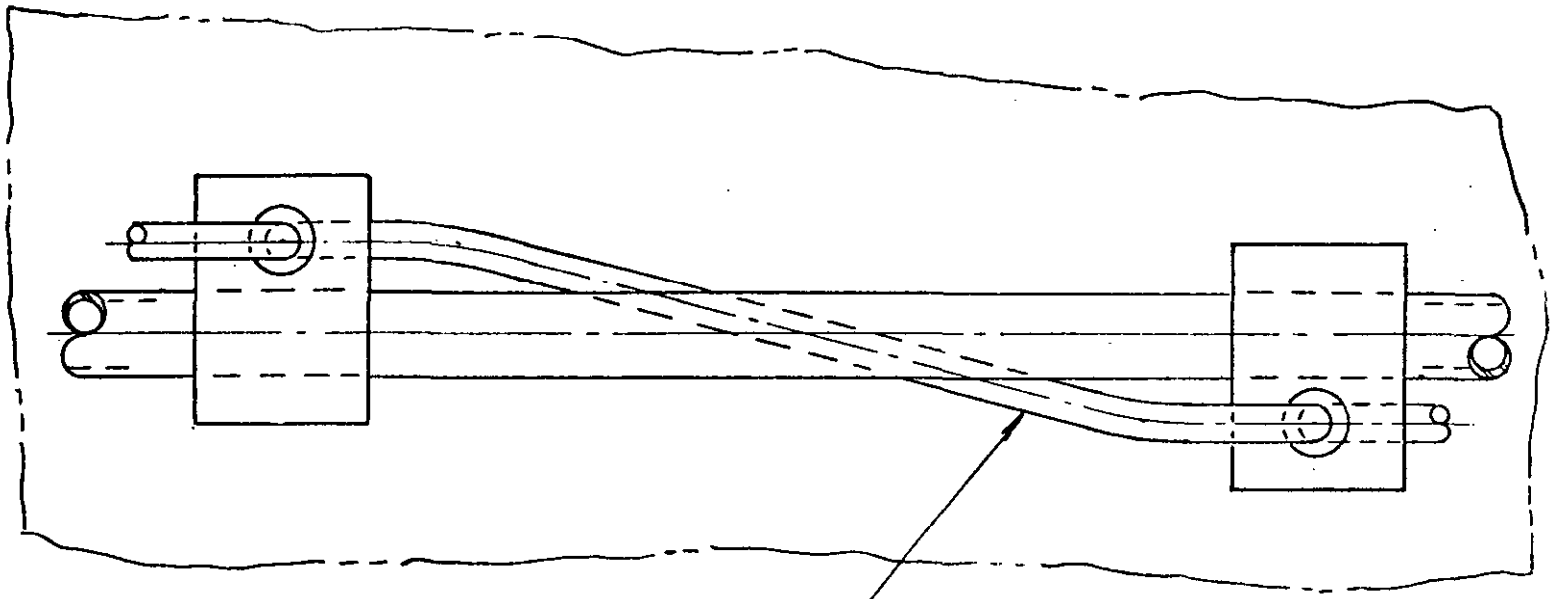

DETAIL "L"

FIGURE 71


Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

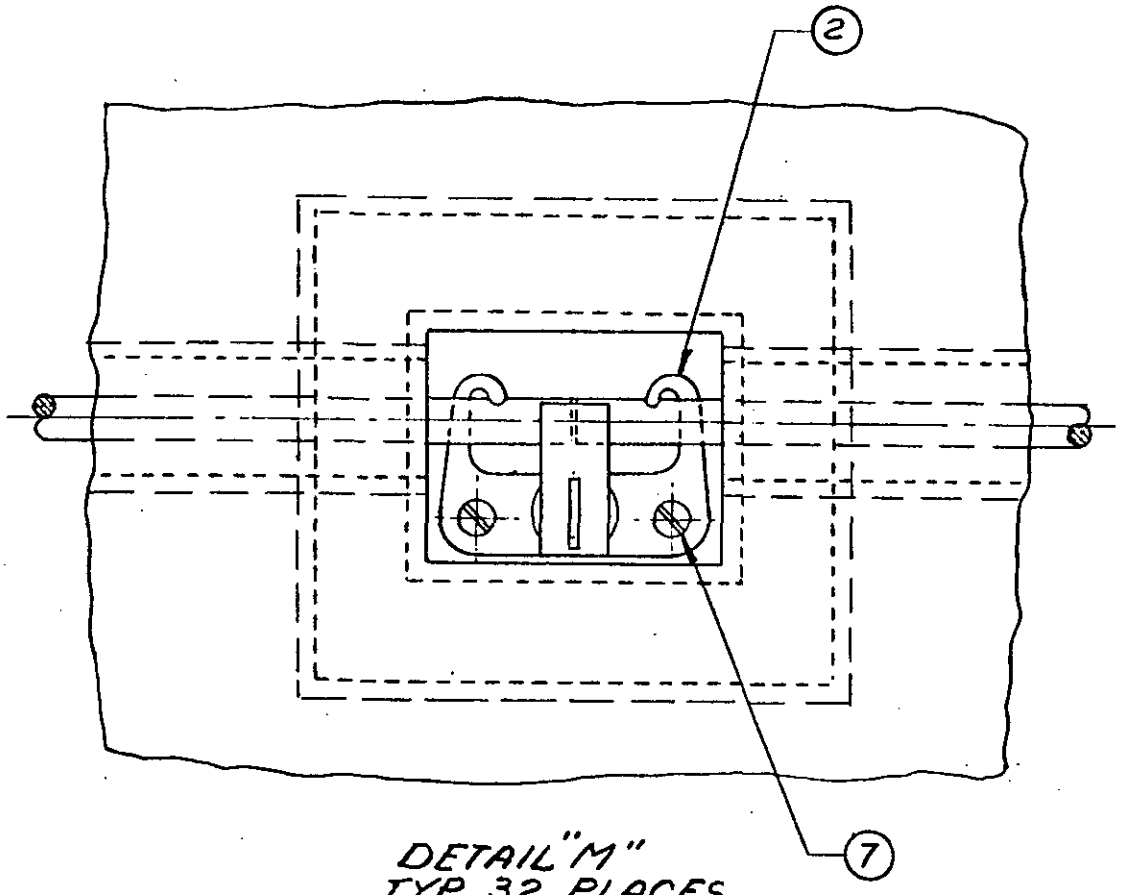

DETAIL "M"
TYP 32 PLACES

FIGURE 12


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

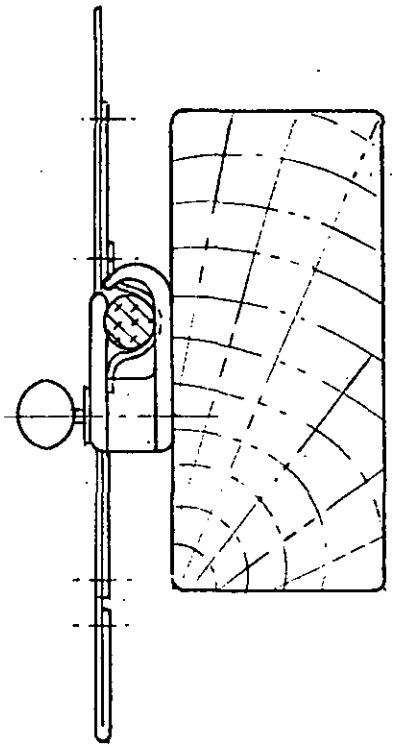

SECTION N-N
TYP 32 PLACES

FIGURE 73

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

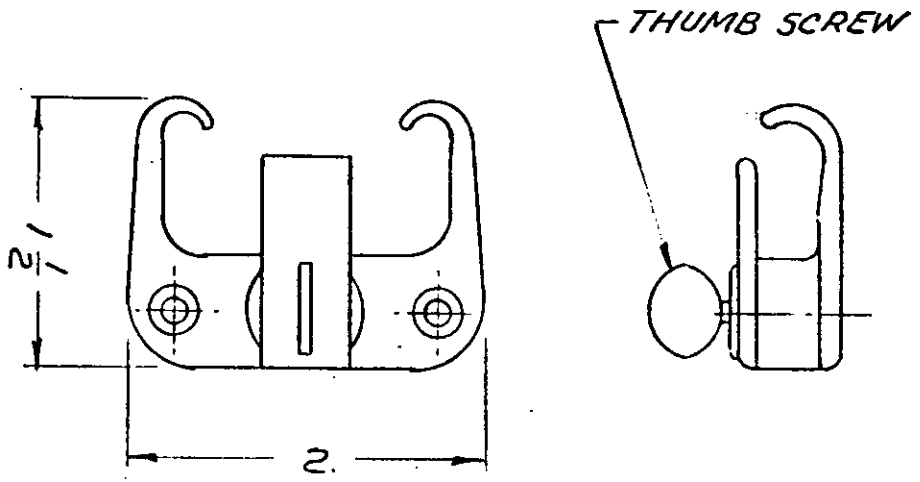

THUMB SCREW CLAMP
FOR 3/8 DIA. ROD

APPROVED SOURCE
THE GEO. WORTHINGTON CO.
THEIR NO. 11

FIGURE 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

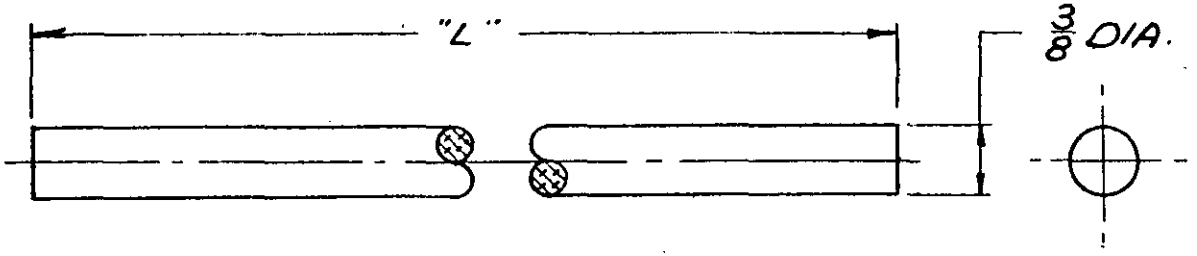


FIGURE NUMBER	REQ'D.	"L"
FIGURE 75	4	83
FIGURE 76	2	69
FIGURE 77	4	60

MATERIAL NOTE:
SEE NOTE I, FIG. 69

HOLD DOWN ROD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST - COVER ASSEMBLY, WATERSHED

ITEM NO.	FIG NO.	PART NAME	REQ'D.
1	89	SECTION OF COVER - TOP & SIDES	2
2	90	SECTION OF COVER - TOP & SIDES	4
3	91	SECTION OF COVER - TOP & SIDE	1
4	92	SECTION OF COVER - END	2
5	93	SECTION OF COVER - END	2
6	94	SECTION OF COVER - END	3
7	95	SECTION OF COVER - END	1
8	98	REINFORCEMENT	32
9	99	WEBBING	16
10	100	STRIP	4
11	101	STRIP	4
12	102	STRIP	4
13	103	STRIP	4
14	104	STRIP	2
15	105	STRIP	3
16	106	STRIP	4
17	107	STRIP	1
18	108	STRIP	1
19	109	ZIPPER FLAP	2
20	110	ZIPPER FLAP	1
21	111	GUN TUBE SLEEVE	1
22	113	VENTILATOR COVER	4
23	117	VENTILATOR FRAME	4

FIGURE 78A

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

STANDARD HARDWARE

ITEM NO	REQ'D.	PART NAME	SPEC. OR. ORD. PN
24	2	ZIPPER-INTERLOCKING, NON-SEPARATING HEAVY DUTY (SINGLE ACTION, OPEN TOP, CLOSED BOTTOM WITH NON-LOCK DOUBLE PULL REVERSIBLE SLIDER) 64. LONG	V-F-106 CLASS B SIZE H
25	1	ZIPPER-INTERLOCKING, SEPARATING, HEAVY DUTY (REGULAR, LEFT HAND WITH LOCKING SINGLE PULL NON REVERSIBLE SLIDER) 20. LONG.	V-F-106 CLASS B SIZE H
26	1	STRAP, WEBBING WITH BUCKLE AND END CLIP 5/8 WIDE x 20. LONG	501285
27	16	GROMMET BRASS SPUR # 2	

FIGURE 788

Source: https://assist.dla.mil -- Downloaded: 20261O-17T18:18Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MATERIAL NOTE:
FABRIC COATED NYLON
STYLE II TYPE NF (FLAME REQUIREMENTS OF STYLE R)
SPEC. MIL-C-20696
COLOR OLIVE DRAB OR FOREST GREEN

ALL SOURCES MUST SUPPLY AN ITEM EQUIVALENT TO THE MANUFACTURERS ITEM INDICATED, ORDNANCE CORP APPROVAL REQUIRED.

APPROVED SOURCE:
DURACOTE CORP.
RAVENNA, OHIO
THEIR MATERIAL NO. 650-44

> DENOTES MATCH POINT. LIKE NUMBERS MATCH

OPTIONAL THREAD
CLARKS "TRUSEW"
MACHINE TWIST NO. 24
ORLON, COLOR O.D.

THREAD, NYLON
TYPE II, CLASS I
SIZE F, COLOR O.D.


NOTE:
STITCHING, TYPE 301 PER SPEC. FED. STD. NO. 751
8-10 STITCHES PER INCH. SMALLEST NEEDLE SIZE FEASIBLE SHOULD BE USED IN ORDER TO ASSURE WEATHER PROOF SEAMS

SEAM ALLOWANCE MAY VARY TO SUIT MANUFACTURER.

MANUFACTURER SHALL BE RESPONSIBLE FOR FINAL FIT OF COVER

FIGURE 78C


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

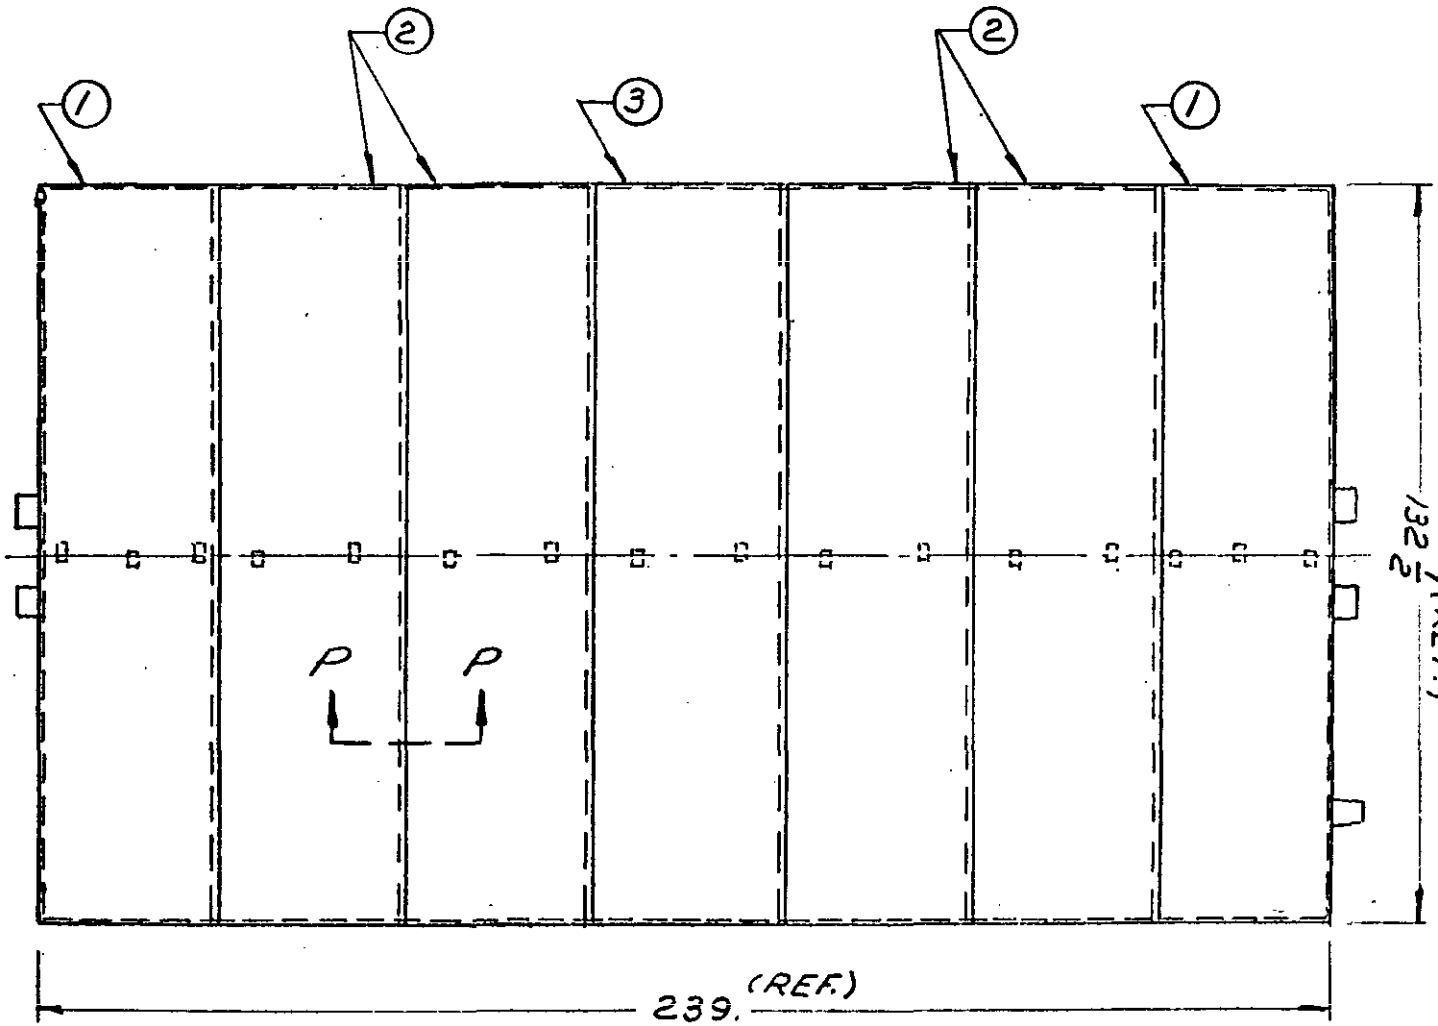

SPECIFICATIONS:
SEE FIG. 78

FIGURE 79A
WATERSHED COVER-PLAN VIEW


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

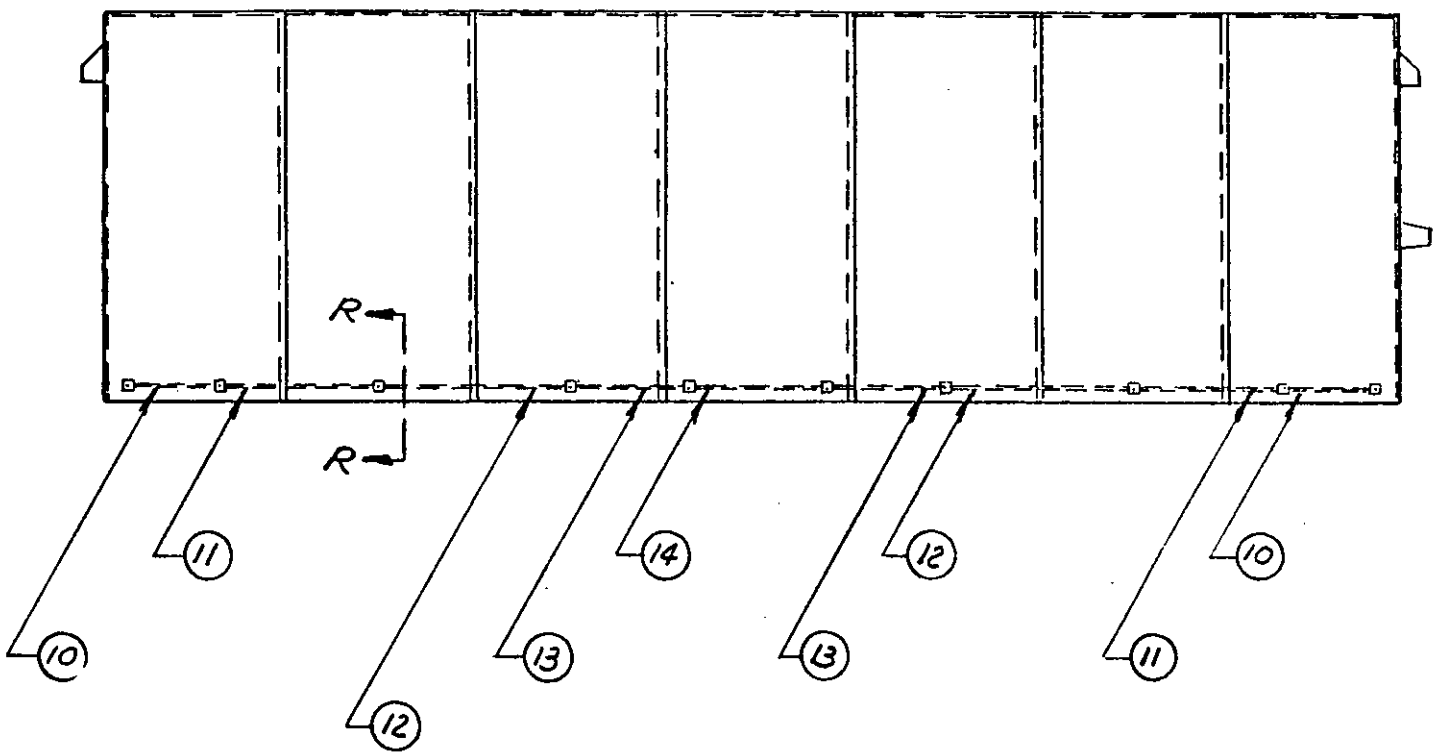

SPECIFICATIONS:
SEE FIG 78

FIGURE 79B
WATERSHED COVER
LEFT & RIGHT ELEVATION


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

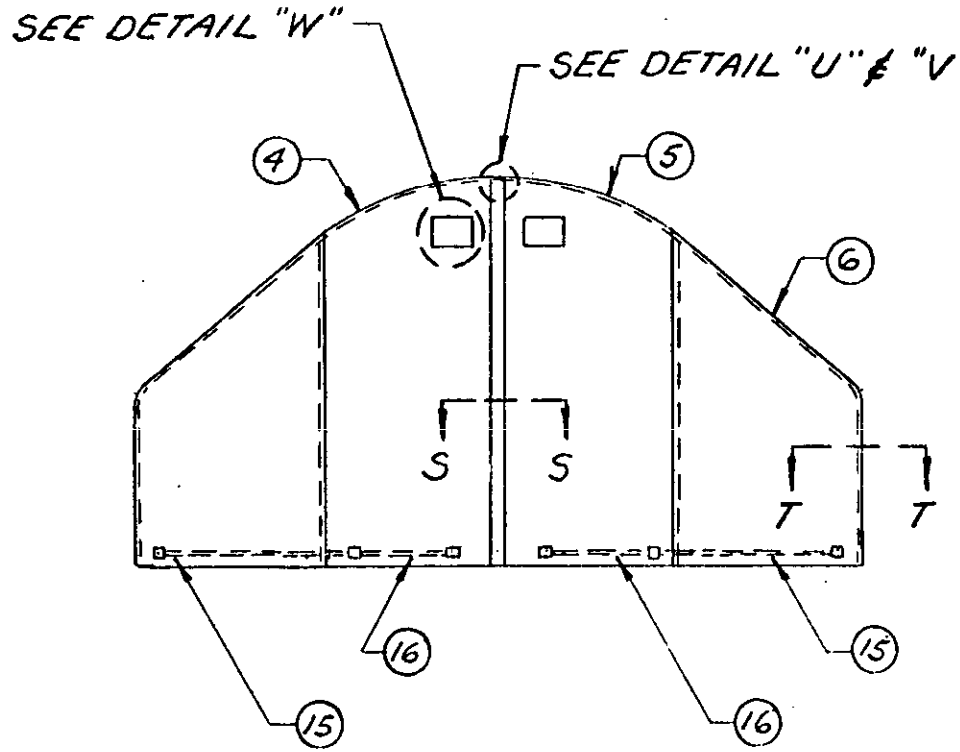

SPECIFICATIONS:
SEE FIG. 78

FIGURE 79C
WATERSHED COVER
FRONT ELEVATION


Source: https://assist.dla.mil – Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

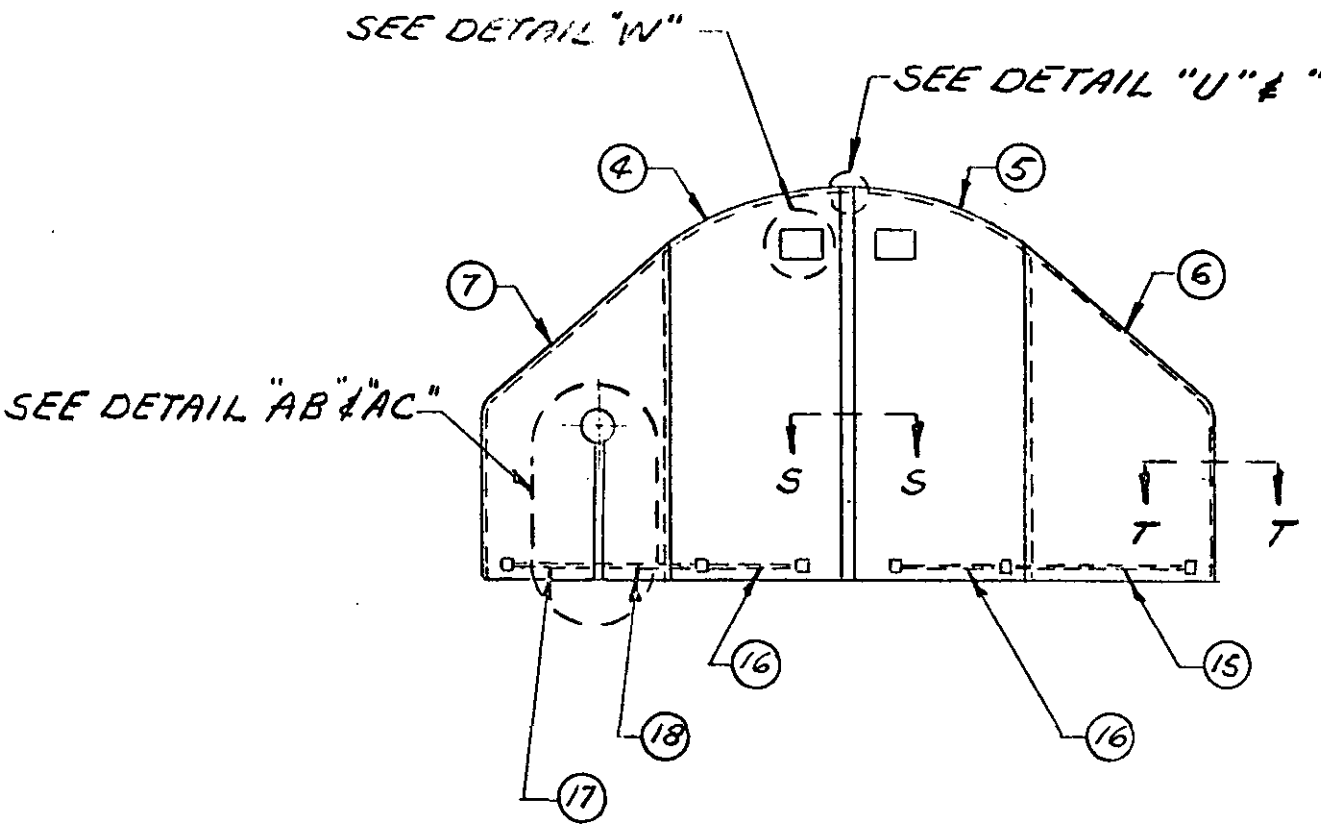


SPECIFICATIONS:
SEE FIG. 78.

FIGURE 79D
WATERSHED COVER
REAR ELEVATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

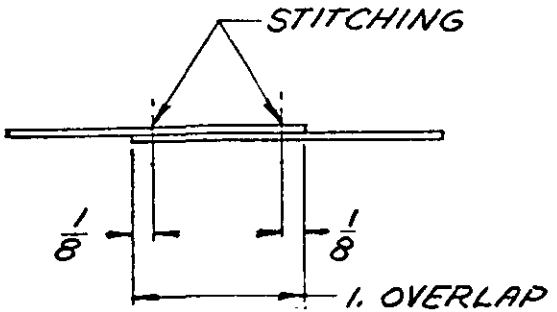

SECTION P-P
TYP. SEAM

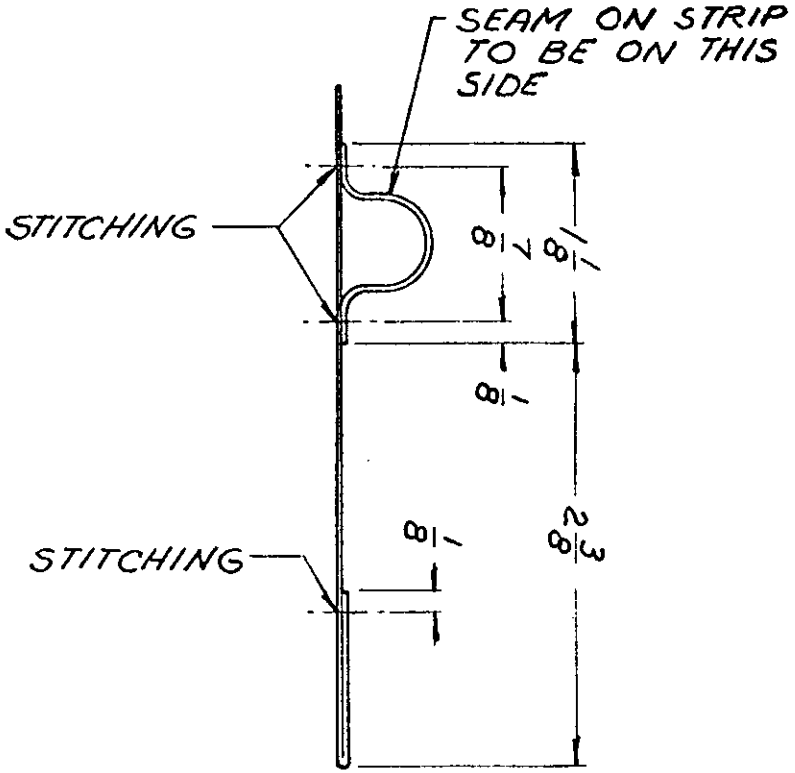


SECTION R-R


SPECIFICATIONS:
SEE FIG. 78

FIGURE 80

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

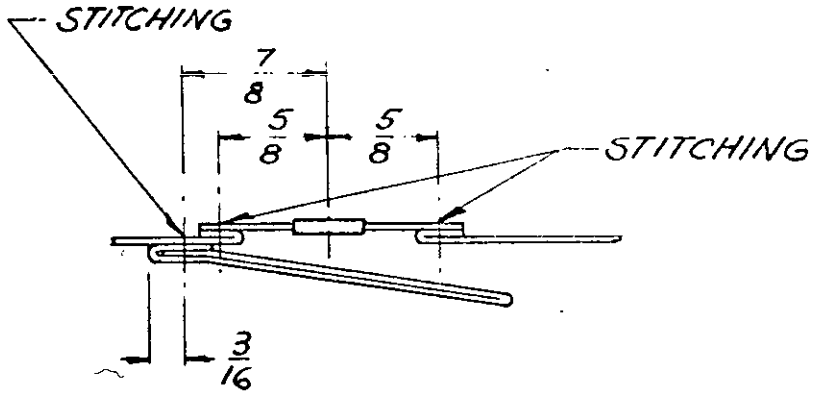

SECTION S-S
TYP. 3 PLACES

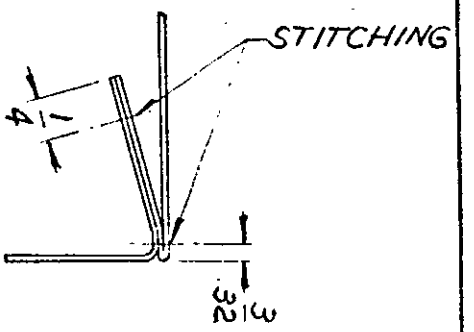


SECTION T-T
TYP. CORNER SEAM

SPECIFICATIONS:
SEE FIG. 78

FIGURE 81

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

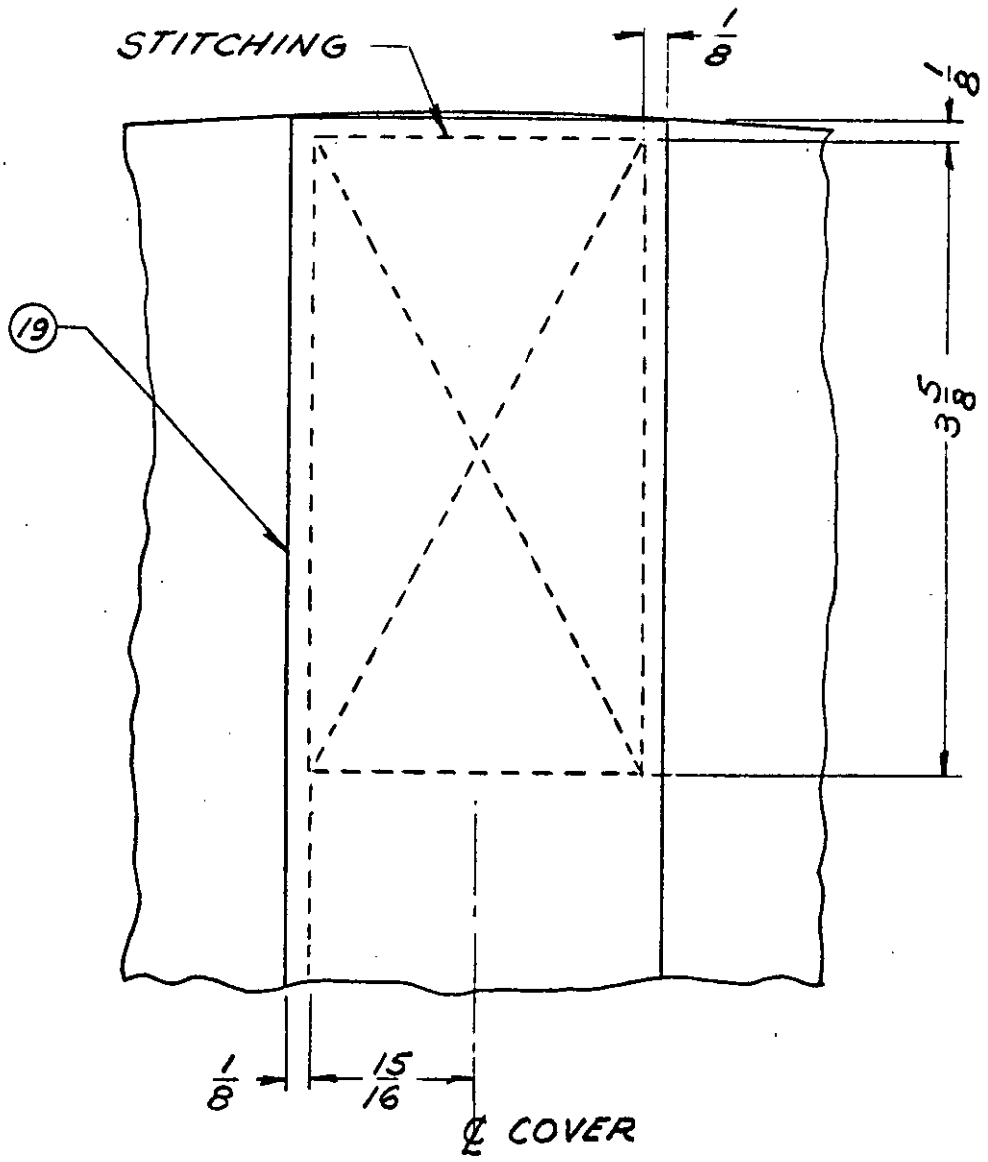


DETAIL "U"
TYP. 2 PLACES

NOTE:
SEE DETAIL "V" SHOWING
ZIPPER FLAP REMOVED

SPECIFICATIONS:
SEE FIG. 78

FIGURE 82


Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

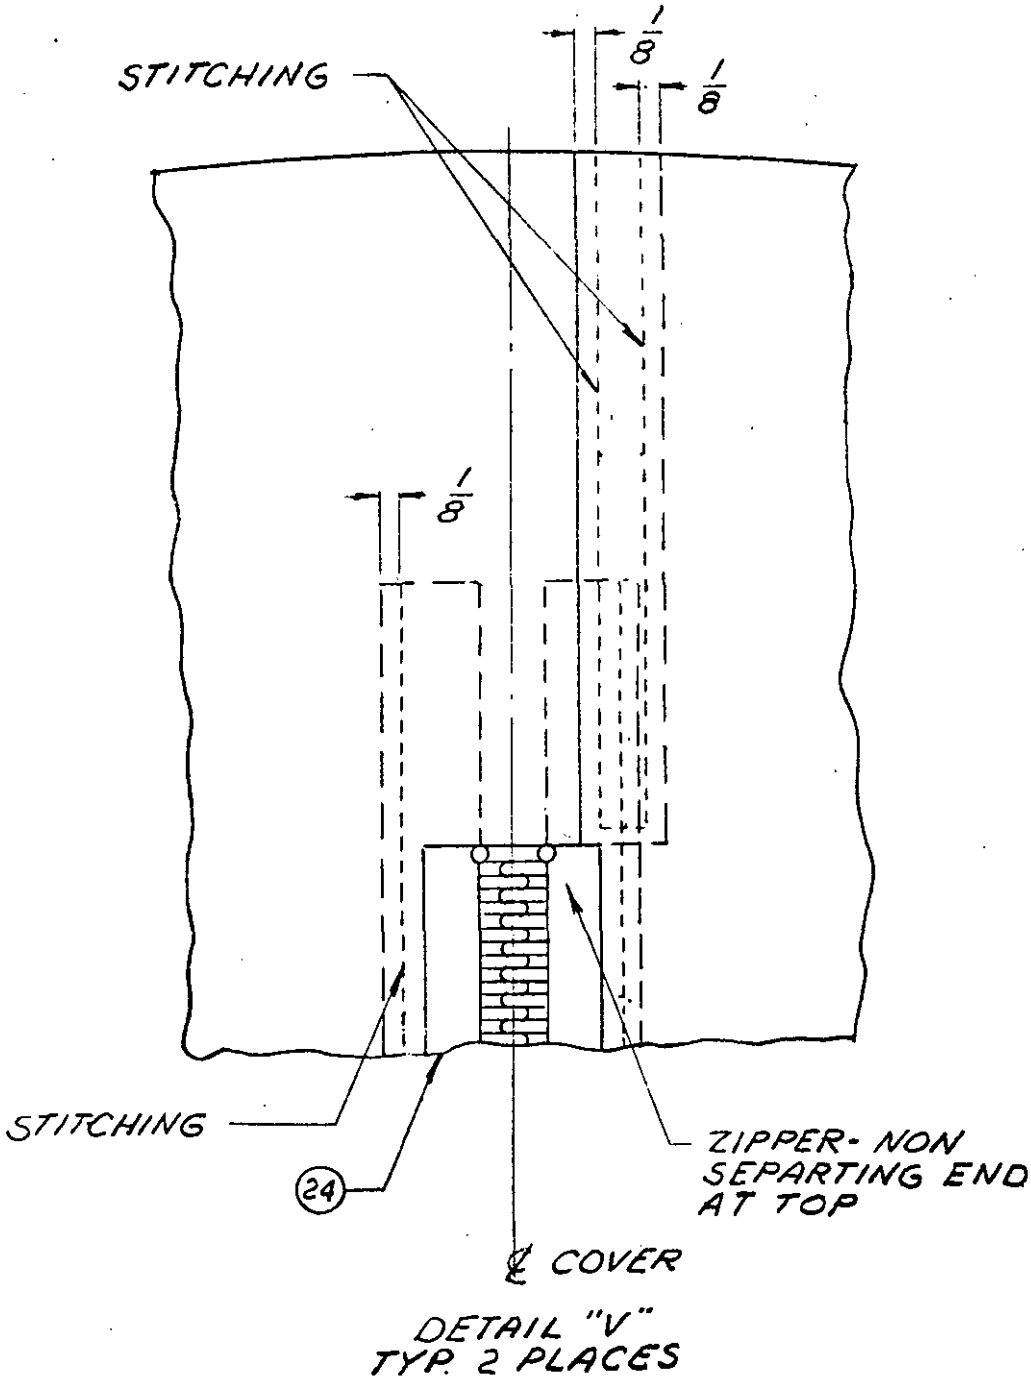

NOTE:
FIGURE 104 REMOVED TO SHOW ZIPPER

FIGURE 83

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

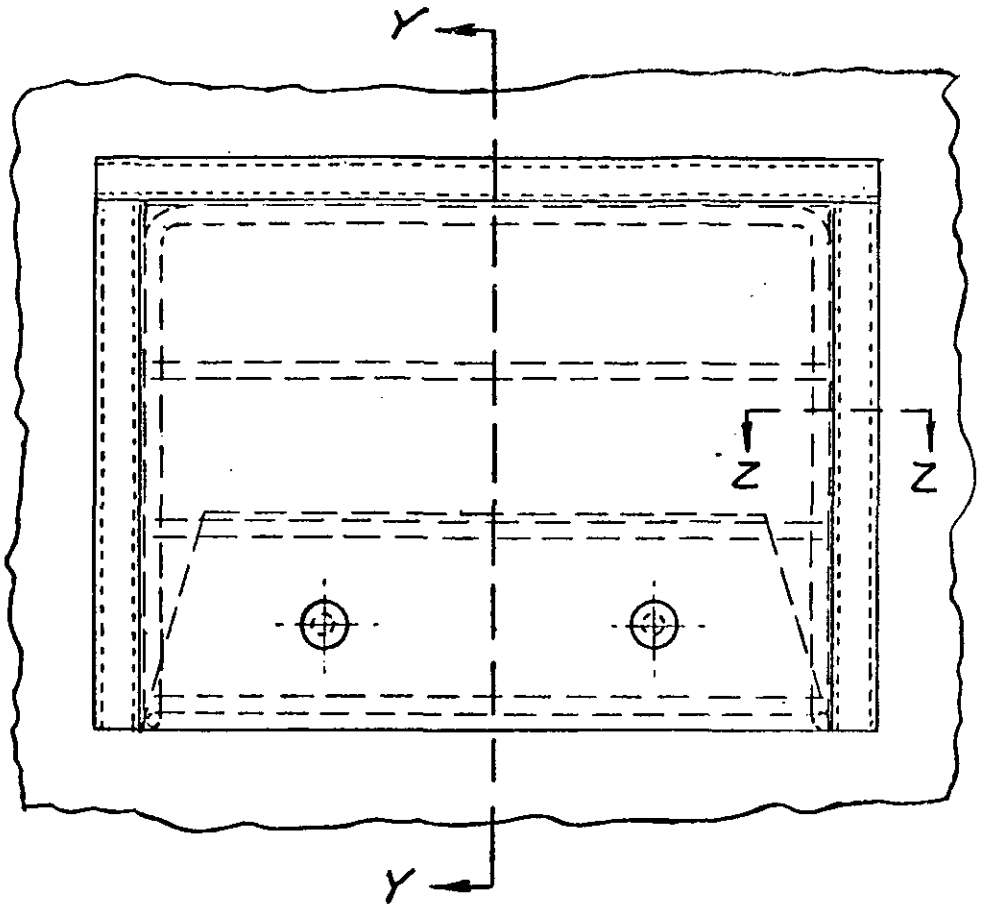


DETAIL "W"
TYP. 4 PLACES


SEE FIGURE 85
FOR SECTION

FIGURE 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

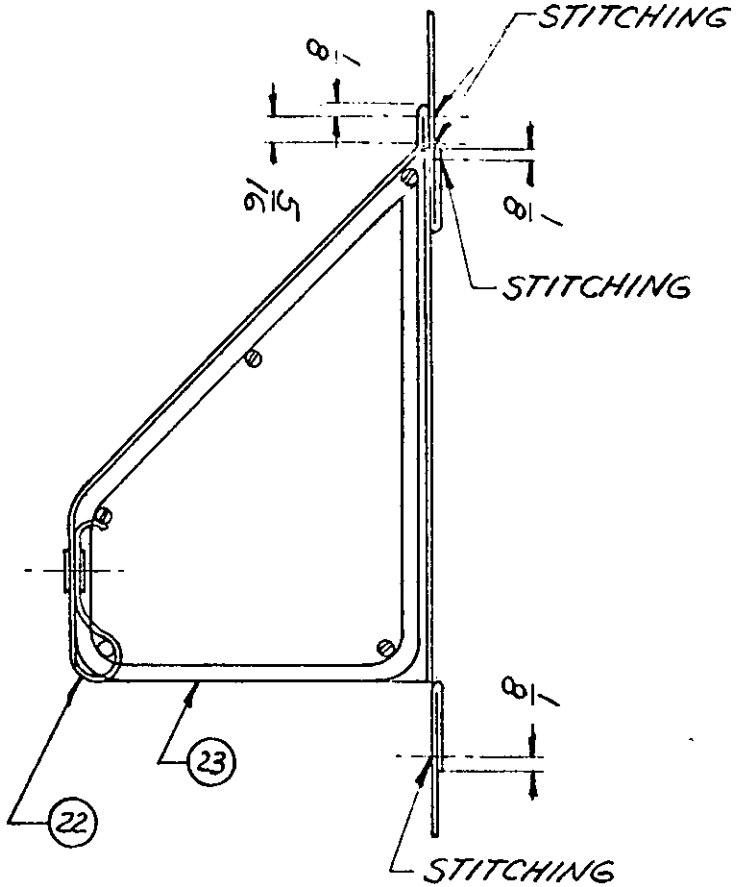

SECTION Y-Y

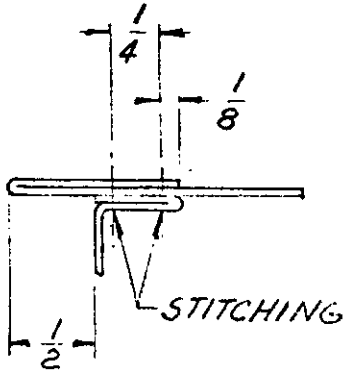


SECTION Z-Z

SPECIFICATIONS:
SEE FIG. 78

FIGURE 35

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

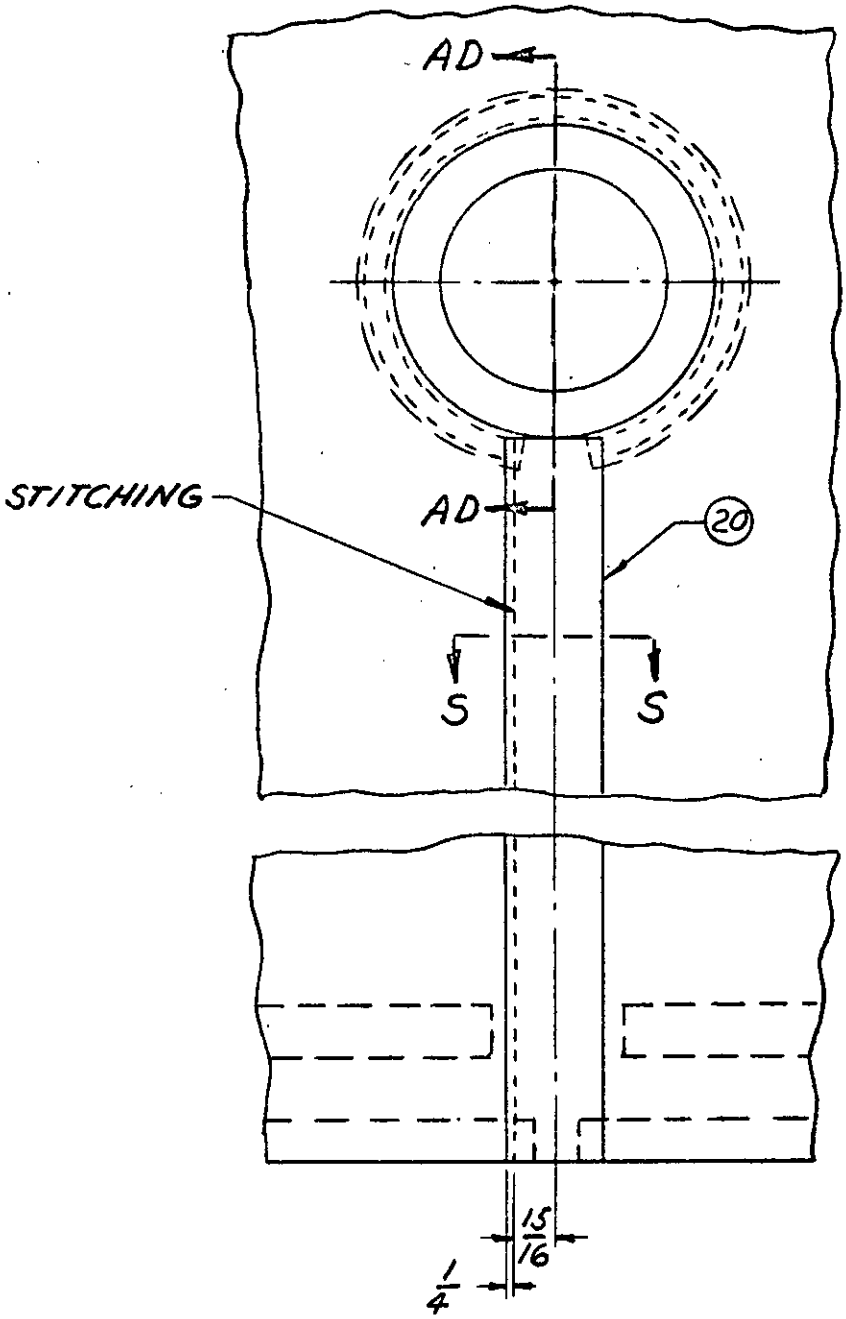


DETAIL "AB"

SPECIFICATIONS:
SEE FIG 78

FIGURE 86

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

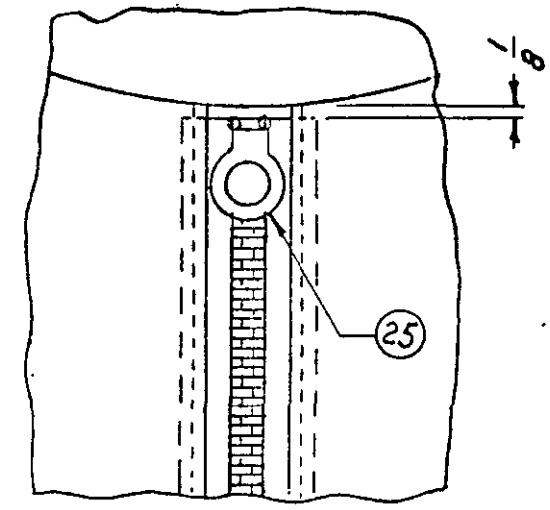

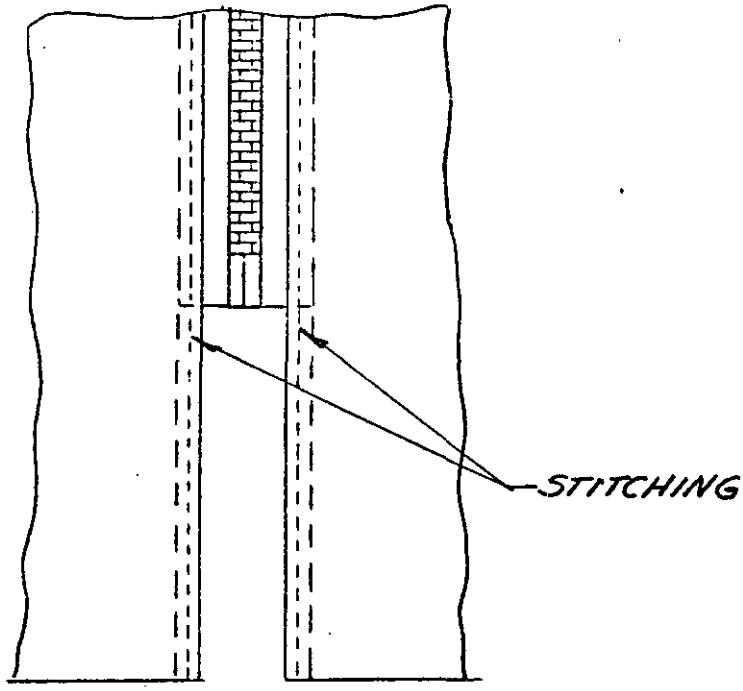



FIGURE REMOVED TO SHOW ZIPPER

DETAIL "AC"

SPECIFICATIONS: SEE FIG. 78

FIGURE 87

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

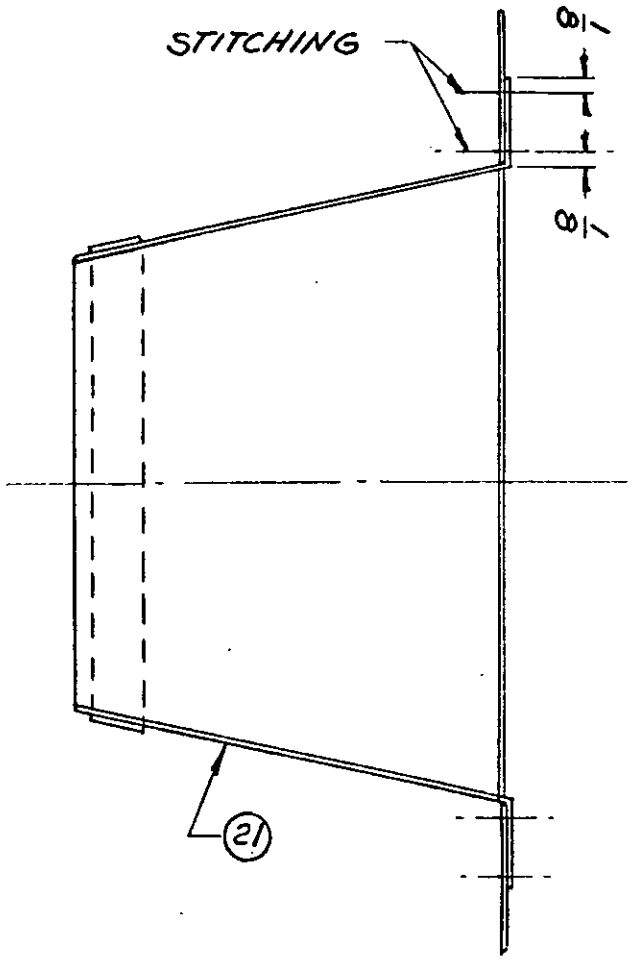


SECTION AD-AD

SPECIFICATIONS:
SEE FIG. 78

FIGURE 38


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

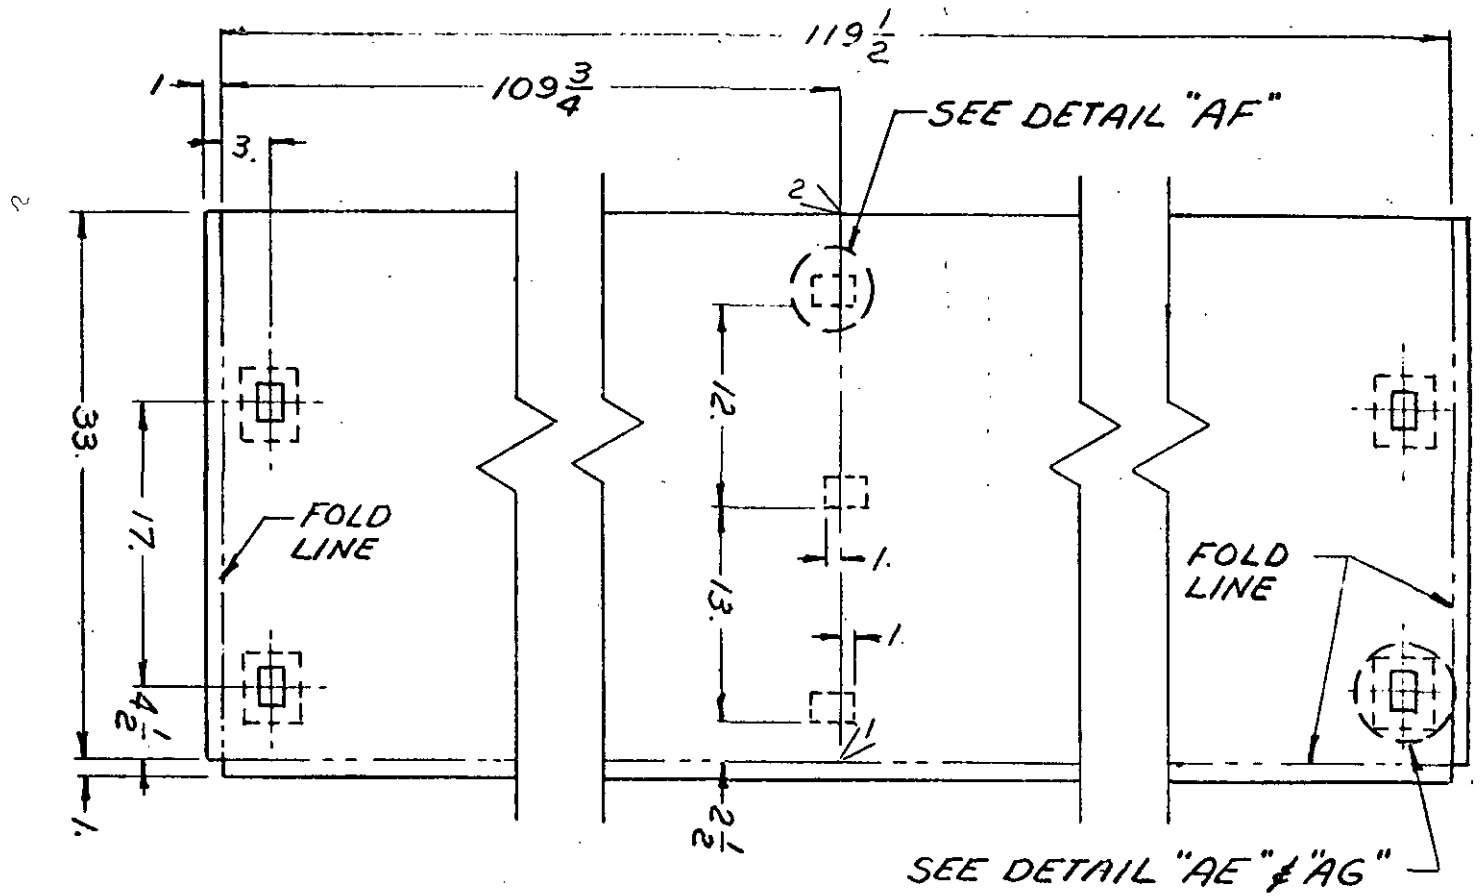

SPECIFICATIONS.
SEE FIG. 78

FIGURE 89
SECTION OF COVER TOP & SIDES


Source: https://assist.dla.mil -- Downloaded: 2026-04-17T18:40Z
Check the source to verify that this is the current version before use.

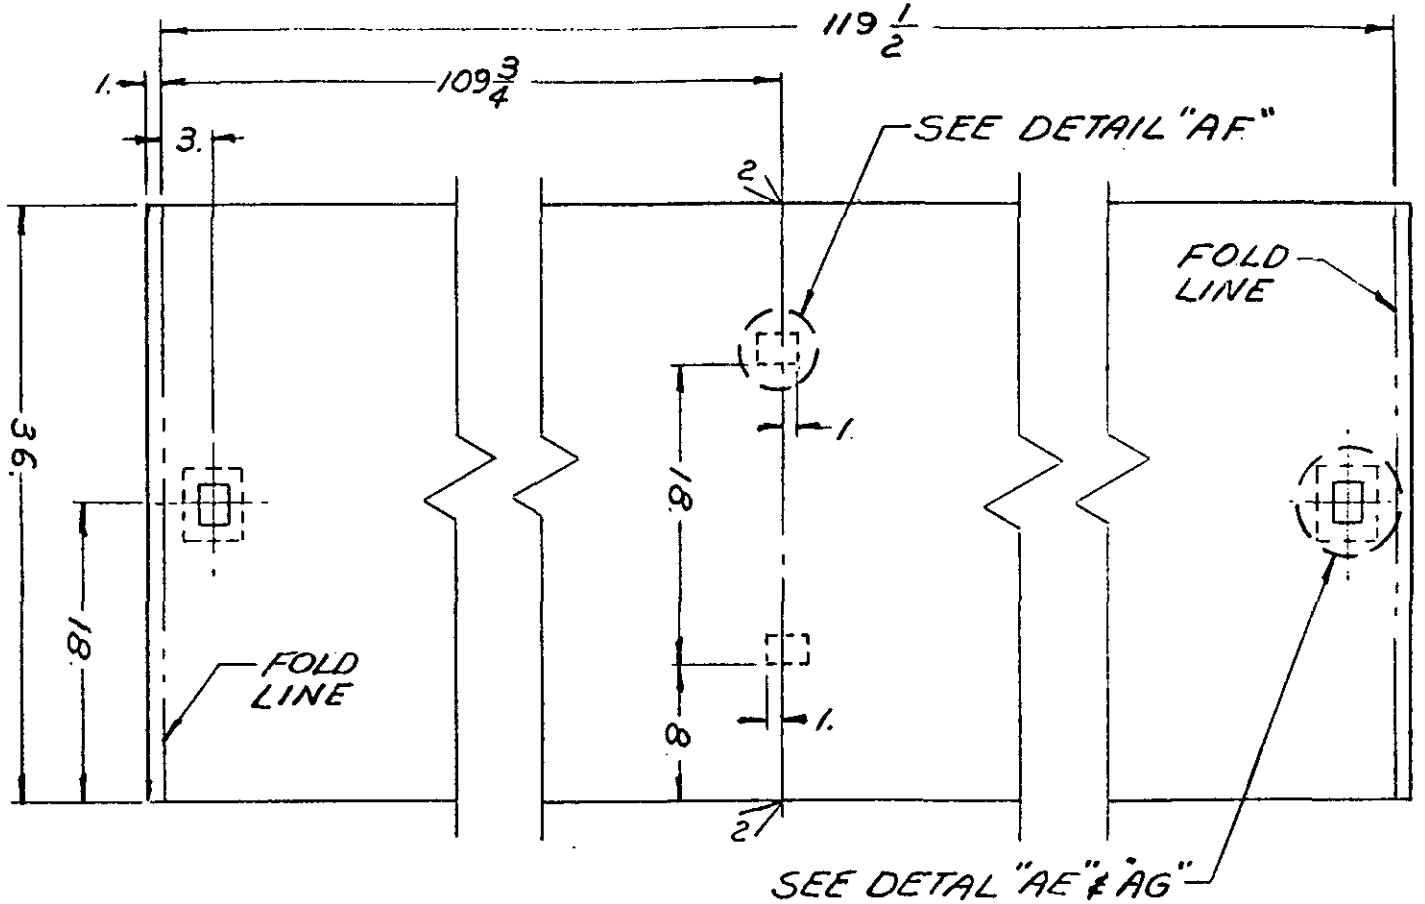

SPECIFICATIONS:
SEE FIG. 78

FIGURE 90
SECTION OF COVER TOP & SIDE


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

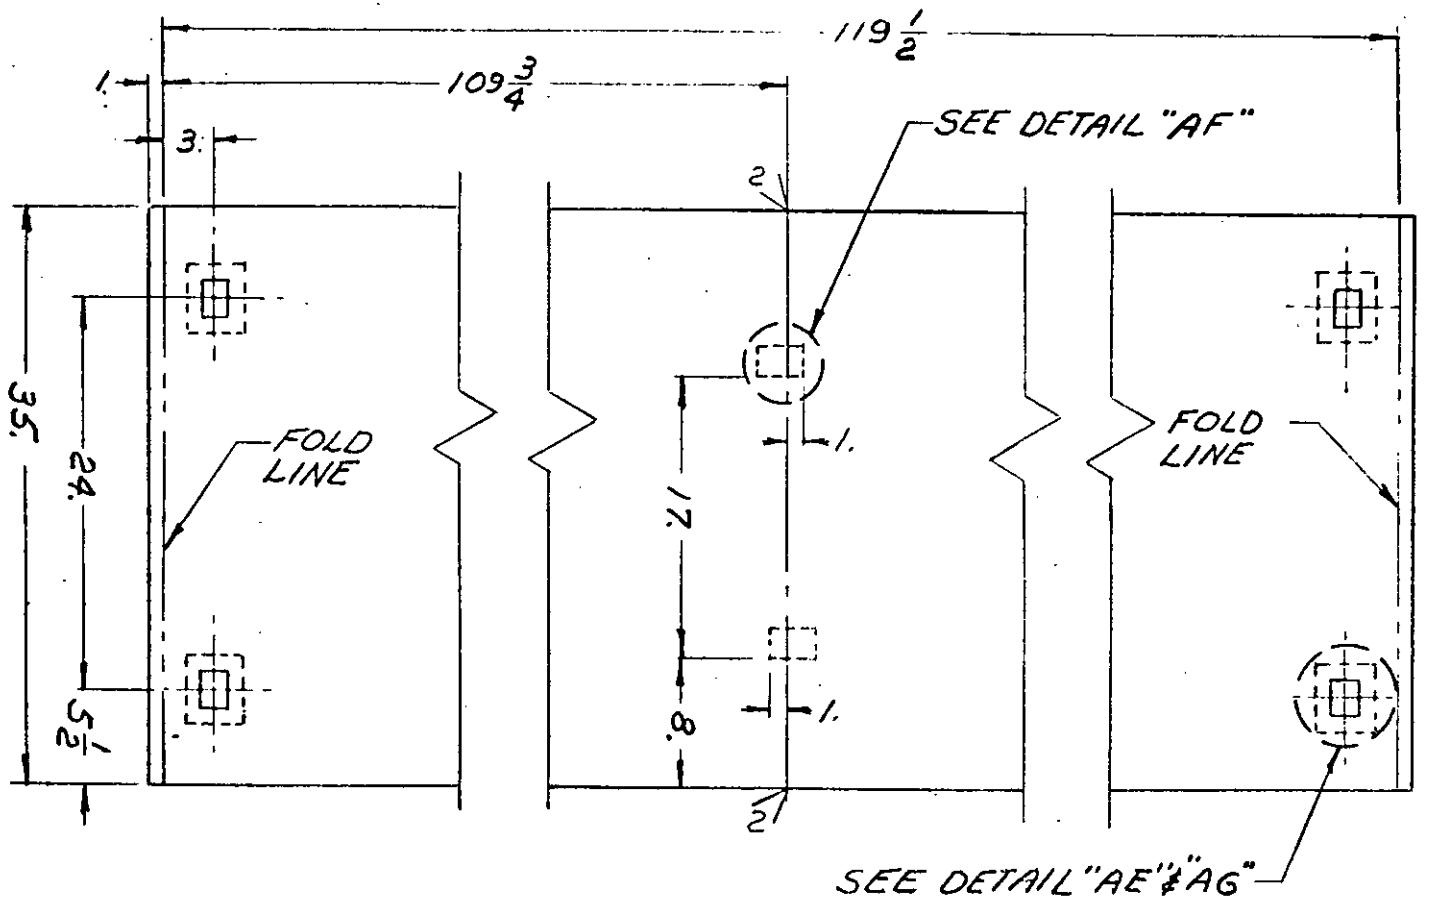

SPECIFICATIONS:
SEE FIG. 78

FIGURE 91
SECTION OF COVER TOP & SIDES


Source: https://assist.dla.mil -- Downloaded: 2026-04-17T18:18Z
Check the source to verify that this is the current version before use.

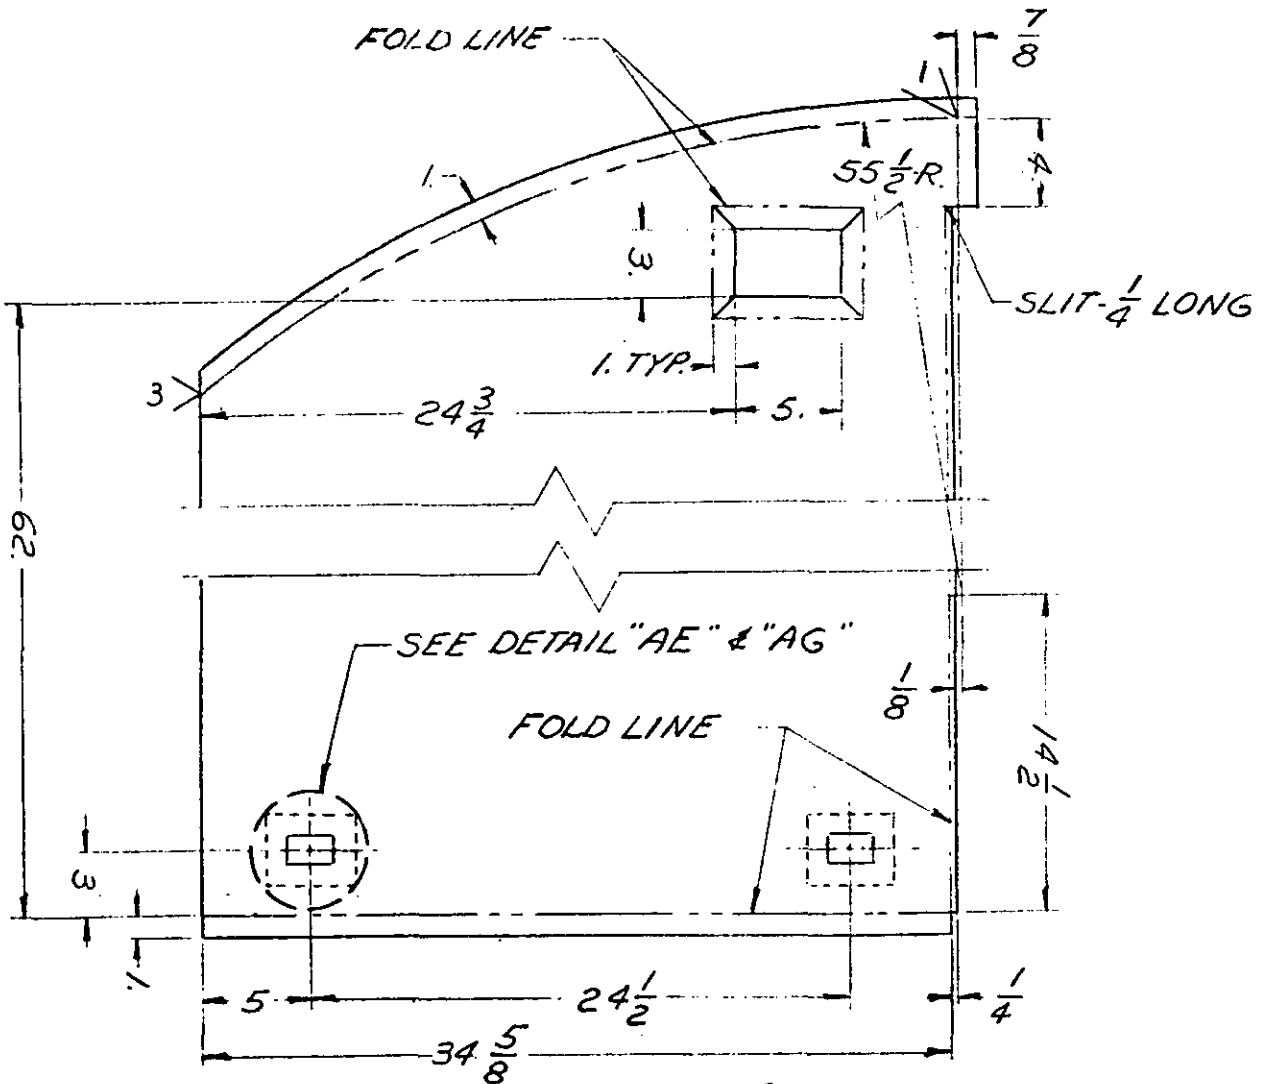

SPECIFICATIONS:
SEE FIG. 78

FIGURE 92
SECTION OF COVER-END


Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

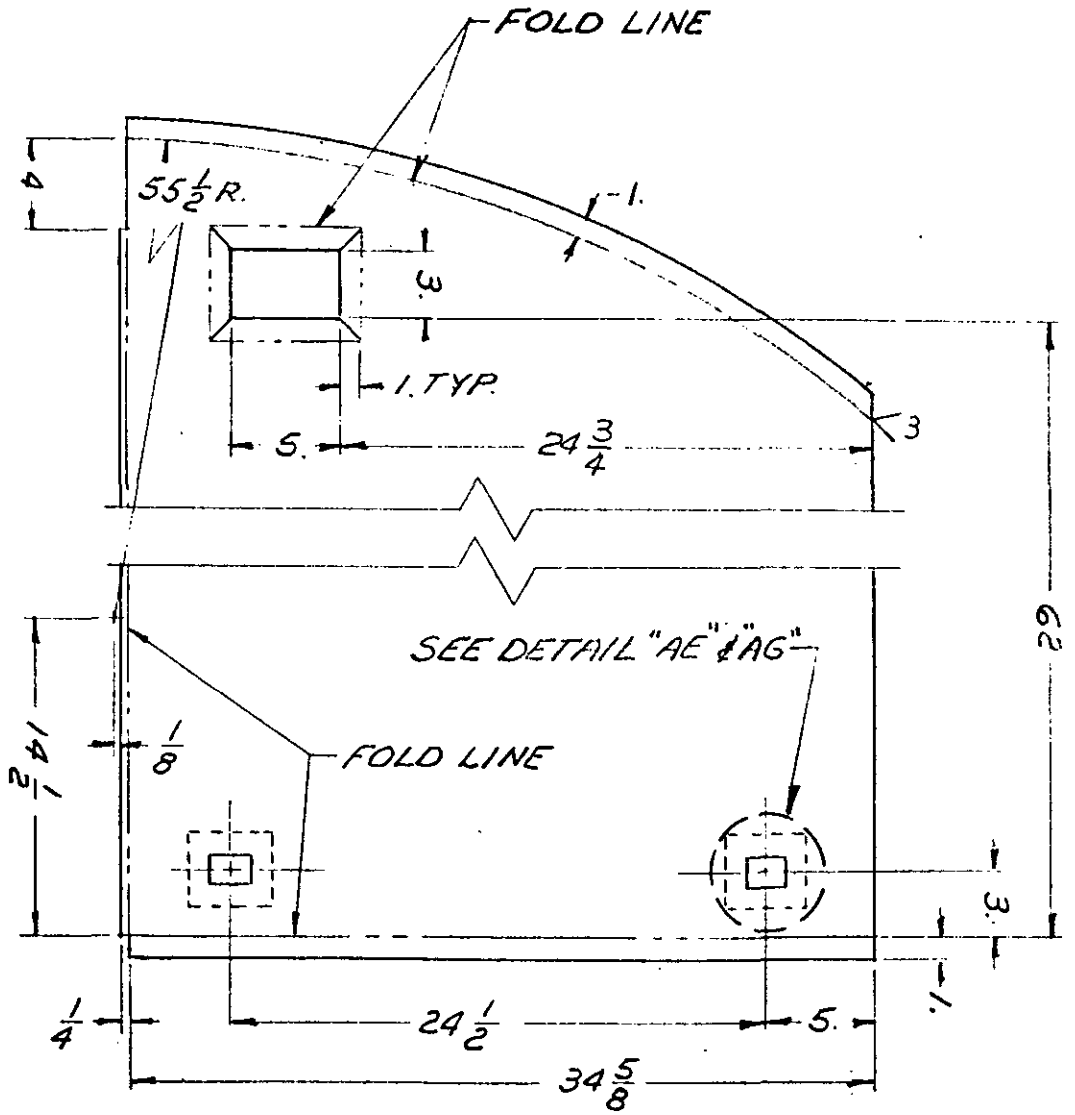

SPECIFICATIONS:
SEE FIG. 78

FIGURE 93
SECTION OF COVER - END


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

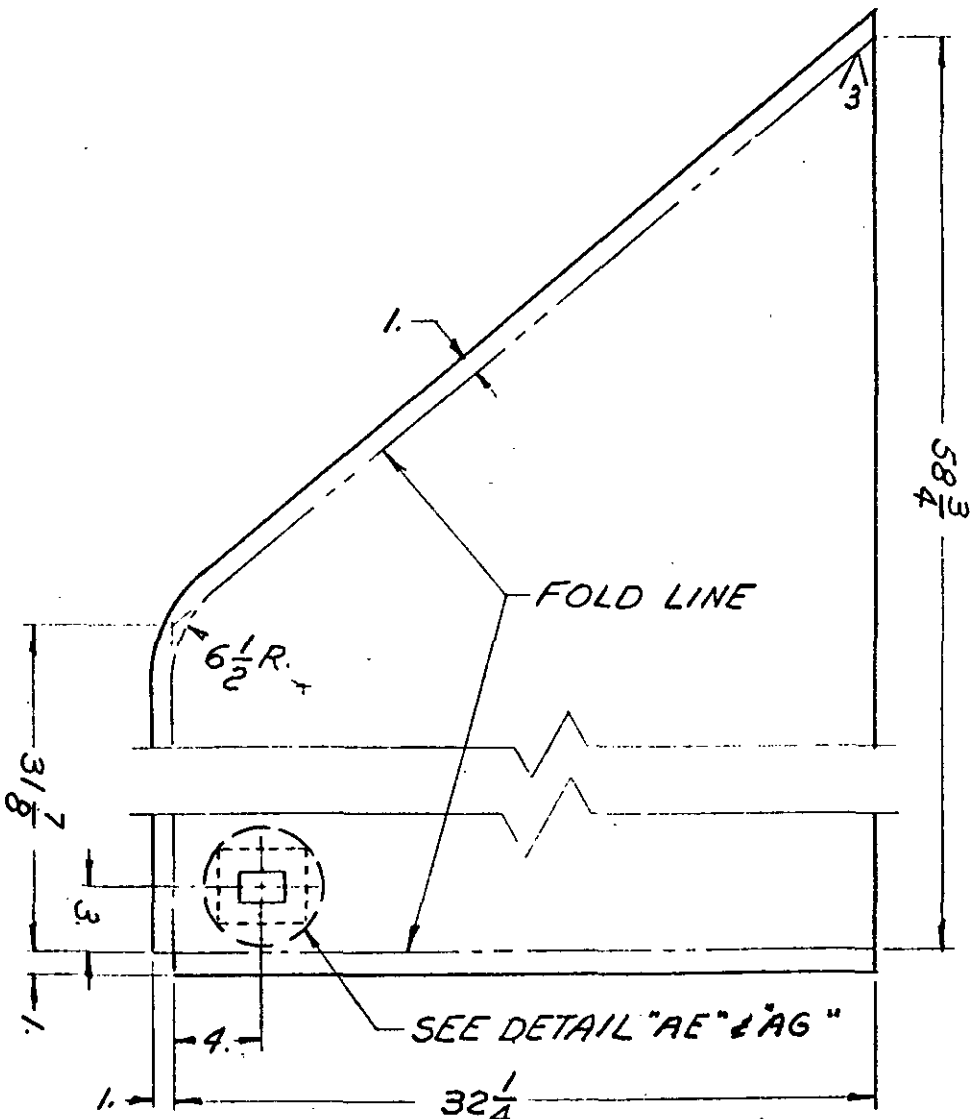

SPECIFICATIONS:
SEE FIG. 78

FIGURE 94
SECTION OF COVER-END


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

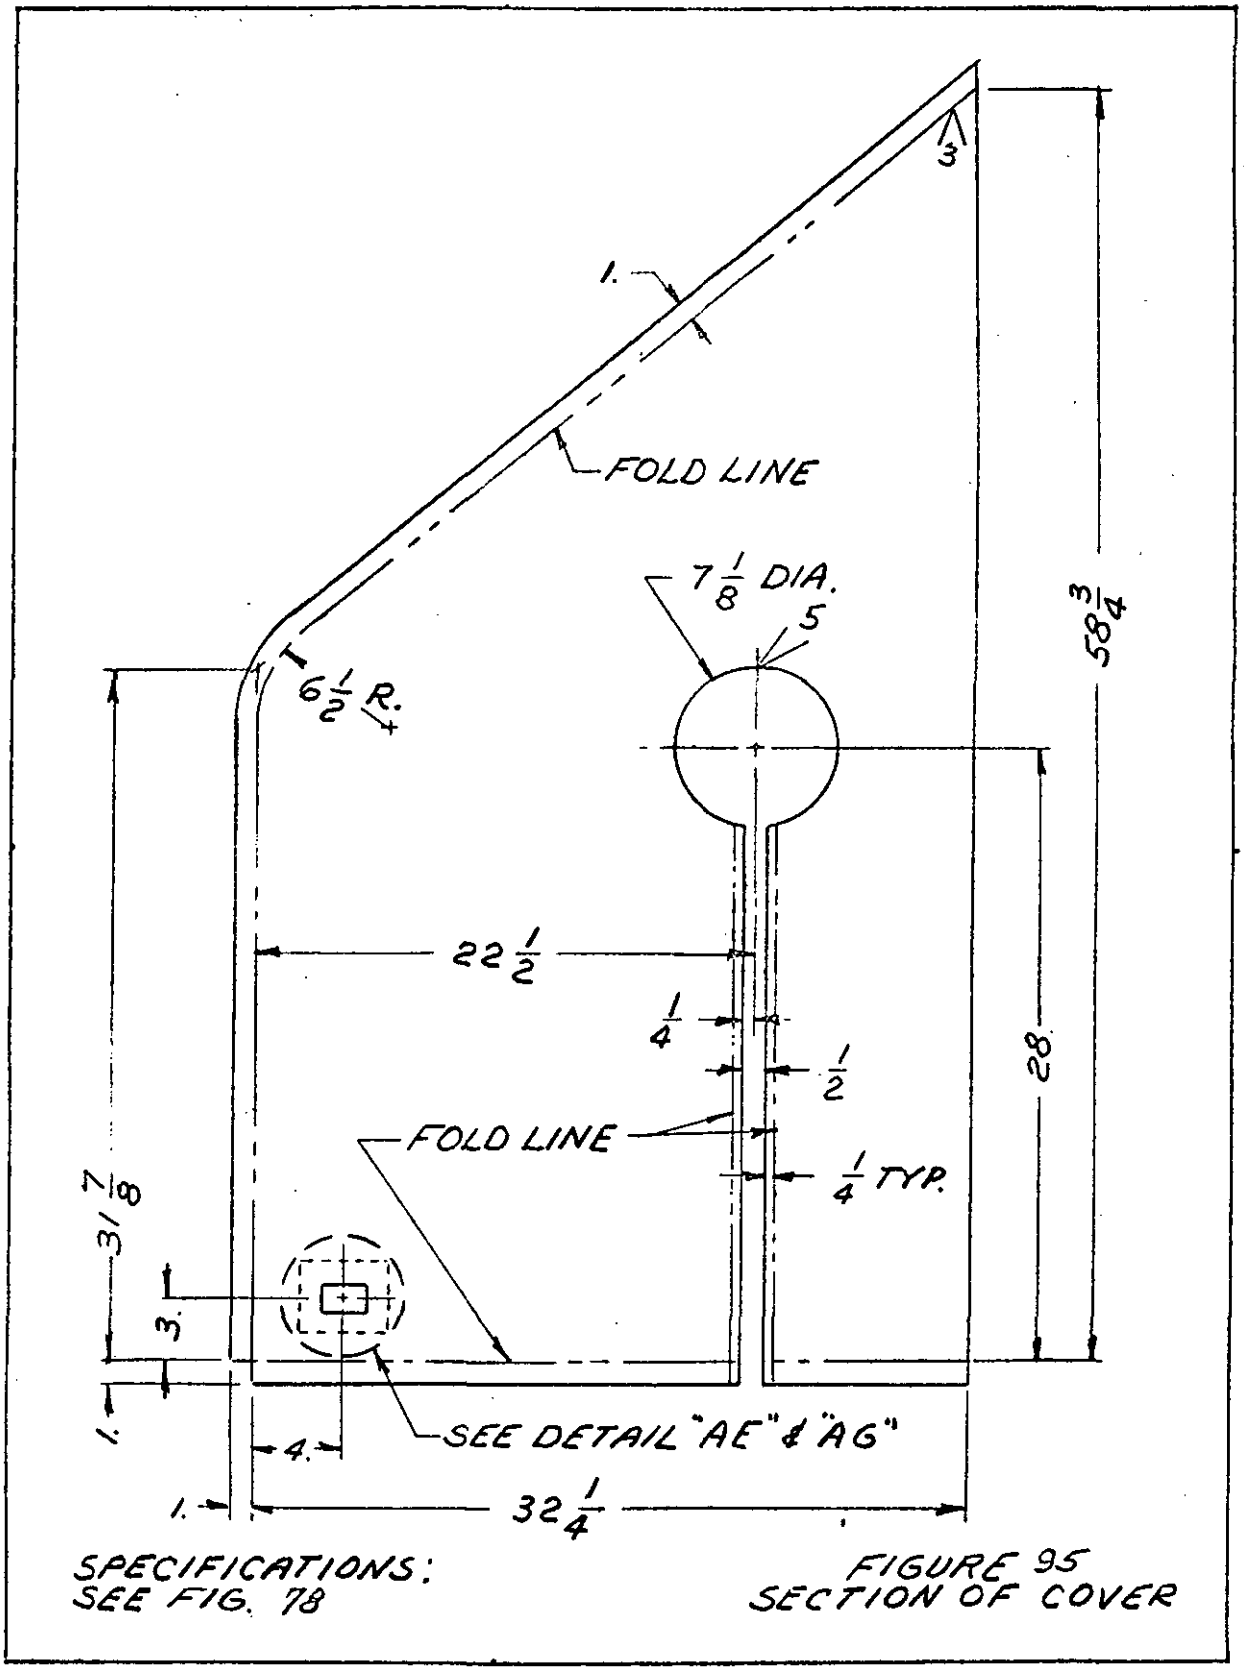


SPECIFICATIONS:
SEE FIG. 78

FIGURE 95
SECTION OF COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

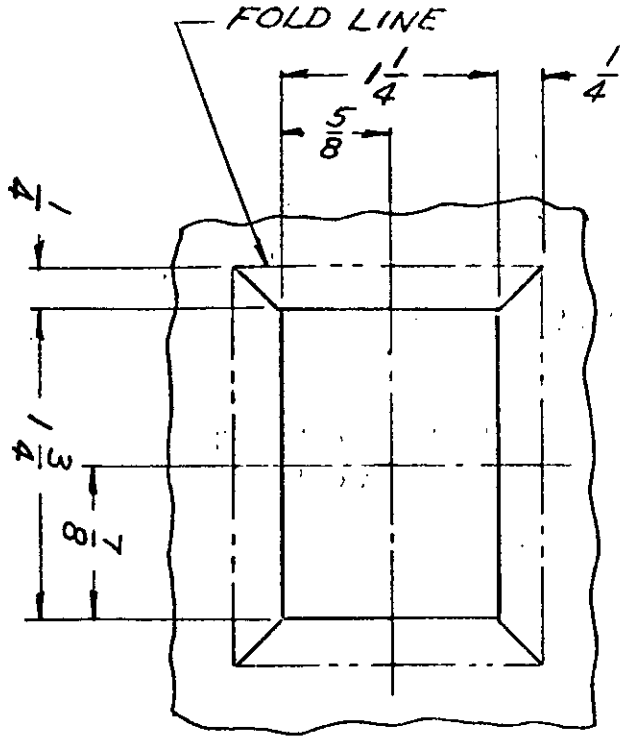

DETAIL "AE"
TYP. 32 PLACES
SEE DETAIL "AG"
SHOWING REINFORCEMENT
STITCHED IN PLACE

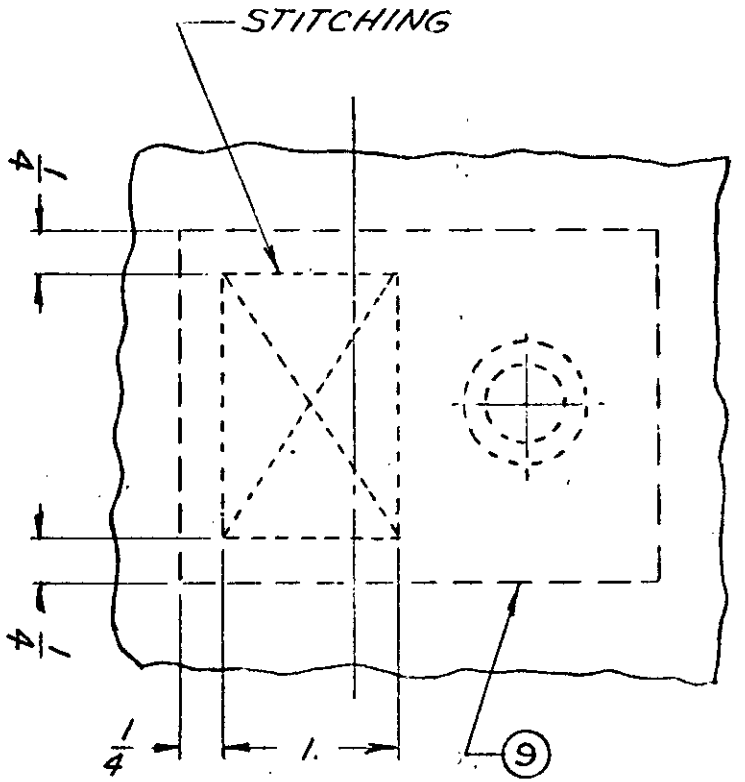


DETAIL "AF"
TYP. 16 PLACES

SPECIFICATIONS:
SEE FIG. 78

FIGURE 96

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

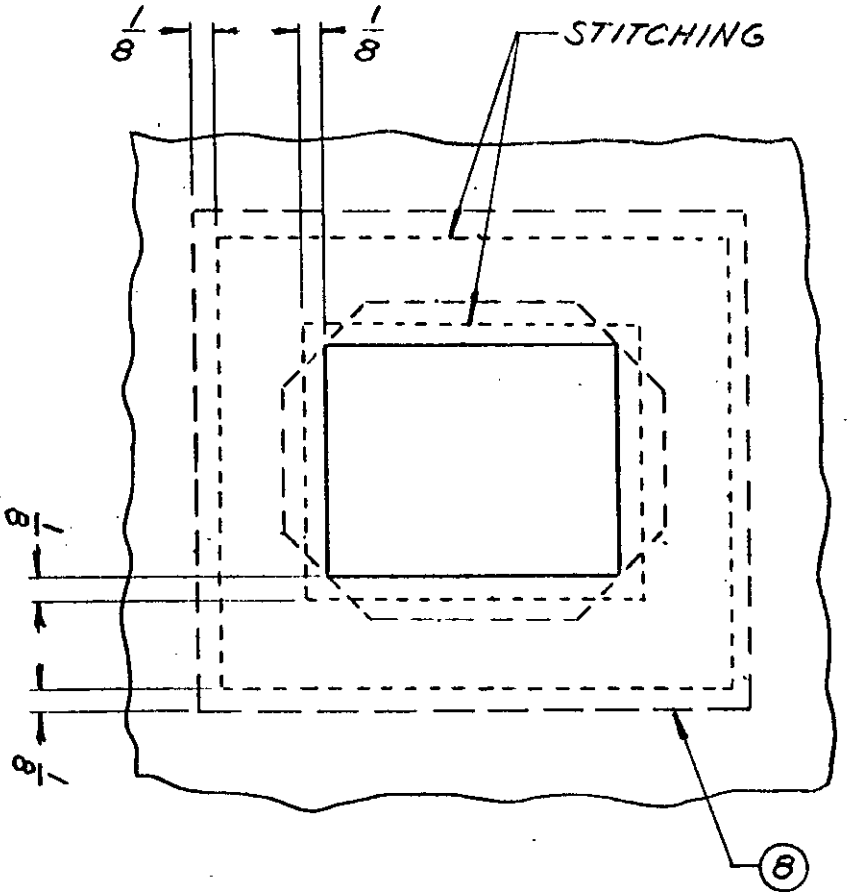


DETAIL "AG"
TYP. 32 PLACES

SPECIFICATIONS:
SEE FIG. 78

FIGURE 97


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

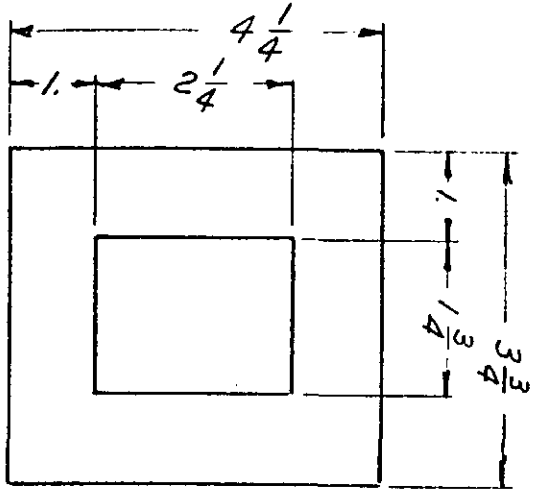

SPECIFICATIONS:
SEE FIG 78

FIGURE 98
REINFORCEMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

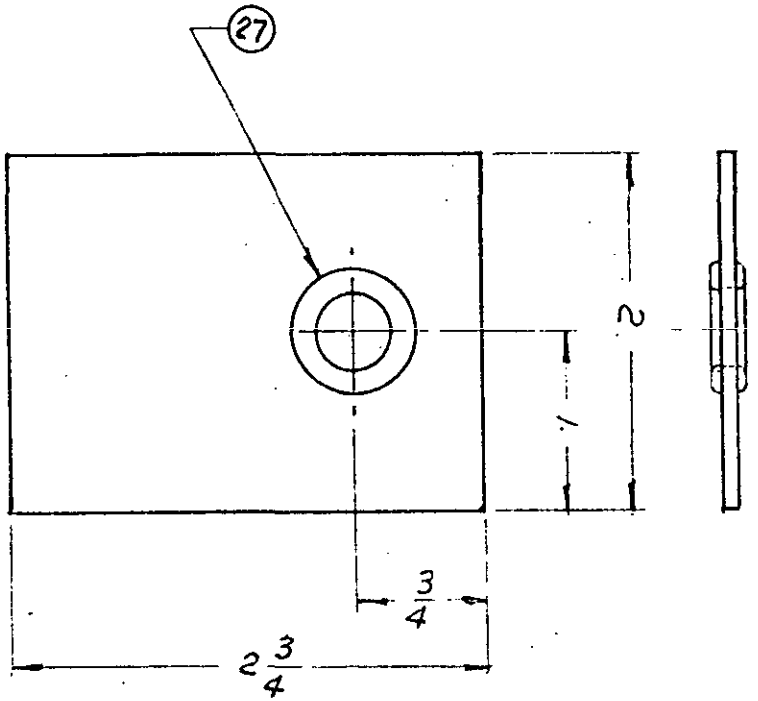

MATERIAL NOTE
COTTON WEBBING
TYPE III COLOR O.D.
WATER REPELLENT &
MILDEW RESISTANT
SPEC. MIL-W-530

FIGURE 99
WEBBING

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the currenversion before use.


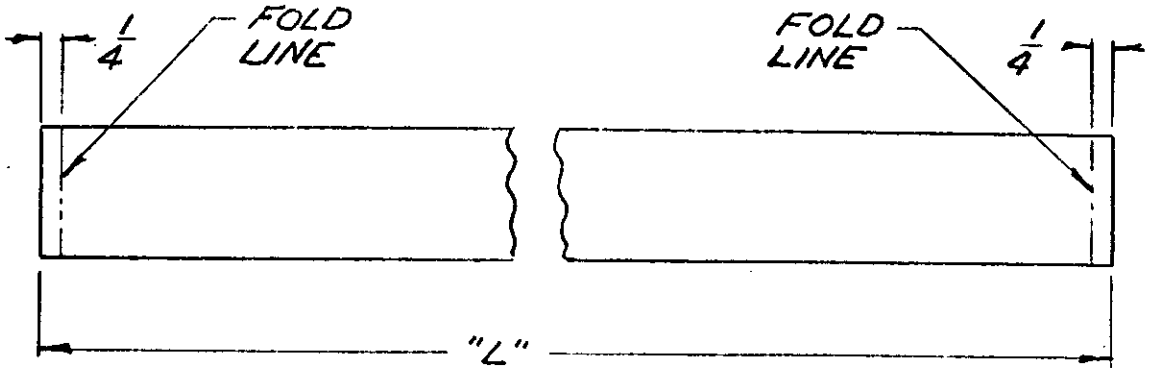


FIGURE NUMBER	REQ'D	"L"
FIGURE 100	4	15 1/4
FIGURE 101	4	26 3/4
FIGURE 102	4	33 1/4
FIGURE 103	4	20 3/4
FIGURE 104	2	22 1/4
FIGURE 105	3	30 1/2
FIGURE 106	4	22 3/4
FIGURE 107	1	17
FIGURE 108	1	20 1/2

SPECIFICATIONS:
SEE FIG 78

STRIP

Source: https://assist.dla.mil -- Downloaded: 202640-17T18:18Z
Check the source to verify that this is the current version before use.

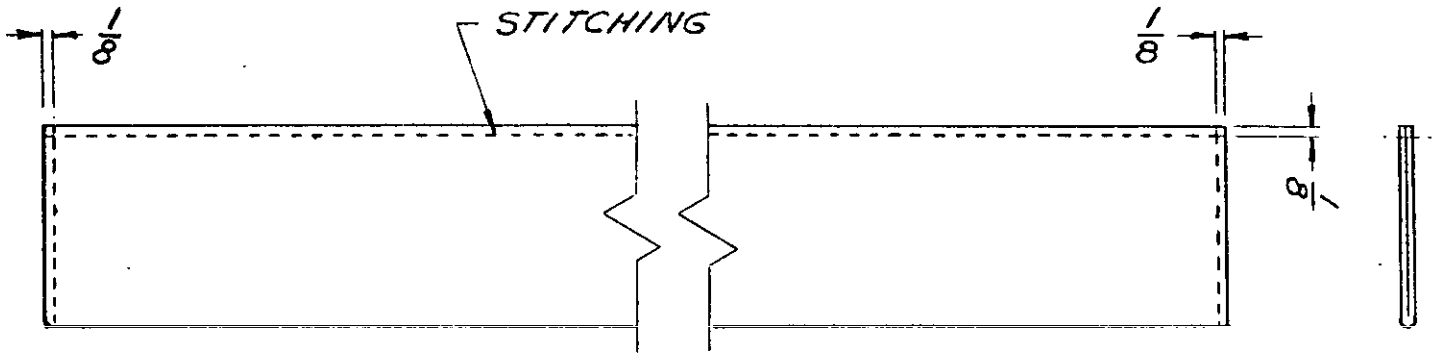


SPECIFICATIONS:
SEE FIG. 78

FOR DEVELOPMENT OF
ZIPPER FLAP SEE
FIGURE 109B

FIGURE 109A
ZIPPER FLAP


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

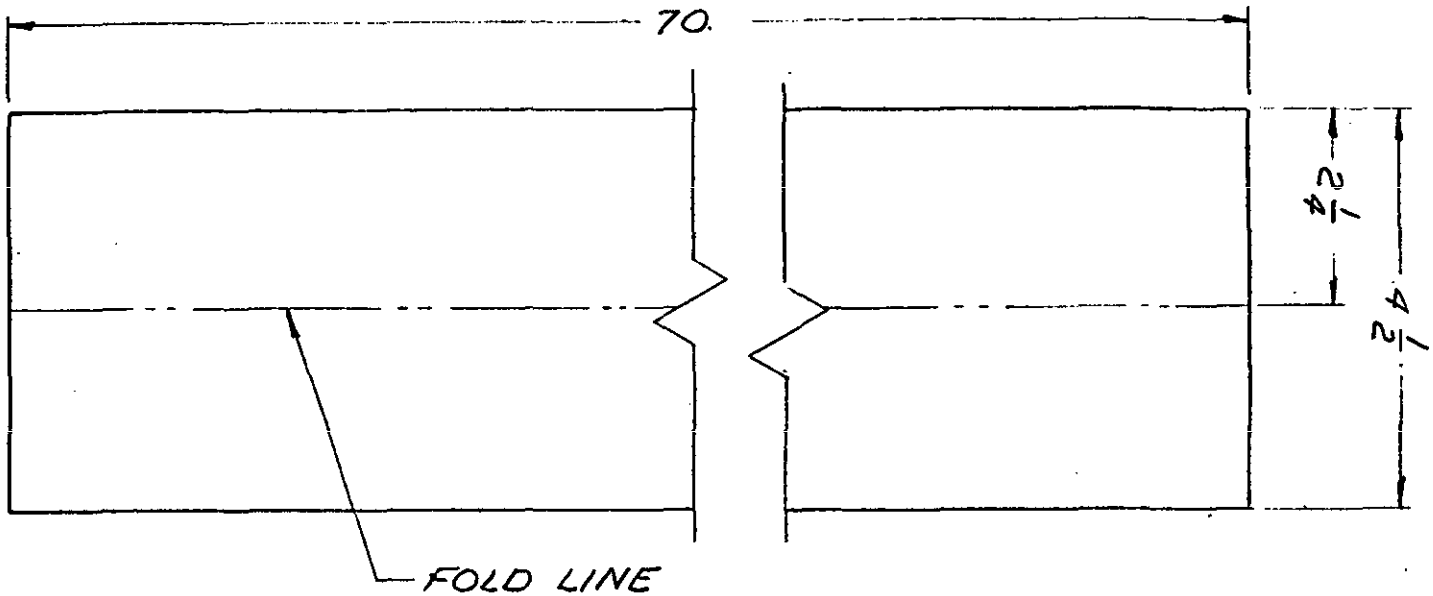

SPECIFICATIONS:
SEE FIG. 78

FIGURE 1098
DEVELOPMENT OF FIGURE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

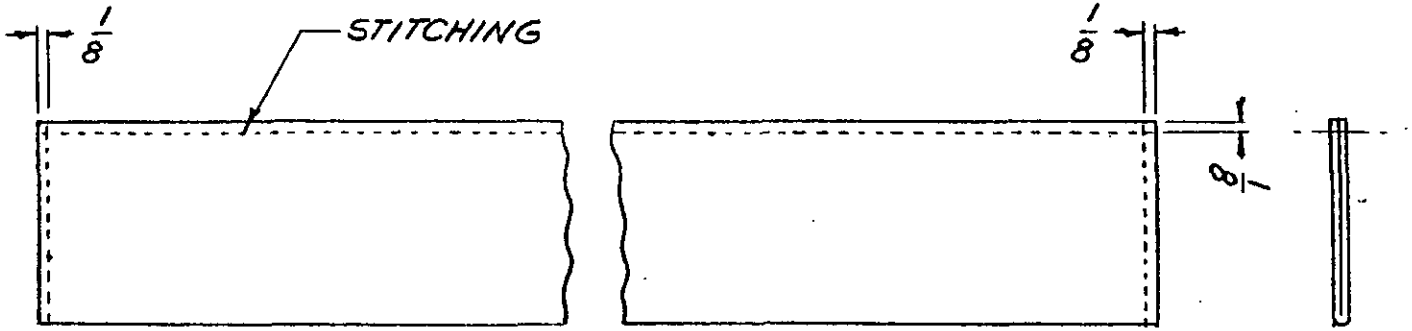


SPECIFICATIONS:
SEE FIG. 78

FOR DEVELOPMENT OF
ZIPPER FLAP SEE
FIG 110B

FIGURE 110A
ZIPPER FLAP


Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the currenversion before use.

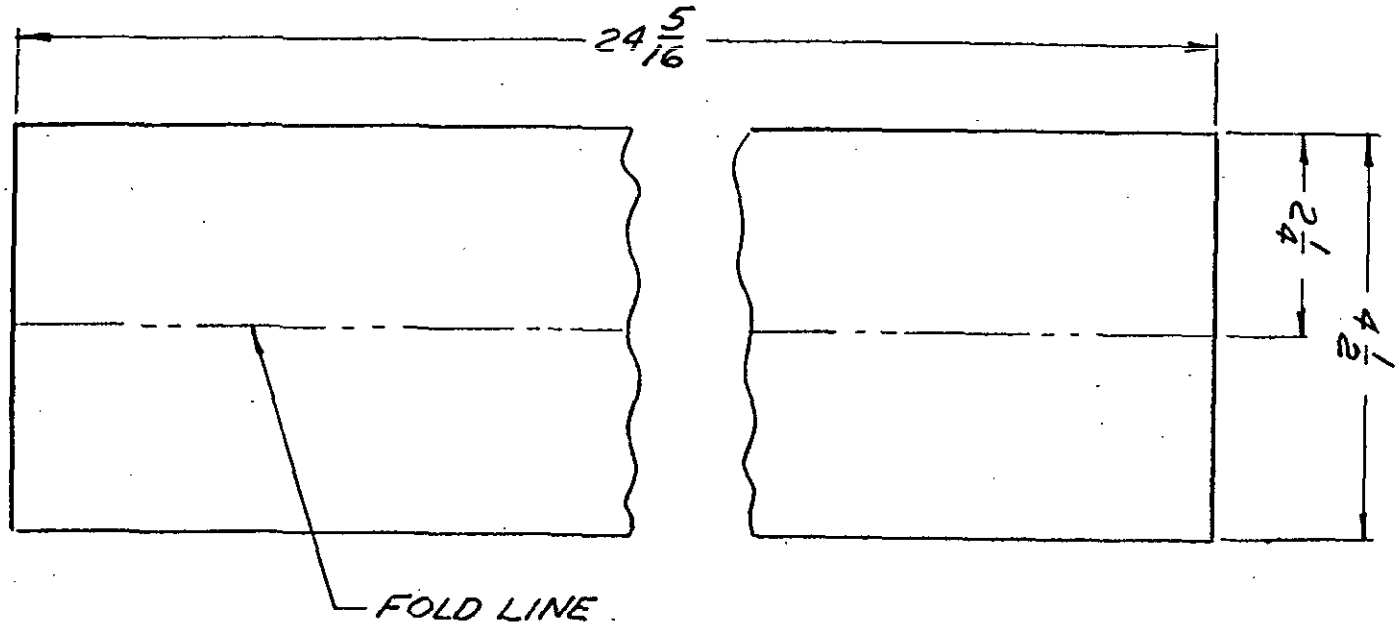

SPECIFICATIONS:
SEE FIG. 78

FIGURE 110 B
DEVELOPMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

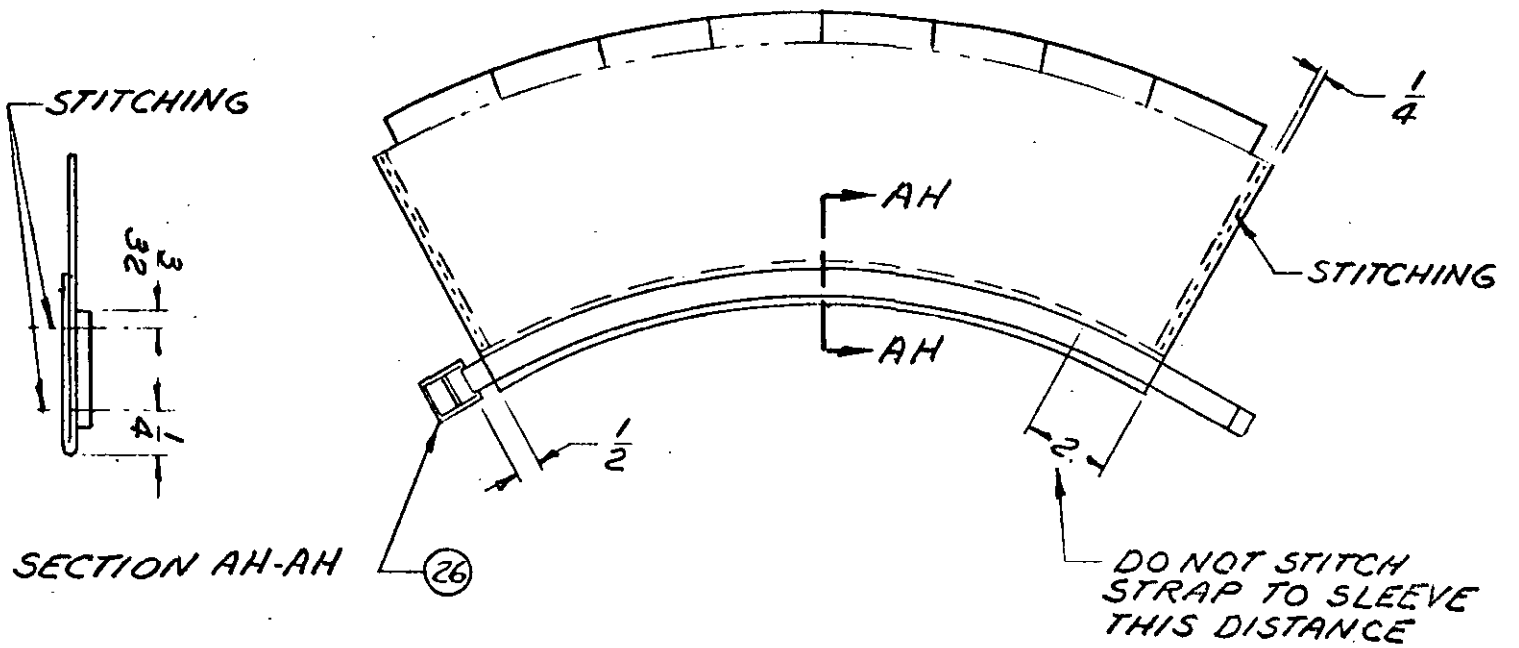


FOR DEVELOPMENT
SEE FIG. 111B

SPECIFICATIONS:
SEE FIG 78

FIGURE 111A
GUN TUBE SLEEVE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

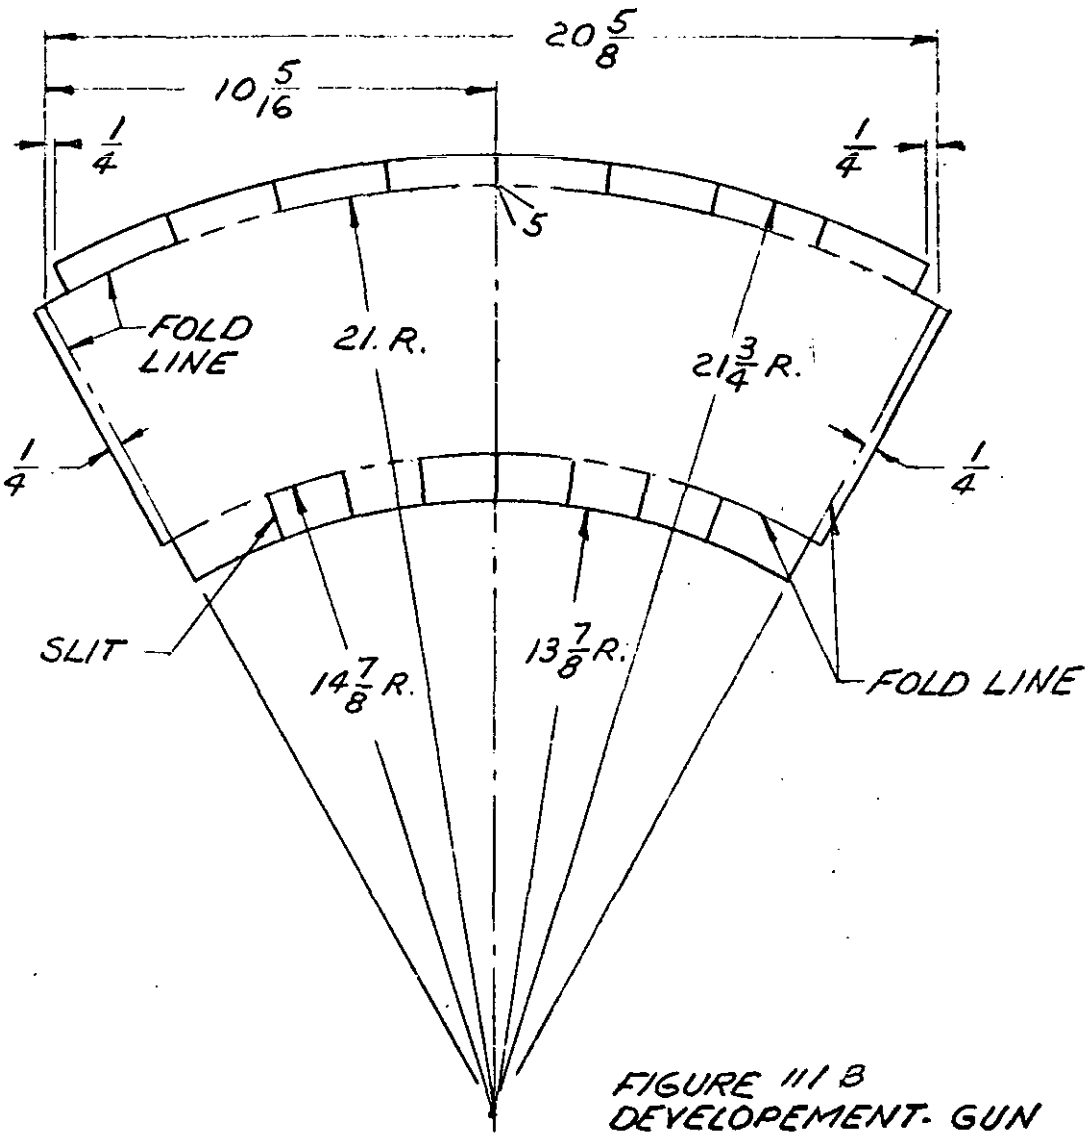

SPECIFICATIONS:
SEE FIG. 78

FIGURE 111 B
DEVELOPEMENT- GUN
TUBE SLEEVE

Source: https://assist.dla.mil - Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

PART LIST VENTILATOR COVER

ITEM NO.	FIG NO.	PART NAME	REQ'D.
1	114	COVER SECTION-TOP	1
2	115	COVER SECTION-SIDE	2

STANDARD HARDWARE

ITEM NO	REQ'D.	PART NAME	SIZE	ORDNANCE PART NO.
3	2	FASTENER, BUTTON	11/64 LG.	425937
4	2	FASTENER, SOCKET		425936
5	2	FASTENER, STUD		190285
6	2	FASTENER, EYELET	1/4 LG	425935

SPECIFICATION:

MATERIAL NOTE:
FABRIC COATED NYLON
STYLE II TYPE NF (FLAME REQUIREMENTS OF STYLE R)
SPEC. MIL-C-20696
COLOR OLIVE DRAB OR FOREST GREEN

ALL SOURCES MUST SUPPLY AN ITEM EQUIVALENT TO THE MANUFACTURERS ITEM INDICATED, ORDNANCE CORP. APPROVAL REQUIRED.

APPROVED SOURCE:
DURACOTE CORP.
RAVENNA, OHIO
THEIR MATERIAL NO. 650-44

> DENOTES MATCH POINT. LIKE NUMBERS MATCH.

FIGURE 112A

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

OPTIONAL THREAD
CLARKS "TRUSEW"
MACHINE TWIST NO. 24
ORLON, COLOR O.D.


THREAD, NYLON
TYPE II, CLASS I
SIZE F, COLOR O.D.
SPEC. V-T-295

NOTE:
STITCHING, TYPE 301 PER SPEC. FED. STD. NO. 751
8-10 STITCHES PER INCH. SMALLEST NEEDLE
SIZE FEASIBLE SHOULD BE USED IN ORDER
TO ASSURE WEATHER PROOF SEAMS


SEAM ALL ALLOWANCE MAY VARY
TO SUIT MANUFACTURER


FIGURE 112B

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.




DETAIL "AJ"

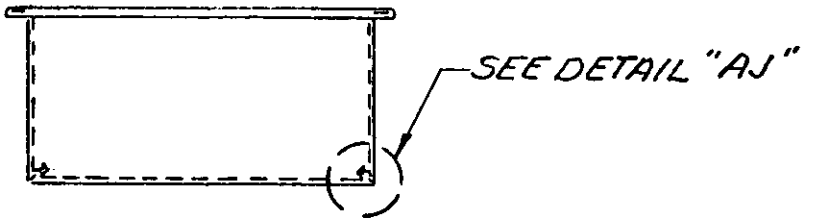




SECTION AK-AK

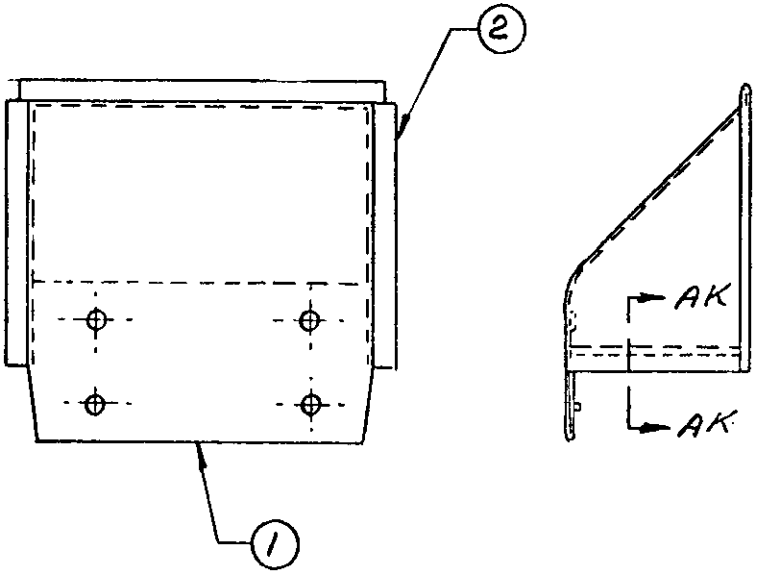


SPECIFICATIONS:
SEE FIG. 112.

FIGURE 113
VENTILATOR COVER

Source: https://assist.dla.mil -- Downloaded: 2026-01-17T10:40Z
Check the source to verify that this is the current version before use.

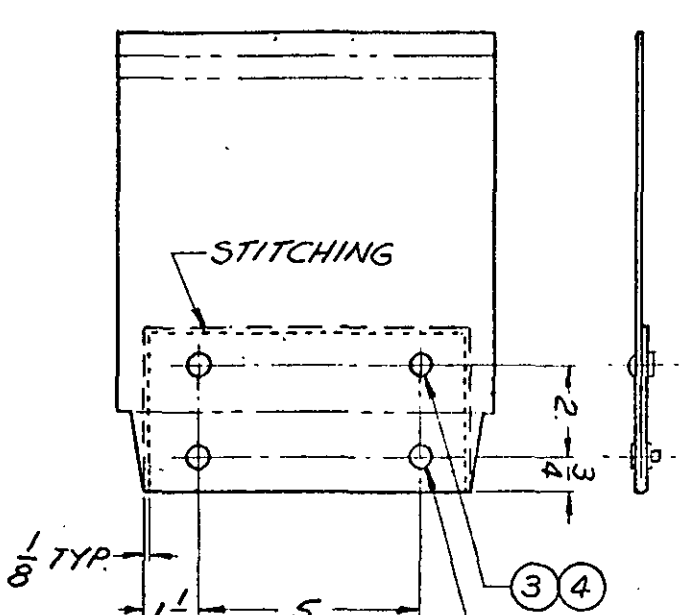

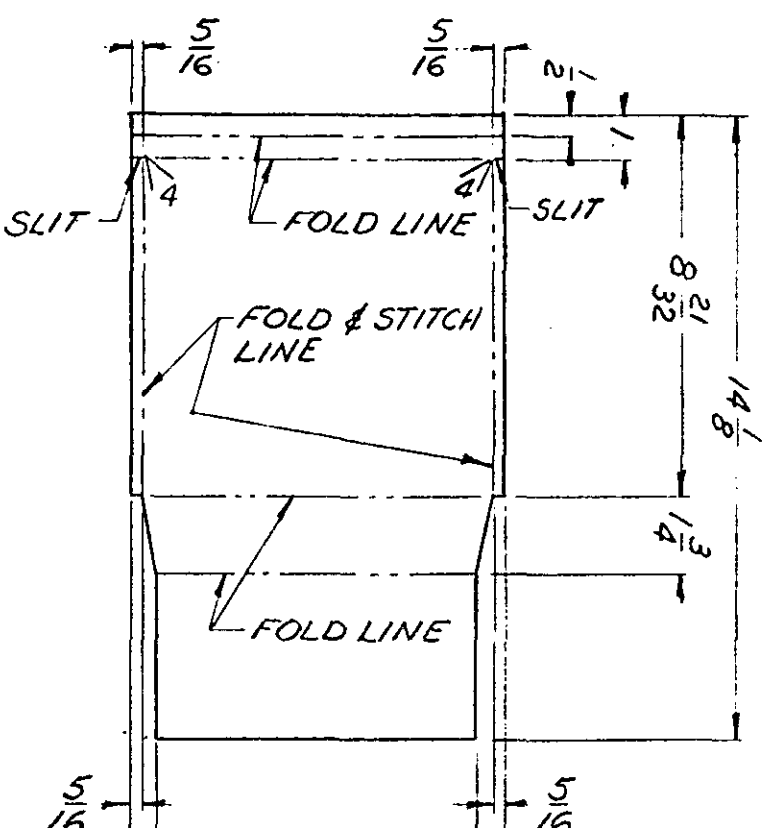


DEVELOPMENT

SPECIFICATIONS:
SEE FIG. 112

FIGURE 114
COVER SECTION - TOP

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

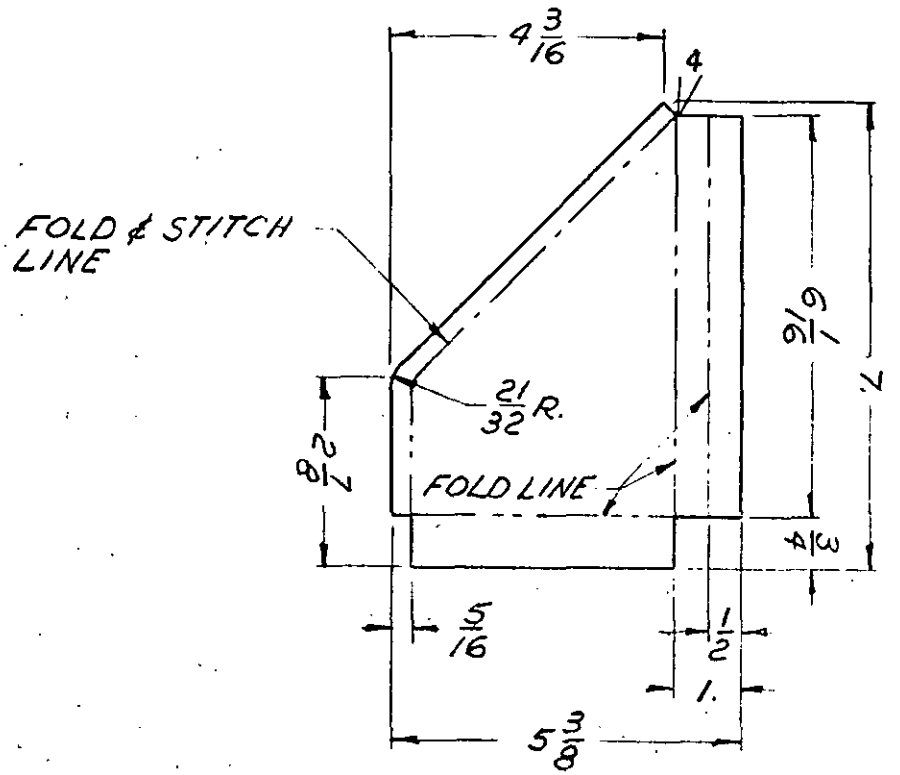

SPECIFICATIONS:
SEE FIG 112

FIGURE 115
COVER SECTION - SIDE

Source: https://assist.dla.mil - Downloaded: 2026-04-17T18:18Z
Check the source to verify that this is the current version before use.

PARTS LIST - VENTILATOR FRAME

ITEM NO.	FIG NO	PART NAME	REQ'D.
1	113	FRAME	1
2	119	ROD	4

SPECIFICATIONS:

MATERIAL NOTE

I STEEL-CARBON FS1010 THRU FS1020
SPEC. QQ-S-634
3/16 DIA.

WELDING NOTE - STEEL


I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I BASE PHOSPHATE
IN ACCORDANCE WITH TYPE I
SPEC. TT-C-490
PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 116

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:18Z
Check the source to verify that this is the current version before use.

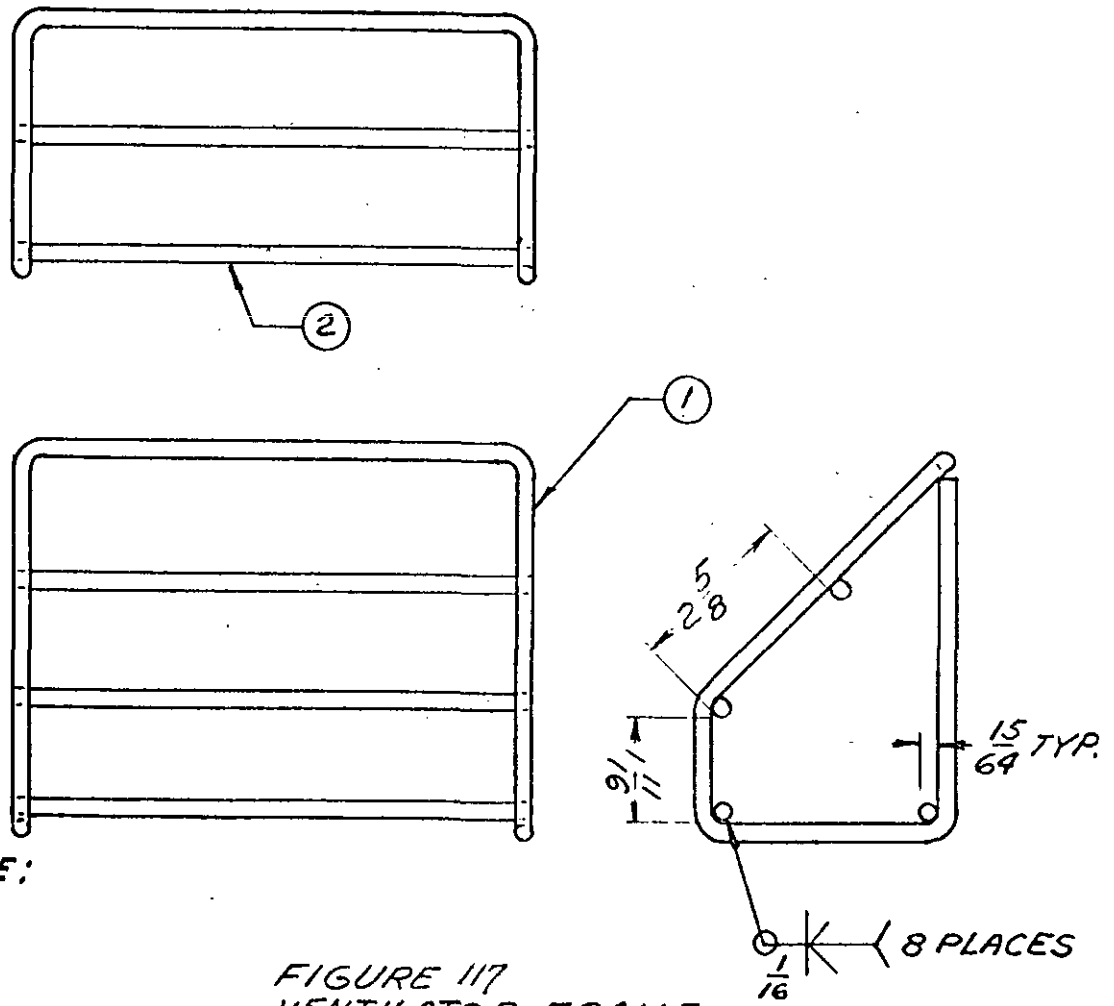


PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG.

WELDING NOTE:
SEE NOTE I, FIG. 116

FIGURE 117
VENTILATOR FRAME

Source: https://assist.dla.mil -- Downloaded: 2026-04-17T18:18Z
Check the source to verify that this is the current version before use.

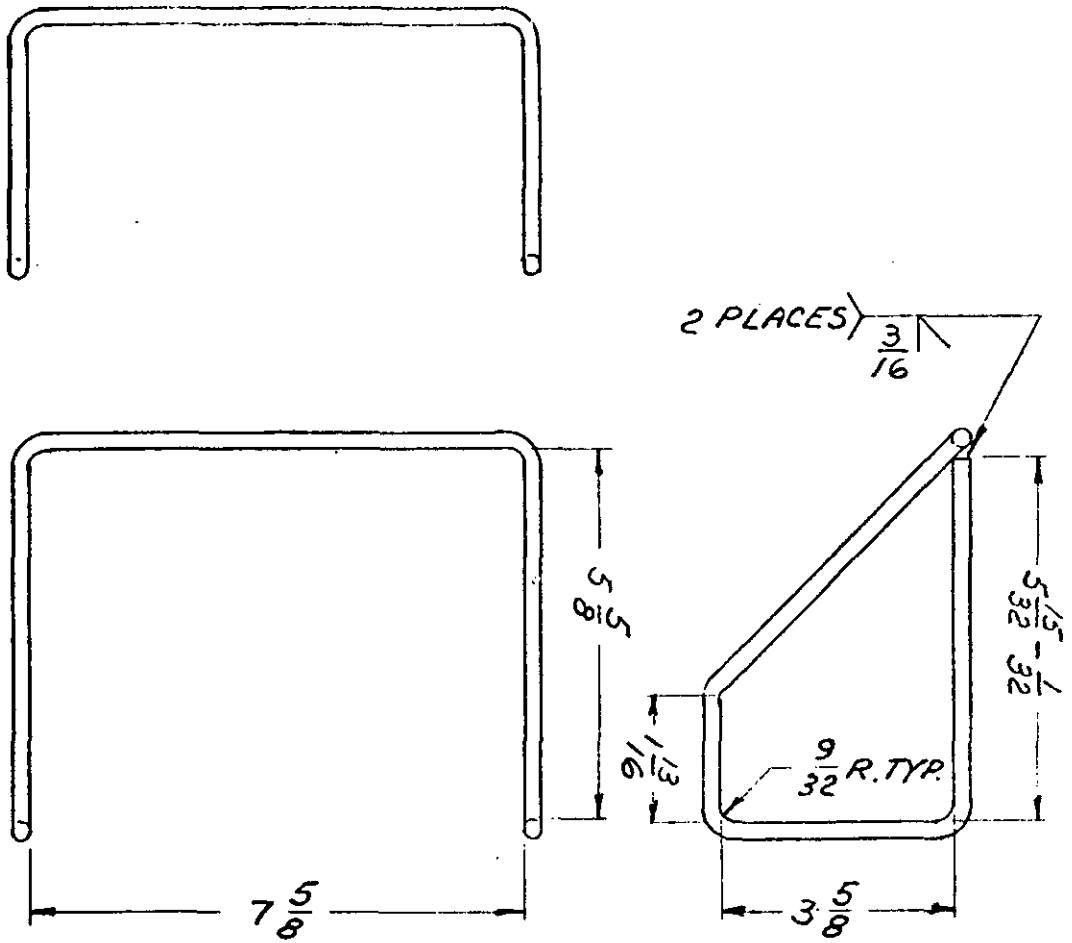


WELDING NOTE:
SEE NOTE I, FIG. 116

MATERIAL NOTE:
SEE NOTE I, FIG 116

FIGURE 118
FRAME

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.

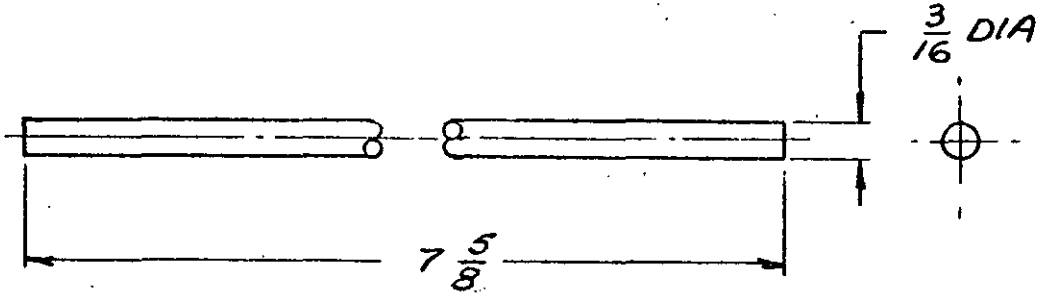

MATERIAL NOTE:
SEE NOTE 1, FIG 116

FIGURE 119
ROD

Source: https://assist.dla.mil -- Downloaded: 202640-17T18:18Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity

SPECIFICATION MIL-T-11527B(AT)

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:18Z
Check the source to verify that this is the current version before use.